


Program Valve Cap Sensor with ContiConnect App (Phone)


Scan for video walk-through, other trainings, and Spanish translations.




Time estimate: **5-10 min**

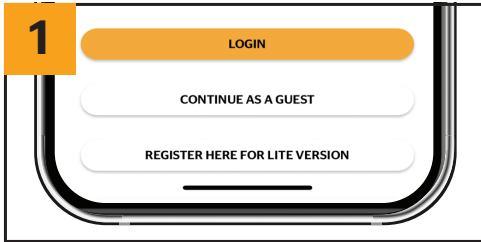


Open the ContiConnect On-Site app and log in. Ensure the app has access to the device's camera for reading the QR code in a later step.

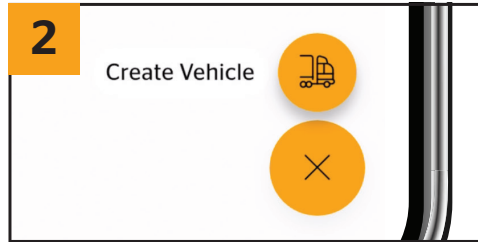


On bottom right of main screen select plus symbol and select "Create Vehicle".

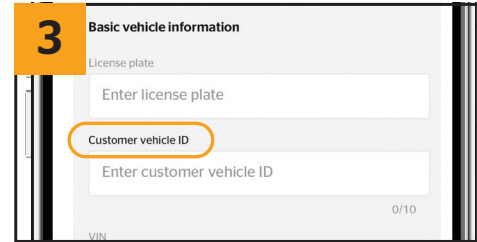


Enter in necessary info, info that must be entered is as follows: a.) Customer vehicle ID, b.) Vehicle Group, c.) Vehicle Type, d.) Manufacturer, e.) Product Type

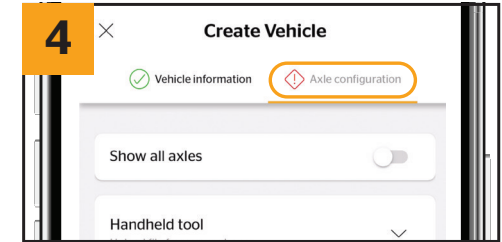


At top of the screen select "Axle Configuration".

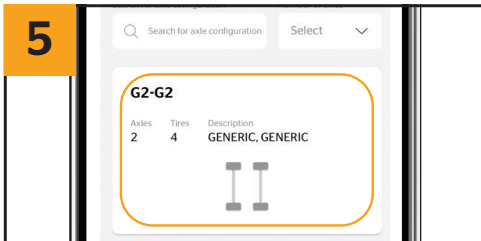


Select correct type of configuration for vehicle that is being programmed.

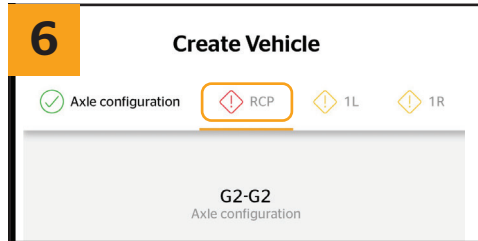


At the top of the screen select RCP (Recommended Cold Pressure).

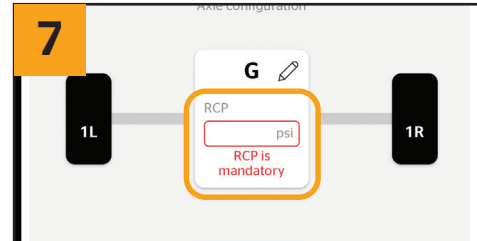

Each axle needs to have an RCP entered.

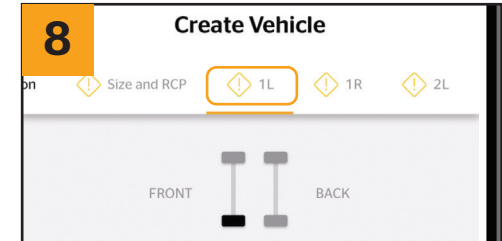


At the top of the screen select 1L (First axle, left side tire).

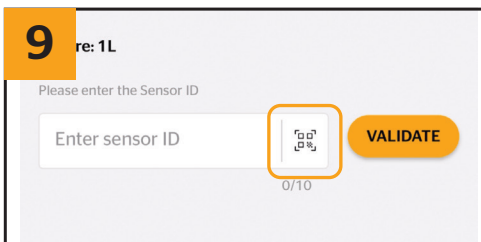


Valve Cap sensors feature a QR code on top for scanning with the app's QR-reader. Tap the QR code icon in the app to open your device's camera. You may need to allow camera access if you have not already.



Scan the QR code on the Valve Cap sensor with your phone to assign the sensor to the selected tire position. You can also manually enter the sensor ID written on top of the valve cap.

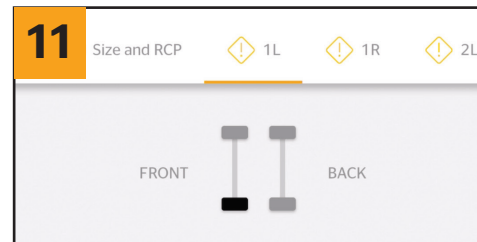

Continue this process for all tires.

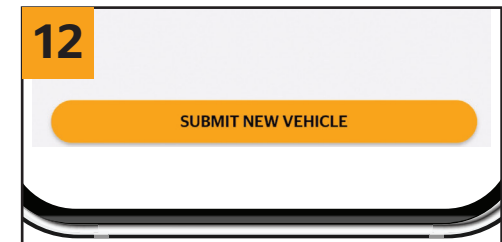

On summary page click submit new vehicle.