

2025

# Product Data Guide

Truck, Bus & Trailer Tires



Innovative Tire Technology  
Full Tire Life Cycle / ContiTread  
Digital Tire Monitoring Solutions

# 2025 Product Data Guide

## Truck, Bus and Trailer Tires to fit your needs.

**As an international partner to the transport and logistics industry,** we know the markets as well as we know the roads around the world. And we also know that ultimately, cost effectiveness is what matters.

But just like roads, no two operations are the same. That's why we developed Continental Truck Tires - the ideal solution to deliver your **Lowest Overall Driving Cost.**

As one of the largest automotive suppliers and tire manufacturers in the world, Continental develops pioneering technologies to make your fleet safer, more efficient, and more connected. With innovative tire technology and digital fleet solutions, Continental optimizes your tire management.

**Count on Continental to recommend the best tires and solutions for your specific fleet needs.**

#### IMPORTANT NOTE:

Product details are subject to change. If the information you are looking for is not in this data guide, please visit [www.continental-truck.com](http://www.continental-truck.com) or contact your local sales representative for the most up to date information.

Scan for a digital version of this document **and more!**



[www.continental-truck.com](http://www.continental-truck.com)

# Table of Contents

\*Available in ContiTread

## Product Overview

Tire Availability Chart.....	03
Tire Comparison Chart .....	04
Application Guide .....	05
Vocation Reference Guide .....	06
New Tire Product Overview .....	07
Retread Availability Chart .....	13
Retread Comparison Chart .....	15
ContiTread Product Overview.....	17

## Product Data

### Long Haul ..... 21

Long Haul Product Overview.....	22
Conti EcoPlus HS3+ .....	23
Conti Coach HA3.....	24
Conti HSL 3.....	25
Conti HDL 3 LTL* .....	26
Conti HDL 3 EP.....	27
HDL2 Eco Plus* .....	28
HDL2+ Eco Plus.....	29
HDL2 DL+*.....	30
HDL2 DL Eco Plus.....	31
Conti HTL 3 .....	32
Conti EcoPlus HT3*.....	33
HTL1* .....	34
HTL2 Eco Plus (17.5").....	35
Long Haul Retread Products.....	37

### Regional..... 42

Regional Product Overview.....	43
--------------------------------	----

Conti HSR 3*.....	45
HSR2.....	46
HSR2 SA.....	47
HTR2.....	48
HDR2+* .....	49
HDW2*.....	50
Conti Scandinavia HD3* .....	51
HDR.....	52
Conti Hybrid HT3*.....	53
Conti LAR 3 (16").....	54
LSR1 (17.5")* .....	55
HTR2 (17.5")* .....	56
Conti HSR 5 (19.5")* .....	57
Conti Hybrid HS3 (19.5").....	58
Conti HDR 5 (19.5")* .....	59
Conti Hybrid HD3 (19.5") .....	60
Conti Scandinavia HD3 (19.5") .....	61
Conti Hybrid HT3 (19.5") .....	62

### Regional Retread Products ..... 63

### Urban ..... 68

Urban Product Overview.....	69
Conti HAU 5.....	70
Conti Urban HA3.....	71
Conti HAU 3 WT*.....	72

### Urban Retread Products..... 73

### Construction ..... 75

Construction Product Overview.....	76
Conti HSC 3* .....	77
Conti HAC 3 .....	78

Conti HDC 3*.....	79
HDC1 HT*.....	80

### Construction Retread Products..... 81

### Off-Road ..... 86

Off-Road Product Overview.....	87
HCS* .....	88
Conti Terra HD3 (19.5").....	89
Off-Road Retreads.....	90

## Digital Solutions

### Digital Solutions Overview ..... 11

Truck & Trailer Solution.....	91
Standalone Trailer Solution.....	92
ContiConnect Yard .....	93

## Tables/Charts

Medium Truck Load/Inflation Tables.....	95
Load Limits at Various Speeds .....	99
Reading Tire Information .....	101
Definitions.....	104
Low Aspect Ratio Tires .....	105
Service Descriptions .....	106
Load Index Numbers .....	107
Tread Wear Conversion Table .....	108
Retread Casing Fitment Guide .....	109
Safety Warnings .....	110
Delivery Receipt (D9) .....	113
Warranty Information .....	114

## Continental Highlights

Digital Tire Monitoring Solutions .....	11	SmartWay® Verified .....	41
ContiLifeCycle Retread Stages .....	16	Conti360° Fleet Services .....	74
ContiLink .....	19	TrukFix Road Service Program .....	84
Continental 3G Casing.....	20	HorsePower Rewards Program.....	85
Dealer Marketing Suite .....	36	ContiTireDrive App.....	115

PRODUCT OVERVIEW

# Tire Availability Chart

## Medium Radial Truck Tires

LOAD RANGE	A	B	C	D	E	F	G	H	J	L	M	N
PLY RATING	2	4	6	8	10	12	14	16	18	20	22	24








TIRES & SIZES Load Range & Tread Depth (32 <sup>nds</sup> )	19.5" & SMALLER								22.5" & 24.5"												SUPER SINGLE & WIDEBASE																			
	LT215/85R16	LT225/75R16	LT235/85R16	LT245/75R16	10R17.5	215/75R17.5	235/75R17.5	245/70R17.5	225/70R19.5	245/70R19.5	265/70R19.5	285/70R19.5	10R22.5	11R22.5	12R22.5	255/70R22.5	275/70R22.5	275/80R22.5	295/75R22.5	295/60R22.5	305/70R22.5	305/85R22.5	315/80R22.5	285/75R24.5	11R24.5	12R24.5	325/95R24 (Tube Type)	385/65R22.5	425/65R22.5	445/50R22.5	445/65R22.5									
<b>STEER / ALL-POSITION</b>																		G/H-19								G/H-19	J-15													
Conti EcoPlus HS3+																																								
Conti EcoPlus HS3																																								
Conti Coach HA3																																								
Conti HSL 3																		H-20								G/H-20														
Conti HSR 3																		G/H-23	H-23					H-23					H-23	H-23										
HSR2																		G-20	G/H-23	H-23					H-23					H-23	H-23									
HSR2 SA																					H-18	J-18							L-19											
HTR2																																		L-21	L-22					
Conti Urban HA3																																								
Conti HAU 5																																								
Conti HAU 3 WT																																								
Conti HSC 3																		H-24	H-24									L-24	H-24	H-24										
Conti HAC 3																																		L-22	L-24		M-23			
HCS																																		J-40				L-27		
<b>DRIVE</b>																		G-24								G/H-24					H-24									
Conti HDL 3 LTL																																								
HDL2 Eco Plus																																								
HDL2+ Eco Plus																																								
HDL2 DL+																		G/H-32							G-32			G-32	H-32	H-32										
HDL2 DL Eco Plus																		G-32							G-32															
HDR2+																		G-24	G/H-30	G-30					G/H-30			G-30	H-30											
HDR																																								
HDW2																		H-27							H-27					H-27										
Conti Scandinavia HD3																		H-27											H-27											
Conti HDC 3																		H-30											H-30											
HDC1 HT																		H-32											H-32											
<b>TRAILER</b>																		H-13								G-13														
Conti EcoPlus HT3																																								
Conti HTL 3																		G-13								G-13														
HTL1																																								
Conti Hybrid HT3																		G/H-16	H-16					G-16					H-16	G/H-16										
<b>19.5"</b>																																								
Conti HSR 5																																								
Conti Hybrid HS3																																								
Conti HDR 5																		G/H-16							G-17	H-18														
Conti Hybrid HD3																																								
Conti Scandinavia HD3																		G-19	H-21																					
Conti Hybrid HT3																																								
Conti Terra HD3																		G-19	H-19																					
<b>16" &amp; 17.5"</b>																																								
HTL2 Eco Plus (17.5")																																								
HTR2 (17.5")																																								
LSR1 (17.5")																																								
Conti LAR 3 (16")	E-14	E-14	E-14	E-14																																				

All tires are tubeless except where noted.

# Truck Tire Comparison Chart



































		MICHELIN	BRIDGESTONE	GOODYEAR
STEER/ALL-POSITION	Conti EcoPlus HS3+	X Line Energy Z, X Line Energy Z+	R213 Ecopia, R283 Ecopia	Endurance LHS
	Conti EcoPlus HS3 (295/60R22.5)	X Line Energy Z	-	-
	Conti Coach HA3	X Line Energy Z Coach	-	G670 RV MRT
	Conti HSL 3	X Multi Energy Z2	R283S Ecopia	Fuel Max RSA
	Conti HSR 3	XZE2	R250ED	Endurance RSA
	HSR2	XZE2	R250ED	Endurance RSA
	HSR2 SA	XZE2+, X Multiway XZE	R250 ED	G670 RV MRT
	HTR2	XFE	R244	G296 MSA
	Conti Urban HA3	X InCity Z	-	-
	Conti HAU 5	X InCity Z SL	-	-
	Conti HAU 3 WT	XZUS2	M870	Endurance WHA
	Conti HSC 3	X Works Z	M853	G751 MSA
	Conti HAC 3	XZY3	M864	G296 MSA
	HCS	XZL, XZL+	L315	G278 MSD
DRIVE POSITION	Conti HDL 3 EP	X Line Energy D+, D	M713 Ecopia	Fuel Max LHD 2
	HDL2 Eco Plus	X-One Line Energy D	Greatec M835A Ecopia	Fuel Max SSD
	HDL2+ Eco Plus (295/60R22.5)	X Multi D 295	M749	-
	HDL2 DL+	XDA5+	M726 ELA	-
	HDL2 DL Eco Plus	-	-	Endurance LHD
	Conti HDL 3 LTL	X Multi Energy D	M760 Ecopia	G572 1AD Fuel Max
	HDR2+	X Multi D	M770	G182 RSD
	HDR	X Multi D	M726	Fuel Max RTD
	HDW2	XDN2	M771/M770	G182 RSD
	Conti Scandinavia HD3	XDS2	M729/M704	UltraGrip RTD
	Conti HDC 3	X Works D	L320	Armor Max Pro Grade MSD
HDC1 HT	X Works Grip D	M775	Armor Max ESD	
TRAILER	Conti EcoPlus HT3	X Line Energy T/T2	R123 Ecopia	Fuel Max LHT
	Conti HTL 3	X Line Energy T/T2	-	G316 LHT
	HTL1	X One Line Energy T2	Greatec R197 Ecopia	Fuel Max SST
	Conti Hybrid HT3	XTE	R196A, R250F	Endurance RST
19.5"	Conti HSR 5	Agilis HD Z	R238	Fuel Max RSA ULT
	Conti Hybrid HS3	Agilis HD Z	R238	Fuel Max RSA ULT
	Conti HDR 5	XDS 2	M729F	Fuel Max RTD ULT
	Conti Hybrid HD3	XDS 2	M729F	Fuel Max RTD ULT
	Conti Scandinavia HD3	XDS 2	M704	-
	Conti Hybrid HT3	X Line Energy T	-	-
	Conti Terra HD3	-	-	-
17.5"	HTL2 Eco Plus	XTA2 Energy	R238	KMax T
	HTR2	X Multi T	R238	-
	LSR1	XZA	-	G114 LHT
16"	Conti LAR 3	XPS RIB	Duravis R238	Endurance RSA ULT

# Application Guide

	 <b>LONG HAUL</b> Our most fuel-efficient tires, designed for highway traffic over long distances with even wear. <ul style="list-style-type: none"> <li>• Lowest fuel consumption.</li> <li>• Maximum mileage performance.</li> <li>• Comfortable ride.</li> </ul>	 /  <b>REGIONAL</b> Flexible tires offering good fuel efficiency on the highway, with excellent durability for off-highway driving. <ul style="list-style-type: none"> <li>• Excellent wear resistance.</li> <li>• Optimal traction on diverse roads.</li> <li>• All-weather suitability.</li> </ul>	 /  <b>URBAN</b> Reinforced, durable tires that tackle the challenges of city traffic with ease. <ul style="list-style-type: none"> <li>• High resistance to curb damage.</li> <li>• Very high mileage.</li> <li>• Handles rapid changes of city traffic.</li> </ul>	 <b>CONSTRUCTION</b> Take on the tough terrain of job sites and varied road conditions with these durable, high traction tires. <ul style="list-style-type: none"> <li>• High mileage on the road.</li> <li>• Maximum equipment up-times.</li> <li>• Resists damage off the road.</li> </ul>	 <b>OFF-ROAD</b> Our most durable, highest traction tires that perform their best in extreme locations. <ul style="list-style-type: none"> <li>• Maximum durability for toughest conditions.</li> <li>• Great traction on the harshest terrain.</li> <li>• High carrying capacity for heavy loads.</li> </ul>
<b>STEER/ALL-POSITION</b>	Conti EcoPlus HS3+		Conti Urban HA3		
	Conti EcoPlus HS3			Conti HAU 3 WT	HCS
	Conti Coach HA3				Conti HSC 3
			HSR2 SA		Conti HAC 3
			Conti LAR 3 (16")		
		HTR2	Conti HAU 5		
		Conti HSR 5 (19.5")			
		Conti HSL 3			
		Conti Hybrid HS3 (19.5")			
		LSR1 (17.5")			
<b>DRIVE POSITION</b>	Conti HDL 3 EP	HDR2+		Conti HDC 3	
		Conti Scandinavia HD3			
	HDL2 Eco Plus				Conti Terra HD3 (19.5")
	HDL2 DL Eco Plus	HDW2			HDC1 HT
	Conti HDL 3 LTL	HDR			
		Conti HDR 5 (19.5")			
		HDL2 DL+			
		Conti Hybrid HD3			
		HDL2+ Eco Plus			
		Conti Hybrid HD3 (19.5")			
<b>TRAILER POSITION</b>	Conti EcoPlus HT3		HTR2 (17.5")		
	Conti HTL 3				
	HTL1				
		HTL2 Eco Plus (17.5")			
		Conti Hybrid HT3			
		Conti Hybrid HT3 (19.5")			

Tires in the Steering axle position are also suitable for trailing axles on trucks and as all-position fitment where traction is not of paramount importance.

# Products by Vocation

SEGMENT / VOCATION		STEER/ALL-POSITION	DRIVE POSITION	TRAILER POSITION	
GOODS	Car Carriers		Conti EcoPlus HS3	HDL2+ Eco Plus, Hybrid HD3 (19.5')	Conti Hybrid HT3, HSR2 SA
	General Freight (Long Haul)		Conti EcoPlus HS3+	Conti HDL 3 EP, Conti HDL 3 LTL, HDL2 DL+, HDL2 DL Eco Plus, HDL2 Eco Plus	Conti EcoPlus HT3, Conti HTL 3, HTL1
	General Freight (Regional Haul)		HSR2, Conti HSR 3, Conti HSL 3	Conti HDL 3 LTL, HDR2+, HDR2 Eco Plus, HDL2 DL+, Scandinavia HD3, HDW2, Conti HSR 5 (19.5'), Conti HDR 5 (19.5')	Conti Hybrid HT3, Conti EcoPlus HT3, Conti HTL 3
	Local Pickup & Delivery Vehicles		Conti HSR 5 (19.5'), Conti LAR 3 (16'), HSR2, Conti HSR 3	Conti HSR 5 (19.5'), Conti HDR 5 (19.5'), HDR2+, HDL2 DL+	Conti Hybrid HT3, Conti EcoPlus HT3, Conti HTL 3
	Lease & Rental Vehicles	 	Conti EcoPlus HS3+, Conti HSL 3, HSR2, Conti HSR 3	Conti HDL 3 EP, HDL2 DL+, HDL2 Eco Plus, HDR2+, HDW2, Scandinavia HD3	Conti Hybrid HT3, Conti EcoPlus HT3, Conti HTL 3, HTL1
	Refrigerated Trucks	 	Conti EcoPlus HS3+, Conti HSL 3, HSR2, Conti HSR 3	Conti HDL 3 EP, HDL2 DL+, HDL2 DL Eco Plus, HDL2 Eco Plus, HDW2, Scandinavia HD3	Conti EcoPlus HT3, Conti HTL 3, Conti Hybrid HT3
	Beverage Haulers		HSR2, Conti HSR 3, Conti HSL 3, HTR2	HDR2+, HDL2 DL+, HDW2, Scandinavia HD3	Conti Hybrid HT3, HTL2 Eco Plus (17.5'), HTR2 (17.5')
	Household Movers	 	Conti EcoPlus HS3+, Conti HSL 3, HSR2, Conti HSR 3	Conti HDL 3 EP, HDL2 DL+, HDL2 DL Eco Plus, HDR2+, HDR, HDW2, Scandinavia HD3	Conti EcoPlus HT3, Conti Hybrid HT3, HTL2 Eco Plus (17.5'), HTR2 (17.5')
	Tankers / Liquid Bulk Haulers		Conti EcoPlus HS3+, Conti HSL 3, Conti HSR 3, HSR2	Conti HDL 3 EP, HDL2 Eco Plus, HDL2 DL+, HDR2+, HDW2	HSR2, Conti HSR 3, Conti EcoPlus HT3, HTL1, Conti Hybrid HT3
	Hazardous Material Haulers		Conti EcoPlus HS3+, Conti HSL 3, Conti HSR 3, HSR2	Conti HDL 3 EP, HDL2 Eco Plus, HDL2 DL+	HSR2, Conti HSR 3, Conti EcoPlus HT3, HTL1, Conti Hybrid HT3
PEOPLE	Motor Coaches	 	Conti Coach HA3, HSR2 SA	Conti Coach HA3, HSR2 SA	-
	School Buses	 	HSR2, Conti HSR 3	HDR2+, HDW2	-
	City Buses	 	Conti Urban HA3, Conti HAU 5	Conti Urban HA3, Conti HAU 5	-
	RVs	 	Conti Coach HA3, HSR2 SA, Conti HSL 3	-	-
CONSTRUCTION	Construction Material Transport Vehicles	 	HSR2, Conti HSR 3, Conti HSC 3, Conti HAC 3, HTR2	HDR2, Conti HDC 3, Conti HSC 3	HSR2, Conti HSR 3, Conti HSC 3
	Utility Vehicles	 	HSR2, Conti HSR 3, Conti HSC 3, Conti HSL 3,	Conti HDR 5 (19.5'), HDR2+, Conti HAC 3, HTR2	HTR2, HSR2, Conti HSR 3, Hybrid HT3
	Emergency Vehicles	 	HTR2, Conti HSC 3, HSC1, HSR2, Conti HSR 3, HSR+, Conti HSL 3, HSR2 SA, HAU 3 WT, Conti HSR 5 (19.5')	HDR2+, HDW2, Scandinavia HD3, Conti HDR 5 (19.5')	-
	Waste & Sanitation Vehicles	 	Conti HAU 3 WT, Conti HSC 3	Conti HAU 3 WT, Conti HDC 3, HDR2+	-
	Agriculture, Feed & Livestock Transport Vehicles		HSR2, Conti HSR 3, Conti HSC 3	HDR2, Conti HDC 3, Conti HSC 3	HSR2, Conti HSR 3, Conti HSC 3
	Forestry & Lumber Vehicles		Conti HSC 3, HSR2, Conti HSR 3	HDC1 HT	Conti HSC 3, HSR2, Conti HSR 3
	Mining / Quarry Vehicles		HCS, Conti HSC 3, Conti HAC 3	Conti HDC 3, HDC1 HT, HCS, Conti Terra HD3 (19.5')	Conti HAC 3, Conti HSC 3, HSR2, Conti HSR 3
	Heavy Haul & Special Load Transport Vehicles		Conti HSL 3, Conti EcoPlus HS3+, HSR2, Conti HSR 3	Conti HDL 3 EP, HDL2 DL+, HDR2+	Conti EcoPlus HT3, Hybrid HT3, HTL2 EcoPlus (17.5'), HTR2 (17.5')
	Cement Vehicles		Conti HAC 3, HTR2, Conti HSC 3, HCS	Conti HSC 3, Conti HDC 3, HDC1 HT, HDR2+	Conti HSC 3

## Application Key:

				
LONG HAUL	REGIONAL	URBAN	CONSTRUCTION	OFF-ROAD

**PLEASE NOTE:** The tires depicted in this chart are suggested as the primary products for each segment and are subject to change depending on application. Not every product in the Continental portfolio is represented. For more information, please visit [www.continental-truck.com](http://www.continental-truck.com) or contact your local sales representative for the most up to date information.

# Steer / All-Position

## New Tire Product Overview



**Conti EcoPlus HS3+**  
3G   
Page 23



**Conti Coach HA3**  
   
Page 24



**Conti HSL 3**  
3G   
Page 25



**Conti HSR 3**  
3G   
Page 45



**HSR2**  
   
Page 46



**HSR2 SA**  
   
Page 47



**HTR2**  
   
Page 48



**Conti HAU 5**  
  
Page 70



**Conti Urban HA3**  
Page 71



**Conti HAU 3 WT**  
  
Page 72

### 17.5" Tire

### 16" Tire



**Conti HSC 3**  
3G   
Page 77



**Conti HAC 3**  
  
Page 78



**HCS**  
  
Page 88



**LSR1 (17.5")**  
  
Page 55



**Conti LAR 3 (16")**  
Page 54

Legend:

3G 3G Casing	SmartWay® Verified	Intelligent Tire	Retread Available	EV Approved	Other Sizes Available
-----------------	--------------------	------------------	-------------------	-------------	-----------------------



# Drive Position

## New Tire Product Overview



**Conti HDL 3 LTL**  
 3G   
 Page 26



**Conti HDL 3 EP**  
  
 Page 27



**HDL2 Eco Plus**  
  
 Page 28



**HDL2+ Eco Plus**  
  
 Page 29



**HDL2 DL+**  
 3G   
 Page 30



**HDL2 DL Eco Plus**  
 3G   
 Page 31



**HDR2+**  
 3G   
 Page 49



**HDW2**  
 3G   
 Page 50



**Conti Scandinavia HD3**  
 3G   
 Page 51



**HDR**  
  
 Page 52



**Conti HDC 3**  
 3G   
 Page 79



**HDC1 HT**  
 3G   
 Page 80

Legend:

<b>3G</b> 3G Casing	SmartWay® Verified	Intelligent Tire	Retread Available	EV Approved	Other Sizes Available
------------------------	--------------------	------------------	-------------------	-------------	-----------------------

# Trailer Position

## New Tire Product Overview



Conti HTL 3  
3G   
Page 32



Conti EcoPlus HT3  
3G   
Page 33



HTL1  
   
Page 34



Conti Hybrid HT3  
   
Page 53

### 17.5" Tires



HTL2 Eco Plus (17.5")  
Page 35



HTR2 (17.5")  
  
Page 56

Legend:

3G Casing	SmartWay® Verified	Intelligent Tire	Retread Available	EV Compatible	Other Sizes Available
-----------	--------------------	------------------	-------------------	---------------	-----------------------

# 19.5" Tires

## New Tire Product Overview



**Conti HSR 5**

   
 Page 57



**Conti Hybrid HS3**

Page 58



**Conti HDR 5**

   
 Page 59



**Conti Hybrid HD3**

Page 60



**Conti Scandinavia HD3**

   
 Page 61



**Conti Hybrid HT3**

   
 Page 62



**Conti Terra HD3**

Page 89

Legend:

 3G Casing	 SmartWay® Verified	 Intelligent Tire	 Retread Available	 EV Compatible	 Other Sizes Available
--	---	---	--	--	--

# Digital Tire Monitoring Solutions

## Increasing Uptime, Decreasing Costs

### Why invest in tire pressure & temperature monitoring?



#### Extend Tire Life

Tires underinflated by as little as 10% can cause tires to lose up to 15% of their tread life.

SOURCE: THE TECHNOLOGY & MAINTENANCE COUNCIL (TMC) TIRE & WHEEL STUDY GROUP



#### Save Labor and Tire Maintenance Costs

Did you know 85% of tire failures start as a slow leak? Reduce time spent on manual tire pressure checks and repairing tire issues.

SOURCE: FEDERAL MOTOR CARRIER SAFETY ADMINISTRATION (FMCSA)



#### Reduce Roadside Breakdowns

Half of all roadside breakdowns occur due to tire issues. TPMS helps ensure driver safety and minimize costs.

SOURCE: FEDERAL MOTOR CARRIER SAFETY ADMINISTRATION (FMCSA)



#### Improve Safety

Even in ideal conditions, trucks require twice as much stopping distance as a standard passenger car.

SOURCE: FEDERAL MOTOR CARRIER SAFETY ADMINISTRATION (FMCSA)

**Properly inflated tires can reduce total tire related costs an average of \$1,000 annually per vehicle.**

Actual results may vary. According to the Technology & Maintenance Council (TMC) S.2 Tire & Wheel Study Group, improper tire inflation, defined as little as 10 psi low, reduces fuel economy by about one percent, increases total tire-related costs by approximately \$1,000 annually per tractor-trailer combination, and changes the tire contact patch which affects stopping and acceleration traction and vehicle handling thereby impacting vehicle safety.



## ContiConnect Pro

- Alerts back-office personnel in real-time to tire issues on the road.
- Provides actionable insights towards extended tire life, reduced roadside breakdowns and improved fuel consumption.
- The web portal, mobile app, text alerts, and email reports give you around-the-clock access to valuable tire data.
- Access to customizable dashboards and reporting.
- Compatible with ZONAR.
- Compatible with Yard Reader or LIVE Solution, and accessible via Web Portal and ContiConnect mobile app.



## ContiConnect Lite

- Precise tire pressure and tire casing temperature readings.
- In-app push notifications and alerts.
- Available only via ContiConnect mobile app.



## LIVE: Truck + Trailer

- Digital tire monitoring available anytime, anywhere.
- Real-time tire alerts via text and/or email for both slow and fast tire leaks.



## LIVE: Trailer

- Daily tire monitoring alerts even when not connected to a power unit.
- GPS location whether the trailer is on the road or awaiting pickup.



## ContiConnect Yard

- Real-time tire alerts when vehicle is within range of the ContiConnect Yard Reader.
- Digital tire monitoring for the entire fleet with just one Yard Reader station.



## ContiConnect Pressure Check

- Informs the driver in real-time via a convenient in-cab display.



## Tire Mounted Sensor

- Precise tire pressure, casing temperature, and tire mileage measurements and alerts.
- Battery life status display to maximize usable life.
- Individual tire mileage measurements for evaluating tire cost per mile.
- Recommended sensor for long-term use.
- Available to be pre-installed in Continental and General tires.



## Valve Cap Sensor

- Accurate tire pressure and air temperature measurements and alerts.
- Easy conversion to tire-mounted sensors when replacing tires.
- Quick and easy installation for the entire fleet.



# Conti Tread

## Retread Availability Chart

TREAD (MM)	160	170	180	185	188	190	195	200	205	210	215	220	225	230	235	240	
ALL-POSITION	HSR 5 (19.5")							16/32"		16/32"							
	HSR 3									20/32"		20/32"		20/32"		20/32"	
	HSR						18/32"				18/32"		18/32"		18/32"		
	LSR1					15/32"	15/32"										
	HAU 3 WT									26/32"		26/32"		26/32"		26/32"	
	HSC 3									24/32"		24/32"		24/32"		24/32"	
	HSC										18/32"		18/32"		18/32"		
	HCS										32/32"		32/32"		32/32"		
DRIVE POSITION	HDL 3 LTL-R									22/32"		22/32"		22/32"		22/32"	
	HDL2 DL										28/32"		28/32"		28/32"		
	HDL - 13/32"										13/32"		13/32"		13/32"		
	HDL - 20/32"										20/32"		20/32"		20/32"		
	HDL - 26/32"										26/32"		26/32"		26/32"		
	HDL Eco Plus - 20/32"										20/32"		20/32"		20/32"		
	HDL Eco Plus - 26/32"										26/32"		26/32"		26/32"		
	HDL2 Eco Plus																
	HDR 5 (19.5")								22/32"		22/32"		22/32"				
	HDR2 - 22/32"					22/32"		22/32"									
	HDR2 - 26/32"										26/32"		26/32"		26/32"		
	HDR1 - 16/32"			16/32"			16/32"	16/32"									
	HDR1 - 20/32"						20/32"	20/32"									
	HDR1 - 22/32"									22/32"	22/32"		22/32"		22/32"		22/32"
	HDR1 - 26/32"										26/32"		26/32"		26/32"		26/32"
	Scandinavia HD3										25/32"		25/32"		25/32"		25/32"
	HDW2											27/32"		27/32"		27/32"	
	HDU 3 WT										32/32"		32/32"		32/32"		32/32"
HDC 3										28/32"		28/32"		28/32"		28/32"	
HDC1 HT												32/32"		32/32"			
TRAILER POSITION	HT							11/32"		11/32"		11/32"		11/32"		11/32"	
	HTL							13/32"		13/32"		13/32"		13/32"		13/32"	
	HTL1																
	Hybrid HT3							16/32"		16/32"		16/32"		16/32"			
	HTR2 SA																
	HTR2																
HTC1																	

# Conti Tread

## Retread Availability Chart

TREAD (MM)		245	250	255	260	270	280	290	320	340	350	360	370	380	390	400	410	
ALL-POSITION	HSR 5 (19.5")																	
	HSR 3																	
	HSR				18/32"													
	LSR1																	
	HAU 3 WT		26/32"		26/32"	26/32"	26/32"											
	HSC 3																	
	HSC																	
	HCS	32/32"											32/32"		32/32"			
DRIVE POSITION	HDL 3 LTL-R																	
	HDL2 DL	28/32"																
	HDL - 13/32"																	
	HDL - 20/32"																	
	HDL - 26/32"																	
	HDL Eco Plus - 20/32"	20/32"																
	HDL Eco Plus - 26/32"	26/32"																
	HDL2 Eco Plus															24/32"		
	HDR 5 (19.5")																	
	HDR2 - 22/32"																	
	HDR2 - 26/32"	26/32"																
	HDR1 - 16/32"																	
	HDR1 - 20/32"																	
	HDR1 - 22/32"																	
	HDR1 - 26/32"	26/32"																
	Scandinavia HD3																	
	HDW2	27/32"																
	HDU 3 WT		32/32"		32/32"	32/32"												
HDC 3		28/32"																
HDC1 HT																		
TRAILER POSITION	HT																	
	HTL																	
	HTL1															13/32"		
	Hybrid HT3																	
	HTR2 SA		16/32"		16/32"	16/32"												
	HTR2								22/32"	22/32"	22/32"							
	HTC1									24/32"		24/32"			23/32"			

# Conti Tread

## Retread Comparison Chart

	Conti Tread	BANDAG	MICHELIN	GOODYEAR
ALL-POSITION	HSR 5 - 19.5"	UAP2	XZA	G661
	HSR 3	UAP2, BDV	XZE2	G661 HSA
	HSR	Ultra All Position	XZE	All Position 18, G661 HSA
	LSR1	FCR Rib	XZA	G159
	HAU 3 WT	BRM, BRM3	XZUS	Endurance WHA, G686 G289 WHA
	HSC 3	BRM, BRX2	XZY3	G287 MSA
	HSC	BRX	XZY	G186 MSA
	HCS	BDY2	XZL, XZH	G177 Modified
DRIVE POSITION	HDL 3 LTL-R	B713, B760	X Multi Energy D	-
	HDL2 DL	MegaTrek	XDA HT	G328
	HDL - 26	Ultra Drive	XDHT	G362
	HDL - 20	FCR Drive, DR 5.3	XDHT	G362
	HDL - 13	BTT2	XDC LL	G362
	HDL Eco Plus - 26	B710 Fuel Tech	X Line Energy D	G572 LHD Fuel Max
	HDL Eco Plus - 20	FCR Drive	XDA 2 AT	Fuel Max LHD G505D
	HDL2 Eco Plus	B835 FuelTech	X One Line Energy D	G392 SSD Fuel Max
	HDR 5 - 19.5"	BDR-AS	XDE M/S, XDC	G622
	HDR2 - 22	BDR-AS	MD XDN2	G167
	HDR2 - 26	Ultra Drive, BDR-HT3	X Multi D, XD4, XDN2	G182
	HDR1 - 16	BDLT	XDE M/S	G622 LT
	HDR1 - 20	BDL	XDE M/S	RDA
	HDR1 - 22	BDR-AS	XDE M/S, XDC	G622
	HDR1 - 26	Ultra Drive	XDN2	G338
	HDR1 Eco Plus	BDR-AS	-	G622
	Scandinavia HD3	-	XDS2	Endurance WTD, WInterTrac 2
	HDW2	BDR-W	XDS2	G622 RSD
	HDU 3 WT	BDM3	XDUS	Endurance WHD, G292 WHD
	HDC 3	BDY2, BDY1	XDY, XDY-1	G677 MSD
HDC1 HT	BDY2	XDY-EX	G741 MSD	
TRAILER POSITION	HT	B123, B197 FuelTech, FCR T2	X Line Energy T	Fuel Max LHT
	HTL	BTL, TR 4.1	XTA-1	G314, G159, LCT 11
	HTL1	B135 FuelTech	X One Line Energy T & T2	G394 SST Fuel Max
	Hybrid HT3	B123, B197 Fuel Tech, FCR T2	X Multi T SA, XTY SA	G619 RST
	HTR2 SA	BTL-SA, ECL ST	XTE2 Widebase, XTA	G619 RST
	HTR2	-	XZH, XZA Wide Base	G296 MSA
	HTC1	BRM-WB	XZL, XZY3 and XZY Widebase	G296 MSA



## Continental Retread Solutions

# ContiLifeCycle Retread Stages

### Technology Driven for High-Quality Retreading



## Technology Driven for High-Quality Retreading.

To learn more, contact your Continental representative today!

# Conti Tread

## Product Overview

### All-Position



Conti HSR 5 (19.5")




Page 64



HSR 3




Page 64



HSR


Page 64



LSR1



Page 65



HAU 3 WT




Page 73



HSC 3




Page 82



HSC

Page 82



HCS



Page 90

### Drive Position



HDL 3 LTL-R



Page 38



HDL2 DL



Page 38



HDL

Page 38



HDL Eco Plus



Page 39



HDL2 Eco Plus



Page 39



Conti HDR 5 (19.5")



Page 65



HDR2



Page 65



HDR1

Page 66

Legend:



SmartWay® Verified



New Tire Available

# Conti Tread

## Product Overview

### Drive Position (Continued)



**Scandinavia HD3**

  
 Page 66



**HDW2**

  
 Page 66




**HDU 3 WT**

Page 73



**HDC 3**

  
 Page 82



**HDC1 HT**

  
 Page 83

### Trailer Position




**HT**

  
 Page 39



**HTL**

Page 40



**HTL1**

   
 Page 40



**Hybrid HT3**

  
 Page 67



**HTR2**

  
 Page 67



**HTR2 SA**



Page 67



**HTC1**

Page 83

Legend:

	
SmartWay® Verified	New Tire Available

# ContiLink

## Your Connection to Dealer Support & Resources

### Standard Claims Processing

You can now start/access your warranty claims online. If you can name it, you can claim it... pricing, shipping, sales tax, advertising and waste fee claims are just a few of the things you can process through ContiLink.

### Order Management

Whether you need to check product availability, place an order, track shipping or monitor backorder reports, ContiLink has your needs covered.

### Financial

**NEW FEATURES**

Through ContiLink's Financial feature you can now make payments, view real-time debits/credits on open items, and email or save copies of invoices, statements and credit memos.

### Marketing Needs

As a Continental dealer, you can purchase sales literature and point-of-sale material for your showroom anytime, or download digital copies in PDF format. Simply log into ContiLink and click on the Marketing Suite banner.

### National Accounts & Government Claims

**NEW FEATURES**

There is a new National Account Platform on ContiLink. You will find improvements on the dashboard, enhanced delivery receipt capabilities, API monitoring, notification management, invoice pre-approval and improved D9 submission form.

### Emergency Road Service Tracking

With detailed reporting from Continental's TrukFix emergency road service program, you can see at a glance your acceptance rates for calls and opportunities to increase service revenue with Continental.

### ContiACADEMY

Gain access to ContiAcademy, our virtual training platform to learn about Continental products, solutions, and live training opportunities.

**Log on to [www.ContiLink.com](http://www.ContiLink.com) Today!**



### Administration

ContiLink gives Dealers the flexibility to update their profiles. Keep your dealer location information up to date, and edit users and user information as needed.



### Digital Downloads

Need instant access to Continental resources? Visit the Marketing section of the ContiLink site and download digital copies of the literature you need, including your Dealer Marketing Program book.



### Live Chat

Chat with a Truck Tires Inside Sales representative or a National Account specialist to check your orders or if you have a question about a delivery receipt. Get the information you need when you need it.

# 3Gasing

## A Next-Generation Solution for Easier Casing Management and Maximum Retreadability

### Increased Belt Cord Angles

Belt features increased stiffness and improved penetration resistance. Innovative belt package designed to reduce heat and increase durability.



### Technologically Advanced Bead Core

Core designed for structural durability and extended product life. Core is made from a tear-resistant compound at steel cord edges.

### Increased Tread Volumes

Wider tread platform allows the casing to better support the tire's given load range. Tread features a wide cavity, with a standard retread width to provide a single platform for greater ease of retreading of 240-245mm treads.

### Heat Dissipating Polymers

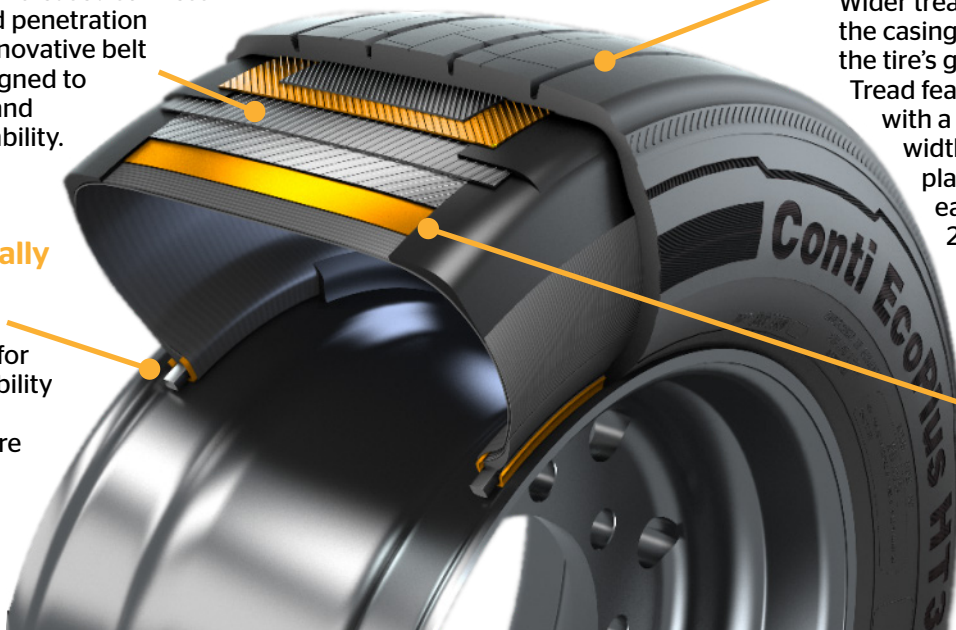

Fuel Savings



Increased Mileage



Improved Retreadability



Standardized Casing

These Continental Tires are Built on the Innovative 3G Casing:



Conti EcoPlus HS3+



Conti HSL 3



Conti HSR 3



Conti HSC 3



Conti HDL 3 LTL



Conti HDL 3 EP



HDL2 DL+



HDL2 DL Eco Plus



HDR2+



HDW2



Conti Scandinavia HD3



Conti HDC 3



HDC1 HT



Conti EcoPlus HT3



Conti HTL 3

3Gasing



High Removal Mileage // Low Rolling Resistance // Even Wear // Optimal Retreadability

# Long Haul

## For Long-Distance Highway Driving

LONG HAUL

**Engineered for your application.** Tires for Long Haul use are designed for straight line, on-highway driving, distributing freight from state to state across great distances. Tires are optimized for high removal miles and fuel efficiency.

**IMPORTANT NOTE:** Tire products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.

# Long Haul

## New Tire Product Overview



Conti EcoPlus HS3+  
3G



Conti Coach HA3



Conti HSL 3  
3G



Conti HDL 3 LTL  
3G



Conti HDL 3 EP  
3G



HDL2 Eco Plus



HDL2+ Eco Plus



HDL2 DL+  
3G



HDL2 DL Eco Plus  
3G



Conti HTL 3  
3G

### 17.5" Tires



Conti EcoPlus HT3  
3G




HTL1



HTL2 Eco Plus (17.5")

Legend:

3G 3G Casing	SmartWay® Verified	Intelligent Tire	Retread Available	EV Compatible	Other Sizes Available
-----------------	--------------------	------------------	-------------------	---------------	-----------------------



# Conti EcoPlus HS3+

## Fuel-Efficient Steer

✓ GOODS ● PEOPLE ● CONSTRUCTION

Conti EcoPlus HS3+ has a **27% improvement in removal mileage with even wear** over its predecessor, Conti EcoPlus HS3.

**10% improvement in decoupler durability**, an essential benefit for products in the steer/all-position category to extend tire life.

**Technologically advanced cap/base compounds** provide improved cut and tear resistance for increased mileage.

**Tread profile** reduces sensitivity to road surface, fleet and vehicle variations allowing for improved performance throughout tire life.

**Improved footprint shape** delivers significant wear improvements for increased removal miles.

Built on the innovative **Continental 3G Casing** for maximum retreadability.




### Key Features



3G Casing



SmartWay® Verified



\*TREAD B: Conti EcoPlus HS3

### Compares to

Michelin: X Line Energy Z, X Line Energy Z+ | Bridgestone: R213 Ecopia, R283 Ecopia | Goodyear: Endurance LHS


Product Data – Conti EcoPlus HS3+																					
Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
11R22.5	G	05126130000 05653300000	19	75	19.5	495	41.8	1062	11.7	296	13.1	331	8.25, 7.50	12.5	318	495	308	119	54	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05126140000 05653310000	19	75	19.5	495	41.8	1062	11.7	296	13.1	331	8.25, 7.50	12.5	318	495	308	121	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/60R22.5 Tread B	J	05112580000 05655370000	15	75	17.1	434	37.0	940	11.5	292	12.0	304	9.00, 9.75	12.9	329	574	356	110	50	7390, 130 (3350, 900)	6780, 130 (3075, 900)
295/75R22.5	G	05126150000 05653320000	19	75	18.7	475	39.9	1013	11.4	290	12.3	312	8.25, 9.00	12.5	318	519	322	114	52	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05126160000 05653330000	19	75	18.7	475	39.9	1013	11.4	290	12.3	312	8.25, 9.00	12.5	318	519	322	117	53	7160, 123 (3250, 850)	6610, 123 (3000, 850)
11R24.5	H	05126170000 05653340000	19	75	20.4	518	43.8	1113	11.7	297	13.1	333	8.25, 7.250	12.5	318	473	294	130	59	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05126180000 05653350000	19	75	19.3	490	41.5	1054	11.4	289	12.9	328	8.25	12.5	318	499	310	122	55	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE    ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.





# Conti Coach HA3

## Fuel-Efficient, All-Position Coach

● GOODS ● PEOPLE ● CONSTRUCTION

**Extra load-carrying capacity** with a specially reinforced stable bead technology.

Durable casing for **premium retreadability**.

**Noise-reducing tread design** for serene and comfortable travel.

**Interlocking 3D sipes** provide all-weather traction.

### Continental's Intelligent Tire.

- Equipped with TPMS sensor for accurate, realtime tire pressure and temperature readings.
- Sensor warranted for 5 years to minimize disruptions.
- Sensor provides true casing temperature allowing preventive actions that make your tire last longer.
- Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at [www.continental-truck.com](http://www.continental-truck.com). See warranty policy for details.



### Key Features



Intelligent Tire



SmartWay® Verified

### Compares to

Michelin: X Line Energy Z Coach

## Product Data – Conti Coach HA3


Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, kPa)		LBS, PSI (KG, kPa)														
315/80R22.5	L	05651710000	17	75	19.7	501	42.4	1077	12.4	315	13.6	345	9.00, 8.25*	13.8	351	488	303	148	67	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

\*315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi in dual usage, and 8000 lbs at 120 PSI in single usage.

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti HSL 3

## Fuel-Efficient, Super Regional Steer

✓ GOODS ● PEOPLE ● CONSTRUCTION

Increased stiffness in the **belt package** promotes smooth, even tread wear.

**Advanced tread compounding** delivers long removal mileage and low rolling resistance.

**Fuel-efficiency** and application flexibility with unique fuel saving edge technology.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features



3G Casing



SmartWay® Verified

### Compares to

Michelin: X Multi Energy Z2 | Bridgestone: R283S Ecopia  
Goodyear: Fuel Max RSA


### Product Data – Conti HSL 3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
11R22.5	H	05111570000 05652660000	20	75	19.5	495	41.6	1056	11.7	297	13.1	331	8.25, 7.50	12.5	318	498	309	120	54	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05111580000 05652670000	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 9.00	12.5	318	517	321	111	50	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05111590000 05652680000	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 9.00	12.5	318	517	321	114	52	7160, 123 (3250, 850)	6610, 123 (3000, 850)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti HDL 3 LTL

## Fuel-Efficient, Single Axle Drive

✔ GOODS ● PEOPLE ● CONSTRUCTION

3-D matrix sipes provide **superior traction and even wear**.  
**Maximum stone ejection** due to superior groove geometry.  
**Maximum fuel-efficiency and high removal miles** from advanced tread compounding.

**Resists irregular wear caused from high-torque single drive position**, including heel-toe wear, thanks to rigid tread blocks that effectively control movement.

Built on the innovative **Continental 3G Casing** for maximum retreadability.

**3 Peak Mountain Snowflake (3PMSF)** and **Mud & Snow (M+S)** designation for superior performance in **all weather conditions**.



### Key Features



3G Casing



SmartWay® Verified



Retread Available



3PMSF Designation



Mud + Snow Designation

### Compares to


Michelin: X Multi Energy D | Bridgestone: M760 Ecopia | Goodyear: Fuel Max 1AD

Product Data – Conti HDL 3 LTL																							
Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	
																							Single
11R22.5	G	05211540000 05653260000	24	75	19.7	500	41.1	1061	11.6	294	12.6	320	8.25, 7.50	12.5	318	495	308	128	58	6175, 105 (2800, 720)	5840, 105 (2650, 720)		
295/75R22.5	G	05211550000 05653210000	24	75	19.4	491	40.4	1025	11.7	297	12.7	322	8.25, 9.00	12.5	318	513	319	119	54	6175, 110 (2800, 760)	5675, 110 (2575, 760)		
295/75R22.5	H	05212180000 05654350000	24	75	19.4	491	40.4	1025	11.7	297	12.7	322	8.25, 9.00	12.5	318	512	319	124	54	6610, 120 (3000, 760)	6005, 120 (2725, 760)		
11R24.5	H	05211560000 05653270000	24	75	20.6	524	43.8	1112	11.6	295	12.7	322	8.25, 7.50	12.5	318	473	294	139	63	7160, 120 (3250, 830)	6610, 120 (2725, 830)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE    ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti HDL 3 EP

## Fuel-Efficient, Mileage-Balanced Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION

Advanced tread compound with high-structure carbon black and silica technology provides **balanced rolling resistance and wear performance.**

Utilizing a polymer matrix bound silica compound, this design achieves up to a **10% improvement in rolling resistance** compared to the HDL2+.

**Even wear** due to optimized tire footprint.

Innovative groove geometry, achieved with a specialized compound, minimizes stone retention and offers up to a **15% improvement in chip and cut resistance** compared to the HDL2+.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features



3G Casing



SmartWay® Verified

### Compares to

Michelin: X Energy D | Bridgestone: M713 Ecopia | Goodyear: Fuel Max LHD 2


## Product Data - Conti HDL 3 EP

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, kPa)		LBS, PSI (KG, kPa)														
295/75R22.5	G	05212370000 05655670000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 9.00	12.5	318	511	318	123	56	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05212420000 05655730000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 9.00	12.5	318	511	318	126	57	6610, 120 (3000, 830)	6005, 120 (2725, 825)
11R22.5	G	05212380000 05655680000	26	75	19.6	499	42	1066	11.7	296	13.1	331	8.25, 7.50	12.5	318	493	306	129	58	6175, 105 (2800, 720)	5840, 105 (2650, 720)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HDL2 Eco Plus

## Fuel-Efficient, Super Single Drive


✓ GOODS ● PEOPLE ● CONSTRUCTION

**Advanced tread compounding** with super single weight reduction provides lower rolling resistance.

Features 27/32" tread depth, an **evolving sipe tread design** and closed shoulder.

**Groove geometry** designed with stress reduction elements to separate forces and reduce premature wear.

**3D center sipes** increase groove strength for longevity, while allowing more tread block flexibility.



### Key Features



SmartWay® Verified



Retread Available

### Compares to

Michelin: X-One Line Energy D | Bridgestone: Greatec M835A Ecopia  
Goodyear: Fuel Max SSD


### Product Data - HDL2 Eco Plus

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
445/50R22.5	L	05210130000 05652840000	27	75	18.8	478	40.4	1027	17.5	445	19.2	488	14.00	N/A	N/A	512	318	200	91	10200, 120 (4625, 830)	N/A

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HDL2+ Eco Plus

## Fuel-Efficient, Drive for Car Carriers


✓ GOODS ● PEOPLE ● CONSTRUCTION

**Advanced tread compounding** provides extended original mileage and improved rolling resistance.

**Closed shoulder tread design** provides even tread wear while still providing excellent traction.

**Patented innovative groove technology** leads to minimal stone retention, extending casing life.

Offers large capacity and car carrier trucks the ability to **carry more weight without sacrificing vehicle height.**



### Key Features



SmartWay® Verified

### Compares to


Michelin: X Multi D 295 | Bridgestone: M749

Product Data - HDL2+ Eco Plus																					
Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
295/60R22.5	J	05211410000 05652270000	24	75	17.1	434	37.0	1071	11.5	292	11.9	302	9.00, 9.75	12.9	328	559	348	118	54	7390, 130 (3350, 900)	6780, 130 (3075, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE    ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HDL2 DL+

## Deep Lug Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION


New tread cap/base compounds provide **improved wear performance** extending original tire life.

**32/32" tread depth** provides high mileage and low cost per mile.

**Patented innovative groove technology** leads to minimal stone retention, extending casing life.

**Minimized wear and increased traction over the life of the tire** through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features



3G Casing



Retread Available

### Compares to

Michelin: XDA5+ | Bridgestone: M726 ELA


### Product Data - HDL2 DL+

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	LBS, PSI (KG, kPa)	LBS, PSI (KG, kPa)
11R22.5	G	05211670000 05653440000	32	75	19.9	504	42.2	1071	11.6	294	13.0	329	8.25, 7.50	12.5	318	491	305	131	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)		
11R22.5	H	05211680000 05653450000	32	75	19.9	504	42.2	1071	11.6	294	13.0	329	8.25, 7.50	12.5	318	491	305	134	61	6610, 120 (3000, 830)	6005, 120 (2725, 830)		
295/75R22.5	G	05211690000 05653460000	32	75	19.1	485	40.8	1036	11.4	290	12.7	323	8.25, 9.00	12.5	318	507	315	126	57	6175, 110 (2800, 760)	5675, 110 (2575, 760)		
11R24.5	H	05211720000 05653480000	32	75	20.7	526	44.2	1122	11.6	294	13.0	320	8.25, 7.50	12.5	318	468	291	143	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)		
285/75R24.5	G	05211730000 05653490000	32	75	19.7	501	42.2	1072	11.4	290	12.6	321	8.25	12.5	318	491	305	131	60	6175, 110 (2800, 760)	5675, 110 (2575, 760)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HDL2 DL Eco Plus

## Fuel-Efficient, Deep Lug Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION


**Advanced tread compounding** provides this Eco Plus version with 33% less rolling resistance than the original HDL2 DL.

**32/32" tread depth** provides high mileage and low cost per mile.

**Patented innovative groove technology** leads to minimal stone retention, extending casing life.

Minimized wear and excellent traction over the life of the tire, through a **wide, closed shoulder tread and numerous tread blocks** with multiple grip edges.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features

**3G**

3G Casing



SmartWay® Verified

### Compares to

Goodyear: Endurance LHD

### Product Data - HDL2 DL Eco Plus


Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05211100000 05651850000	32	75	19.7	500	42.2	1071	11.6	294	13.0	329	8.25, 7.50	12.5	318	491	305	132	60	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5	G	05211520000 05654270000	32	75	19.1	485	40.8	1036	11.4	289	12.7	323	8.25, 9.00	12.5	318	507	315	126	57	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.





# Conti HTL 3

## Mileage-Balanced Trailer


✓ GOODS ● PEOPLE ● CONSTRUCTION

**Advanced tread compound** and optimized tread design provide exceptional mileage.

**Low rolling resistant** trailer tire delivers outstanding fuel efficiency in long haul applications.

Built on the **Continental 3G Casing** for maximum retreadability.

**Improved sidewall construction** for defense against curbing, cuts and abrasions.



### Key Features

**3G**

3G Casing



SmartWay® Verified

### Compares to

Michelin: X Line Energy T/T2 | Goodyear: G316 LHT


### Product Data – Conti HTL 3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05310820000 05653750000	13	75	19.2	488	41.2	1046	11.7	297	13.1	333	8.25, 7.50	12.5	318	502	312	109	49	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5	G	05310830000 05653760000	13	75	18.5	470	39.7	1008	11.5	292	12.9	328	8.25, 9.00	12.5	318	521	324	104	47	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	G	05310840000 05653770000	13	75	20.1	511	43.2	1097	11.7	297	13.1	333	8.25, 7.50	12.5	318	479	298	117	53	6610, 105 (3000, 720)	6005, 105 (2725, 720)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti EcoPlus HT3

## Fuel-Efficient Trailer


✓ GOODS ● PEOPLE ● CONSTRUCTION

**Advanced tread compound** and optimized tread design provide exceptional mileage.

**Ultra low rolling resistant** trailer tire delivers outstanding fuel efficiency in long haul applications.

**Improved sidewall protection** for defense against curbing, cuts and abrasions.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features



3G Casing



SmartWay® Verified



Retread Available

### Compares to

Michelin: X Line Energy T/T2 | Bridgestone: R123 Ecopia  
Goodyear: Fuel Max LHT


### Product Data – Conti EcoPlus HT3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05310280000 05650960000	13	75	19.2	488	41.2	1046	11.7	297	13.1	331	8.25, 7.50	12.5	318	502	312	109	49	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5	G	05310270000 05650910000	13	75	18.5	470	39.7	1008	11.5	292	12.9	328	8.25, 9.00	12.5	318	522	324	104	47	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HTL1

## Fuel-Efficient, Super Single Trailer

✓ GOODS ● PEOPLE ● CONSTRUCTION

**13/32" tread depth** minimizes irregular wear.

**Shoulder defense groove** provides protection against rapid shoulder wear.

**Patented innovative groove technology** leads to minimum stone retention, extending casing life.



### Key Features




SmartWay® Verified



Retread Available

### Compares to

Michelin: X One Line Energy T2 | Bridgestone: Greatec R197 Ecopia  
Goodyear: Fuel Max SST




### Product Data - HTL1

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, kPa)		LBS, PSI (KG, kPa)														
445/50R22.5	L	05310000000 05652500000	13	75	18.1	460	39.2	996	17.3	439	19.0	483	14.00	N/A	N/A	528	328	179	81	10200, 120 (4625, 830)	N/A

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HTL2 Eco Plus

## 17.5" Heavy Haul Trailer

✓ GOODS ● PEOPLE ✗ CONSTRUCTION


**Low rolling resistance compound** provides excellent fuel economy and cool operating temperatures.

**Advanced tread design** provides long original mileage and low cost per mile.

**Heavy ply construction** for structural durability in large capacity applications.

**Innovative groove geometry** promotes efficient water evacuation, traction and wet braking capabilities throughout tire life.

**Patented groove technology** leads to minimum stone retention, extending casing life.



### Compares to

Michelin: XTA2 Energy | Bridgestone: R238 | Goodyear: KMax T

### Product Data – HTL2 Eco Plus

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
					Single		Dual														
215/75R17.5	H	05311070000 05656150000	15	75	14.1	359	30.4	772	8.5	215	9.1	231	6.00, 6.75	9.5	242	681	423	61	28	4805, 125 (2180, 860)	4540, 125 (2060, 860)
235/75R17.5	J	05310180000 04650170000	13	75	14.5	369	31.6	802	9.2	234	10.0	254	6.75, 7.50	10.6	269	656	407	65	29	6005, 125 (2725, 860)	5675, 125 (2575, 860)
245/75R17.5	J	05310190000 04650160000	13	75	14.5	369	31.6	802	9.2	234	10.0	254	6.75, 7.50	10.6	269	656	407	65	29	6005, 125 (2725, 860)	5675, 125 (2575, 860)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

# Dealer Marketing Suite

A One-Stop Shop for All Your Marketing Needs.



ContiTread

GENERAL TIRE

AMERI★STEEL



## Marketing Suite Features


- Latest literature for all brands.
- Point-of-sale and promotional items.
- Custom flyers for your event.
- All forms including D-9 and Warranty.

## The Dealer Marketing Suite Offers Free and Paid Services:

- Download PDF documents for free.
- Order printed literature, forms, and promo items with a credit card.

## How to Access:

1. Log into ContiLink ([www.contilink.com](http://www.contilink.com)).
2. Scroll down until you see the “**Dealer Marketing Suite**”.
3. Click on “**Read More**”.
4. The Dealer Marketing Suite will open and allow you to browse items!

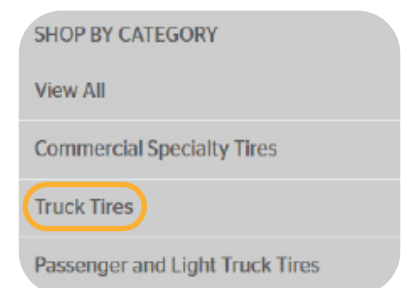

## First Time Login:

1. Log into ContiLink ([www.contilink.com](http://www.contilink.com)).
2. Scroll down until you see the “**Dealer Marketing Suite**”.
3. Click on “**Read More**”.
4. You will receive a message that your Dealer Marketing Suite account has been requested. The account will be created within a few hours.

## Don't Forget!

The ContiTireDrive app gives you access to PDF literature for all brands on your mobile device.



Available for iOS and Android



# Long Haul

## Retread Product Overview



HDL 3 LTL-R  
 



HDL2 DL  




HDL



HDL Eco Plus  





HDL2 Eco Plus  
 



HT  






HTL



HTL1  
 

Legend:

 SmartWay® Verified	 New Tire Available
---	---

## ContiTread HDL 3 LTL-R

### Fuel-Efficient, Single Axle Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18215140000	22
220	18215150000	22
230	18215160000	22
240	18215170000	22

- Maximum fuel efficiency and high removal miles from advanced tread compounding.
- Resists irregular wear caused from high-torque single drive position, including heel-toe wear, thanks to rigid tread blocks that effectively control movement.
- 3D matrix sipes provide superior traction and even wear.
- Maximum stone ejection due to superior groove geometry.

## ContiTread HDL2 DL

### Deep Lug Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18217680000	28
225	18217690000	28
235	18217700000	28
245	18217710000	28

- Optimized compound with ultra deep tread delivers high mileage.
- Minimized wear and excellent traction over the life of the tire through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

## ContiTread HDL


### Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18217730000	26
225	18217740000	26
235	18217750000	26
245	18217760000	26
215	18217770000	20
225	18217780000	20
235	18217790000	20
215	18217820000	13
225	18217830000	13
235	18217840000	13

- Cut and tear resistant tread compound for excellent wear.
- Closed shoulder tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Legend:



## ContiTread HDL Eco Plus

### Fuel-Efficient Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18204820000	26
225	18204830000	26
235	18204840000	26
245	18204850000	26
215	18204860000	20
225	18204870000	20
235	18204880000	20
245	18204890000	20

- Advanced, fuel-efficient compound provides long original mileage and rolling resistance.
- Closed shoulder tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

## ContiTread HDL2 Eco Plus

### Fuel-Efficient, Super Single Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
390	18209240000	24

- Super single drive tire with advanced compounding for low rolling resistance and high mileage.

## ContiTread HT



### Fuel-Efficient Trailer



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18219650000	11
210	18219660000	11
220	18219670000	11
230	18219680000	11
240	18219790000	11

- Enhanced rounded shoulder design increases its shoulder durability in high scrub situation.
- Innovative tread compound combined with tread pattern deliver outstanding removal mileage.
- Delivers up to 20% improved rolling resistance when compared to the Conti EcoPlus HT3.

Legend:

	
SmartWay® Verified	New Tire Available



# ContiTread HTL

## Trailer




Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18208720000	13
210	18205420000	13
220	18205440000	13
230	18205460000	13

- 13/32" tread depth minimizes tread squirm and irregular wear.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

# ContiTread HTL1



## Fuel-Efficient, Super Single Trailer



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
390	18214670000	13

- Optimized compound for regional and long hauling delivers high mileage.
- Proven 13/32" tread design.
- New solid shoulder design for durability.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Legend:

	
SmartWay® Verified	New Tire Available

# EPA SmartWay®



## Reducing Transportation-Related Emissions and Improving Supply Chain Fuel Efficiency

### Verified Low Rolling Resistance Tire Products

The EPA has determined that certain tire product models and technologies can reduce NOx emissions and fuel use by 3 percent or more, relative to the best-selling products for line haul class 8 tractor trailers. These improvements are achieved under the following conditions:

- Tires are used in the correct axle positions.
- Verified low rolling resistance tires are installed on all of the axle positions of the tractor and trailer.
- All tires must be properly inflated according to the manufacturer’s specifications.

For more information on SmartWay® or to review the list of SmartWay® verified low rolling resistance tires and retread technologies, visit [www.epa.gov/smartway](http://www.epa.gov/smartway).

More tires and retreads may currently be verified by SmartWay®, always review the SmartWay® website for current information.



Fuel Savings



Cleaner Air




Cost Savings



Environmentally Friendly

The following Continental low rolling resistance tire products are SmartWay® verified when used on class 8, line-haul tractor trailers:

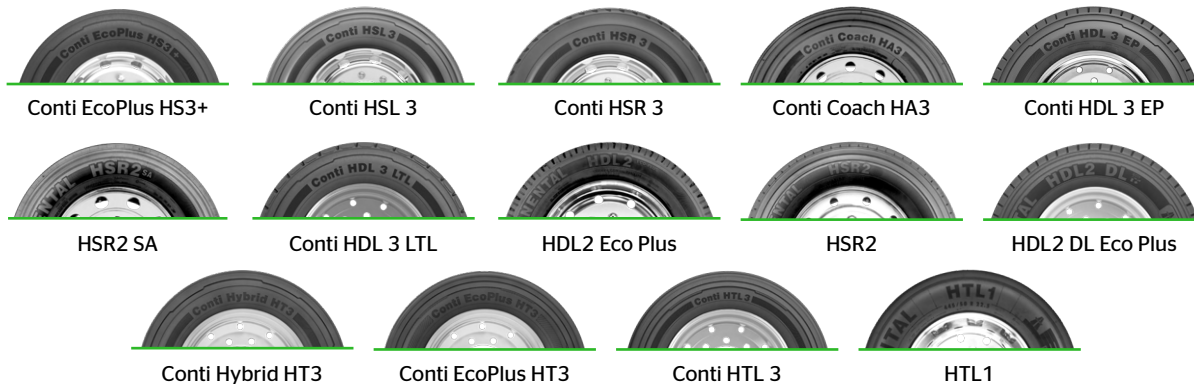

ContiTread Retreads: HDL 3 LTL-R, HDL Eco Plus, HDL2 Eco Plus, HTL1, HT



Long Removal Mileage // Cut/Chip Resistance // Resistance to High Scrub // Robust Casing Construction

# Regional

## For Highway & Local Driving

**Engineered for your application.** Tires for Regional use are designed for applications where vehicles spend the majority of their time on pavement with multiple stops through inter-city operations, and mostly paved roads. Tires are optimized for high scrub, cut-chip resistance applications, as well as traction.

**IMPORTANT NOTE:** Tire products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.

REGIONAL

# Regional

## New Tire Product Overview (22.5" and larger)



Conti HSR 3  
3G



HSR2



HSR2 SA



HTR2



HDR2+  
3G



HDW2  
3G



Conti Scandinavia HD3  
3G



HDR



Conti Hybrid HT3

Legend:

3G 3G Casing	SmartWay® Verified	Intelligent Tire	Retread Available	EV  EV Compatible	Other Sizes Available
-----------------	--------------------	------------------	-------------------	-------------------	-----------------------

# Regional

## New Tire Product Overview (19.5" and smaller)

### 19.5" Tires



Conti HSR 5 (19.5")



Conti Hybrid HS3 (19.5")



Conti HDR 5 (19.5")



Conti Hybrid HD3 (19.5")



Scandinavia HD3 (19.5")



Conti Hybrid HT3 (19.5")



### 17.5" Tires



LSR1 (17.5")



HTR2 (17.5")



Conti LAR 3 (16")

### 16" Tire

Legend:



3G Casing



SmartWay® Verified



Intelligent Tire




Retread Available



EV Compatible



Other Sizes Available



# Conti HSR 3

## Fuel-Efficient All-Position


✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION

**Enhanced belt package and tread compound** for improved mileage and cut/tear resistance.

**Zigzag center groove geometry** increases the number of biting edges for increased traction.

**Pyramidal stone ejection system** for maximum casing protection.

Built on the innovative **Continental 3G Casing** for maximum retreadability.



### Key Features



3G Casing



Retread Available



SmartWay® Verified

### Compares to

Michelin: XZE2 | Bridgestone: R250ED | Goodyear: Endurance RSA

## Product Data – Conti HSR 3


Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
11R22.5	G	05124370000 05652560000	23	75	19.5	495	41.9	1064	11.6	295	13.0	330	8.25, 7.50	12.5	318	494	307	131	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05124380000 05652570000	23	75	19.5	495	41.9	1064	11.6	295	13.0	330	8.25, 7.50	12.5	318	494	307	133	60	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05124390000 05652580000	23	75	20.2	513	42.8	1086	11.9	302	13.1	333	9.00, 8.25	13.7	348	484	301	147	67	7390, 120 (3350, 830)	6780, 120 (3075, 830)
295/75R22.5	H	05124410000 05652600000	23	75	18.9	480	40.2	1022	11.8	299	12.9	328	8.25, 9.00	13.4	340	514	320	127	58	7160, 123 (3250, 850)	6610, 123 (3000, 850)
11R24.5	H	05124430000 05652620000	23	75	20.5	521	43.8	1113	11.6	295	13.0	330	8.25, 7.50	12.5	318	473	294	143	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05124450000 05652640000	23	75	19.5	496	41.6	1057	11.8	300	12.9	328	8.25	12.5	318	498	309	133	60	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

PLEASE NOTE: THIS PRODUCT WAS PREVIOUSLY NAMED CONTI CROSSTRAC HA3.

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HSR2

## All-Position


✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION

23/32" deep **improved cut and chip resistant tread compound** for optimal performance.

**Protective curb rib** for high scrub applications.

**Patented innovative groove technology** leads to minimum stone retention, extending casing life.

**Patented groove geometry** for better resistance to cracking and tearing.



### Key Features



SmartWay® Verified

### Compares to

Michelin: XZE2 | Bridgestone: R250ED | Goodyear: Endurance RSA

### Product Data - HSR2

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
10R22.5	G	05686570000	20	75	18.8	478	40.0	1016	10.0	254	10.8	274	7.50 6.75, 8.25	11.4	290	518	322	100	45	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5	G	05686300000 05651060000	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25, 7.50	12.5	318	498	309	119	54	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05129220000 05655720000	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25, 7.50	12.5	318	498	309	121	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05120880000 05651750000	23	75	20.1	510	42.8	1088	11.7	297	12.9	327	9.00, 8.25	13.5	343	483	300	135	61	7390, 120 (3350, 830)	6780, 120 (3075, 830)
275/80R22.5	H	05686350000 05651080000	23	75	18.7	475	40.0	1016	11.1	282	12.6	320	8.25	12.5	318	518	322	115	52	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5	H	05686330000 05651110000	23	75	20.4	518	43.5	1105	11.1	282	12.0	305	8.25	12.5	318	476	296	130	59	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05687020000 05652200000	23	75	19.4	493	41.3	1049	10.7	272	12.1	307	8.25	12.5	318	501	311	120	55	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HSR2 SA

## Fuel-Efficient All-Position

✓ GOODS ✓ PEOPLE ● CONSTRUCTION

Maximum tire life expectancy and wet traction capabilities through **customized tread geometry**.

**Even tread wear under all load conditions** due to optimized contour and balanced pressure distribution.

**Superb wet traction** capabilities with minimum wear through innovative tread compound.

Ideal for buses and larger recreational vehicles. Maximum tire life expectancy and wet traction capabilities through **customized tread geometry**.




### Key Features



SmartWay® Verified

### Compares to



Michelin: XZE2+, X Multiway XZE | Bridgestone: R250 ED | Goodyear: G670 RV MRT

Product Data - HSR2 SA																					
Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
255/70R22.5	H	05122460000 05652210000	18	75	17.1	434	36.6	930	10.0	255	10.8	274	8.25, 7.50	11.3	287	565	351	88	40	5510, 120 (2500, 830)	5070, 120 (2300, 830)
275/70R22.5	J	05121290000 05651640000	18	75	17.8	451	37.9	962	10.7	272	11.6	295	8.25	12.4	315	547	340	107	49	6940, 130 (3150, 900)	6395, 130 (2900, 900)
315/80R22.5	L	05120980000 05651720000	19	75	19.8	503	42.5	1080	12.5	317	12.5	316	9.00, 8.25*	13.8	351	487	303	143	65	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

\*315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi in dual usage, and 8000 lbs at 120 psi in single usage.

■ STANDARD ARTICLE    ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.





# HTR2

## Mileage-Balanced All-Position


✓ GOODS ● PEOPLE ✓ CONSTRUCTION

High mileage achieved through precise balance of compound and tread geometry.

**Tread pattern** designed for increased stability and reduced noise.

**Increased fuel efficiency** due to optimized tread pattern and reduced tire weight.

**Patented innovative groove technology** leads to minimum stone retention, extending casing life.



### Key Features



Retread Available



Available in **17.5"**

### Compares to

Michelin: XFE | Bridgestone: R244 | Goodyear: G296 MSA


### Product Data – HTR2

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	Single	Dual
																						LBS, PSI (KG, kPa)	LBS, PSI (KG, kPa)
385/65R22.5	L	05320080000 05651250000	21	68	19.5	495	42.0	1067	14.8	376	16.3	414	11.75, 12.25	N/A	N/A	493	306	165	75	9920, 130 (4500, 900)	N/A		
425/65R22.5	L	05320260000 05651620000	22	68	20.3	515	44.3	1126	16.6	422	18.0	457	13.00, 14.00, 12.15	N/A	N/A	467	290	185	84	11400, 120 (5150, 830)	N/A		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HDR2+ Drive

✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION

**Improved cap/base tread compounds** for improved wear performance, wet traction and cut/chip/chunk performance.

Optimized contour and **balanced footprint distribution** for extended tread life and product performance.

**Chambered tread block geometry** to withstand higher drive axle torque with reduced drive tire wear conditions such as tearing and cracking.

Built on the **Continental 3G Casing** for maximum retreadability.



## Key Features



3G Casing



Retread Available



## Compares to

Michelin: X Multi D | Bridgestone: M770 | Goodyear: G182 RSD


### Product Data - HDR2+

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, kPa)	LBS, PSI (KG, kPa)
*10R22.5	G	05224330000 05653430000	24	75	19.0	483	40.4	1026	10.0	295	11.0	278	7.50, 6.75, 8.25	11.4	290	513	318	103	47	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5	G	05224340000 05653360000	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	129	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05224350000 05653370000	30	75	19.8	502	42.2	1071	11.6	295	13.0	333	8.25, 7.50	12.5	348	491	305	132	60	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05224360000 05653420000	30	75	20.3	515	43.2	1098	11.9	301	13.2	335	9.00, 8.25	13.5	343	479	297	149	68	7390, 120 (3350, 830)	6780, 120 (3075, 830)
295/75R22.5	G	05224370000 05653390000	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	124	56	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05224380000 05653400000	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	126	57	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05224390000 05653380000	30	75	20.6	524	44.2	1123	11.6	295	13.0	330	8.25, 7.50	12.5	318	468	291	141	64	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer. \*10R22.5 is a 4 rib pattern for the HDR2+ tire.



# HDW2

## All-Season Drive

✓ GOODS ✓ PEOPLE ● CONSTRUCTION

**All-season tire** ensures optimum performance in a variety of winter conditions from ice to deep snow.

**Directional tread design** with more than 1,000 sipes provides excellent traction and lateral stability in extreme weather conditions.

Siping engineered with Continental's **3D-Technology**.

Compounding developed to deliver **traction and mileage** over life of tire.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features



Retread Available



3G Casing



3PMSF Designation



Mud + Snow Designation

### Compares to


Michelin: XDN2 | Bridgestone: W919 | Goodyear: G182 RSD

Product Data - HDW2																							
Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
																							Single
11R22.5	H	05230920000 05655760000	27	75	19.6	497	41.9	1063	11.6	294	13.0	329	8.25	12.5	318	495	307	131	59	6940, 120 (3150, 830)	6395, 120 (2900, 830)		
11R24.5	H	05230800000 05655100000	27	75	20.6	522	43.9	1114	11.6	294	13.0	329	8.25	12.5	318	472	293	140	63	7160, 120 (3250, 830)	6610, 120 (3000, 830)		
295/75R22.5	H	05230650000 05654080000	27	75	19.1	486	40.6	1031	11.7	297	12.6	320	8.25, 9.00	12.5	318	510	317	126	57	6610, 120 (3000, 830)	6005, 120 (2725, 830)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Scandinavia HD3

## All-Season Drive


✓ GOODS ● PEOPLE ● CONSTRUCTION

**Multiple sipe technologies including 3D siping** to provide traction during winter weather conditions throughout the life of the tire.

**Directional M + S tread pattern** delivers even wear and traction in both mud or snow.

**All-season compounding** to deliver performance during any season.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features

**3G**

3G Casing Retread Available Available in **19.5"**



3PMSF Designation Mud + Snow Designation

**M+S**

### Compares to

Michelin: XDS 2 | Bridgestone: W919 | Goodyear: UltraGrip RTD


### Product Data - Conti Scandinavia HD3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, kPa)	LBS, PSI (KG, kPa)
11R22.5	H	05230560000 05655180000	27	75	19.8	502	42.0	1067	11.6	295	12.7	323	8.25, 7.5	12.5	318	493	306	130	59	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05230570000 05655190000	27	75	20.6	524	44.0	1118	11.6	295	12.7	323	8.25, 7.50	12.5	318	470	292	140	64	7160, 120 (3250, 825)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# HDR

## Fuel-Efficient Drive

✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION

**Multi-service tread compound** for local and long haul service.

**Offset center tread blocks** provide excellent all-weather traction.

**Tapered tread grooves** reduce stone retention for long casing life and multiple retreads.



### Key Features



SmartWay® Verified

### Compares to

Michelin: X Multi D | Bridgestone: M726 | Goodyear: Fuel Max RTD




Product Data - HDR																					
Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
255/70R22.5	H	05654950000	26	81	17.3	439	37.0	940	10.0	255	10.8	274	8.25, 7.50	11.3	287	559	347	96	44	5510, 120 (2500, 830)	5070, 120 (2300, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Hybrid HT3

## Fuel-Efficient, Spread Axle Trailer

✓ GOODS ● PEOPLE ✓ CONSTRUCTION

**Advanced tread compound** to achieve performance in high scrub application and still maintain low rolling resistance.

**Patented groove technology** for minimal stone retention, extending casing life.

**Pyramidal stone ejection** system integrated into the center groove for added casing protection.

**Superior performance in spread-axle trailer applications vs. HSR2.** \*Based on projected calculations.



### Key Features




SmartWay® Verified



Retread Available



Available in 19.5"



### Compares to

Michelin: XTE | Bridgestone: R196A, R250F | Goodyear: Endurance RSA ULT


### Product Data - Conti Hybrid HT3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
255/70R22.5	H	05311030000 05655430000	16	75	17.2	437	36.6	928	9.9	252	10.7	271	7.50, 8.25	11.3	287	566	352	89	41	5510, 120 (2500, 825)	5070, 120 (2300, 825)
11R22.5	G	05321060000 05651000000	16	75	19.2	488	41.2	1046	11.1	282	12.0	305	8.25	12.5	318	502	312	111	50	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05323060000 05655740000	16	75	19.2	488	41.2	1046	11.1	282	12.0	305	8.25	12.5	318	502	312	113	51	6610, 120 (3000, 825)	6005, 120 (2725, 825)
295/75R22.5	G	05321040000 05651650000	16	75	18.5	470	39.6	1006	11.1	282	12.6	320	8.25	12.5	318	523	325	107	49	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	H	05321260000 05651190000	16	75	20.2	513	43.1	1095	11.1	282	12.0	305	8.25	12.5	318	480	298	122	55	7160, 120 (3200, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05321280000 05651210000	16	75	19.2	488	40.9	1039	10.7	272	12.1	307	8.25	12.5	318	506	314	114	52	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti LAR 3

## 16" All-Position

✓ GOODS ✓ PEOPLE ● CONSTRUCTION

All steel radial designed for outstanding durability and maximum retreadability.

**Specialized compounding** delivers outstanding mileage while still providing excellent fuel efficiency.

**10-ply light truck all steel casing** provides increased load carrying capacity, durability and puncture resistance.



### Key Features



All Steel Casing

### Compares to

Michelin: XPS RIB | Bridgestone: Duravis R238  
Goodyear: Endurance RSA ULT


### Product Data - Conti LAR 3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
LT215/85R16	E	04120940000	14	93	14.3	364	30.6	776	8.9	226	9.6	244	6.00	10.1	258	678	421	53	24	2680, 80 (1215, 550)	2470, 80 (1120, 550)
LT225/75R16	E	04120950000 04650140000	14	93	13.9	352	29.7	754	8.9	225	9.5	242	6.00	10.0	254	697	433	52	24	2680, 80 (1215, 550)	2470, 80 (1120, 550)
LT235/85R16	E	04120960000	14	93	14.4	366	30.9	786	9.9	251	10.6	270	7.00	11.0	279	669	416	56	25	3085, 80 (1400, 550)	2755, 80 (1250, 550)
LT245/75R16	E	04120970000	14	93	14.4	366	30.9	786	9.9	251	10.6	270	7.00	11.0	279	669	416	56	25	3085, 80 (1400, 550)	2755, 80 (1250, 550)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# LSR1


## 17.5" All-Position

✓ GOODS ● PEOPLE ● CONSTRUCTION

**Multi-rib tread design** features excellent wet traction, lateral stability and reduced noise.

**Patented innovative groove** technology leads to minimum stone retention, extending casing life.

**Advanced tread compound** provides long original mileage in regional applications.



### Key Features



Retread Available

### Compares to

Michelin: XZA | Goodyear: G114 LHT

### Product Data – LSR1


Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LB, PSI	KG, KPa	LB, PSI	KG, KPa
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)																
10R17.5	H	04121950000	17	75	15.7	398	33.8	858	10.0	254	10.3	262	7.50, 6.75	11.3	286	613	381	70	32	4675, 115 (2120, 790)	4410, 115 (2000, 790)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE    ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.





# HTR2

## 17.5" Trailer

✓ GOODS ● PEOPLE ✗ CONSTRUCTION

**Robust tread compound** engineered to protect against cutting and chipping.

**Innovative groove geometry** designed to prevent stone retention and drilling.

**Wide tread and shoulder ribs** for improved wear and increased scuff resistance.



### Key Features



Available in **22.5"**

### Compares to

Michelin: X Multi T2 | Bridgestone: R238 | Goodyear: G114 LHT


### Product Data – HTR2 (17.5")

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single		Dual	
																				LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)		
215/75R17.5	H	04920350000	16	68	14.1	359	30.2	767	8.3	211	8.6	218	6.00, 6.75	9.4	239	688	427	60	27	4805, 125 (2180, 860)	4540, 125 (2060, 860)		
235/75R17.5	H	04920360000	16	68	14.7	373	31.4	797	9.2	233	9.5	242	6.75, 7.50	10.3	262	662	412	72	33	6005, 125 (2725, 860)	5675, 125 (2575, 860)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti HSR 5

## 19.5" Steer/All-Position

✓ GOODS ● PEOPLE ● CONSTRUCTION

New tread compound for improved **rolling resistance and tread durability**.

Designed with full width siping for **improved traction and handling** during life of the tire.

Developed to provide **excellent lateral stability** to minimize squirm and improve handling.



### Key Features



3PMSF Designation Mud + Snow Designation Retread Available

M+S



### Compares to

Michelin: Agilis HD Z | Bridgestone: R238  
Goodyear: Fuel Max RSA ULT, Range Max RSA ULT



### Product Data – Conti HSR 5 (19.5")

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	Single	Dual
																						LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5	G	05124460000 05655060000	16	87	15.1	383	32.0	813	8.6	218	9.3	236	6.00, 6.75	10.0	254	647	402	60	28	3970, 110 (1800, 760)	3750, 110 (1700, 760)		
225/70R19.5	H	05128420000 05655090000	16	87	15.1	383	32.0	813	8.6	218	9.3	236	6.75*	10.0	254	647	402	62.5	29	4190, 120 (1900, 830)	3970, 120 (1800, 830)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

\*ONLY APPROVED RIM SIZE

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Hybrid HS3

## 19.5" All-Position

✓ GOODS ✓ PEOPLE ● CONSTRUCTION

**Two-layer tread construction** combines high mileage performance in the cap compound with significant rolling resistance improvements in the base compound.

**Narrowed groove widths** result in increased pattern volume which improves wear resistance to guarantee high mileage performance.

**Pocket sipe technology** with full-depth sipes to enhance water displacement and improve wet performance over the life of the tire.



### Compares to

Michelin: Agilis HD Z, X Multi Z | Bridgestone: R238  
Goodyear: Fuel Max RSA ULT


### Product Data - Conti Hybrid HS3 (19.5")

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
245/70R19.5	G	05122970000 05654330000	16	81	15.2	386	32.8	833	9.5	241	10.3	262	7.50, 6.75	11.0	279	631	392	78	35	4540, 110 (2060, 760)	4300, 110 (1950, 760)
245/70R19.5	H	05111130000	16	81	15.2	386	32.8	833	9.5	241	10.3	262	7.50, 6.75	11.0	279	631	392	78	35	4940, 120 (2240, 830)	4675, 120 (2120, 830)
265/70R19.5	G	05128650000	17	81	15.8	401	34.7	881	10.3	262	10.7	272	7.50, 6.75, 8.25	11.2	286	613	380	82	37	5510, 115 (2500, 790)	4205, 115 (2360, 790)
285/70R19.5	H	05128630000	18	81	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 7.50, 9.00	12.5	318	590	366	93	42	6610, 125 (3000, 860)	6175, 125 (2800, 860)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti HDR 5

## 19.5" Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION

New tread compound for improved **rolling resistance and tread durability**.

New **open-shoulder** tread design.

3D matrix siping for **improved traction and wear** over life of tire.

Tread pattern designed to deliver **M+S** (Mud and Snow) and **3PMSF** (Three Peak Mountain Snowflake) for demanding conditions.

16/32" tread pattern designed to deliver **improved mileage and handling** performance.



### Key Features




3PMSF Designation

**M+S**

Mud + Snow Designation



Retread Available



### Compares to

Michelin: XDS 2 | Bridgestone: M729F | Goodyear: Fuel Max RTD ULT, Range Max RTD UTL

### Product Data - Conti HDR 5 (19.5")

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	Single	Dual
																						LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5	G	05223820000 05655050000	16	87	15.1	383	32.0	813	8.6	218	9.3	236	6.00, 6.75	10.0	254	646	401	61	28	3970, 110 (1800, 760)	3750, 110 (1700, 760)		
225/70R19.5	H	05225820000 05655080000	16	87	15.1	383	32.0	813	8.6	218	9.3	236	6.75*	10.0	254	647	402	62.5	29	4190, 120 (1900, 830)	3970, 120 (1800, 830)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

\*ONLY APPROVED RIM SIZE

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Hybrid HD3

## 19.5" Drive

✓ GOODS ✓ PEOPLE ● CONSTRUCTION

Advanced application-optimized **hybrid tread compound** adds up to significant improvements in rolling resistance and mileage.

**Chambered edge** reduces deformation amplitude in sidewall and bead area which results in improved rolling resistance and helps lower fuel consumption.

**Narrowed groove widths** result in increased pattern volume which improves wear resistance to guarantee high mileage performance.




### Key Features

**M+S**

Mud + Snow Designation

### Compares to

Michelin: XDS 2 | Bridgestone: M729F  
Goodyear: Fuel Max RTD ULT




### Product Data - Conti Hybrid HD3 (19.5")

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	
																						Single	Dual
245/70R19.5	G	05222240000	19	81	15.5	393	33.2	843	9.7	246	10.3	263	7.50, 6.75	11.0	279	623	387	82	37	4540, 110 (2060, 760)	4300, 110 (1950, 760)		
245/70R19.5	H	05210830000	19	81	15.5	393	33.2	843	9.7	246	10.3	263	7.50, 6.75	11.0	279	623	387	82	37	4940, 120 (2240, 830)	4675, 120 (2120, 830)		
265/70R19.5 Tread B	G	05225540000	20	81	15.8	401	34.7	881	10.3	262	10.7	272	7.50, 6.75, 8.25	11.2	286	613	381	86	39	5510, 115 (2500, 790)	4205, 115 (2360, 790)		
285/70R19.5 Tread B	H	05220880000	20	81	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 7.50, 9.00	12.5	318	590	366	97	44	6610, 125 (3000, 860)	6175, 125 (2800, 860)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Scandinavia HD3

## 19.5" All-Season Drive

✓ GOODS ✓ PEOPLE ● CONSTRUCTION

**Deep tread and low void design** ensures long removal miles.

Heavy siping provides **numerous gripping edges** for excellent traction on wet roads.

**Open shoulder tread** design for increased traction in snow.

**Increased footprint** contact area delivers superior traction and stability.

**All-season compound** to deliver excellent traction in all weather conditions without sacrificing removal miles.



### Key Features

**M+S**

Mud + Snow Designation Available in **22.5" & 24.5"**



### Compares to

Michelin: XDS 2 | Bridgestone: M704


### Product Data - Conti Scandinavia HD3 (19.5")

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
225/70R19.5	G	05230340000	19	87	15.1	383	32.0	813	8.6	218	9.3	236	6.00, 6.75	10.0	254	647	402	65	30	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5	H	05230360000	21	81	15.5	394	33.3	846	9.5	241	10.4	264	7.50, 6.75	11.0	279	622	386	80	36	4940, 120 (2240, 830)	4675, 120 (2120, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Hybrid HT3

## 19.5" Trailer

✓ GOODS ● PEOPLE ✓ CONSTRUCTION

**Advanced application-optimized compound** adds up to significant improvements in rolling resistance and mileage.

**Narrowed groove widths** result in increased pattern volume which improves wear resistance to provide high mileage performance.

**Low rolling resistance** sidewall compound used to reduce heat through friction elimination.



### Key Features



Available in **22.5"** & **24.5"**

### Compares to

Michelin: X Line Energy T

### Product Data - Conti Hybrid HT3 (19.5")

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
265/70R19.5	H	05322000000	17	68	15.8	401	34.7	881	10.3	262	10.7	272	7.50, 6.75, 8.25	11.6	295	609	378	80	36	6005, 125 (2725, 860)	5675, 125 (2575, 860)
285/70R19.5	J	05321680000	18	68	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 7.50, 9.00	12.5	318	590	366	93	42	7390, 130 (3350, 900)	6940, 130 (3150, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.




# Regional Retread Product Overview




HSR 5 (19.5")



HSR 3




HSR



LSR1



HDR 5 (19.5")



HDR2



HDR1



Scandinavia HD3



\*TREAD B

HDW2



Hybrid HT3





HTR2 SA



HTR2



Legend:

	
SmartWay® Verified	New Tire Available



## ContiTread HSR 5

### 19.5" Steer/All-Position



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18219600000	16
210	18219610000	16

- Tread compound designed to provide longer life in regional applications.
- Tread pattern and siping provides excellent wet/dry traction, and resists irregular wear.
- Narrow width for 19.5" casings.

## ContiTread HSR 3

### Fuel-Efficient All-Position



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18217870000	20
220	18217880000	20
230	18217890000	20
240	18217900000	20

- Zigzag center groove geometry increases the number of biting edges for increased traction.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Durable compounding for mileage.

## ContiTread HSR


### All-Position



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
195	18207940000	18
215	18204780000	18
225	18204790000	18
235	18204800000	18
260	18310610000	18


- Cut and chip resistant tread for long tread life.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Robust shoulder rib for long tread life.

Legend:



## ContiTread LSR1

17.5" All-Position




Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
180	18206080000	15
195	18206100000	15

- Advanced tread compound provides high mileage in regional applications.
- Multi-rib tread design features excellent wet traction, lateral stability and reduced noise.
- Unique pyramid shaped stone ejection system in all tread grooves reduce stone retention and casing penetrations.

## ContiTread HDR2

Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
185	18215760000	22
195	18215770000	22
205	18215780000	26
215	18215790000	26
225	18215800000	26
235	18215810000	26
245	182157820000	26

- Cut and tear resistance tread compound for excellent wear in regional and light on/off road applications.
- Optimal performance on various road conditions, through an innovative tread compound.
- Unidirectional, arrow shaped tread pattern minimizes typical drive tire wear effects.

## ContiTread HDR 5



19.5" Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18219620000	22
210	18219630000	22
220	18219640000	22

- Cut and tear resistant tread compound for excellent wear in regional applications.
- Open shoulder tread design along with advanced siping provides excellent wet/dry traction, and resists irregular wear.
- Narrow width for 19.5" casings.

Legend:

	
SmartWay® Verified	New Tire Available

## ContiTread HDR1

### Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
180	18215620000	16
190	18215630000	16
200	18215640000	16
190	18215660000	20
200	18215670000	20
205	18218070000	22
215	18215680000	22
225	18215690000	22
235	18215700000	22
215	18215720000	26
225	18215730000	26
235	18215740000	26
245	18215750000	26

- Cut and tear resistant tread compound for excellent wear in regional and light On/Off applications.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the tread.

## ContiTread Scandinavia HD3

### All-Season Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18211340000	25
220	18211350000	25
230	18211360000	25
240	18211370000	25

- Directional\* tread pattern for improved traction.
- Full sipes located on center ribs in center grooves at 22/32" for improved snow evacuation.
- Pocket sipes featured throughout the tread pattern at 13/32"
- Optimized groove geometry for stone trapping resistance.
- Tie bars included to improve wear mileage near end of life.



## ContiTread HDW2

### All-Season Drive





Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18209370000	27
225	18209380000	27
235	18209390000	27
245 (Tread B)	18209400000	27

- High-mileage compound
- All season tread ensures optimum performance in a variety of winter conditions from ice to snow.
- Directional\* tread design with more than 1,000 sipes provides excellent traction and lateral stability in 245 and 260 mm sizes.



Legend:

	
SmartWay* Verified	New Tire Available

## ContiTread Hybrid HT3

Fuel-Efficient, Spread Axle Trailer



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18214620000	16
210	18214630000	16
220	18214640000	16
230	18214650000	16

- New and improved winged tread for use in high scrub applications, particularly spread-axle and multi-axle.
- Durable high mileage compounding.
- Pyramidal stone ejection system integrated into the center groove for added casing protection.

## ContiTread HTR2 SA

Mileage-Balanced, Spread Axle Trailer



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
250	18207570000	16
260	18207580000	16
270	18207590000	16
290	18207600000	16

- Winged tread for use in high scrub applications, particularly spread-axle and multi-axle.
- High mileage achieved through precise balance of tread compound and geometry.

## ContiTread HTR2



Mileage-Balanced All-Position



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
290	18206730000	22
320	18206740000	22
340	18206750000	22

- High mileage achieved through precise balance of tread compound and geometry.
- Tread pattern designed for increased stability and reduced noise.
- Patented innovative groove technology leads to minimum stone retention.

Legend:

	
SmartWay® Verified	New Tire Available



Hours of Service // Superior Mileage // Durable Cut/Chip Compounding // Casing Durability

# Urban

## For Inner City Traffic & Short Distances

**Engineered for your application.** Urban tires are designed for inner city traffic applications where traction, hours of service and mileage are priority. Tires operating within this application normally operate through short distances experiencing heavy scrub. Tires are designed to withstand heat generation as well as heavy loads where safety is essential. Extra sidewall protection is required to protect the casing from curbing, cuts and abrasions. Casing durability is the key aspect for segment satisfaction.

**IMPORTANT NOTE:** Tire products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.

# Urban

## New Tire Product Overview



Conti HAU 5



Conti Urban HA3



Conti HAU 3 WT



Legend:



3G Casing



SmartWay® Verified



Intelligent Tire




Retread Available



EV Compatible



Other Sizes Available



# Conti HAU 5

## Metro Service All-Position

● GOODS ● **PEOPLE** ● CONSTRUCTION

**EV Compatible.** This product meets the diverse requirements of combustion engine, hybrid and electric vehicles.

**Sidewall wear indicators** provide clear warning when tires need to be removed from service for **safety**.


**Additional sidewall protection** for resistance against curbing, abrasions and cuts.

Tread compounding delivers **excellent mileage** in high scrub, urban metro conditions.

Low noise provides a quieter, **comfortable ride** for drivers and passengers.

**3 Peak Mountain Snowflake (3PMSF)** and **Mud & Snow (M+S)** designation for superior performance in **all weather conditions**.

**Durable casing** for premium retreadability.



### Key Features



EV Compatible 3PMSF Designation Mud + Snow Designation

### Compares to

Michelin: X<sup>®</sup> INCITY Z SL


### Product Data – Conti HAU 5

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, kPa)	LBS, PSI (KG, kPa)
305/85R22.5	J	05140840000 05655410000	24	68	20.1	510	42.8	1088	12.0	304	13.1	333	9.00, 8.25	13.5	343	483	300	143	65.1	7830, 120 (3550, 825)	7160, 120 (3250, 825)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Urban HA3

## All-Position

● GOODS ● PEOPLE ● CONSTRUCTION

**Increased sidewall gauge** for improved resistance against curbing, cuts and abrasions.


**Sidewall wear indicator** for visual cue to trigger rotation.

**All-season compounding** to deliver performance during any season.

**New urban tread compound** for prolonged mileage performance with excellent driving characteristics.

**Comfortable ride** for driver and passengers through extremely quiet running tread.

**Durable casing** for premium retreadability and enhanced mileage.



### Key Features



3PMSF Designation

M+S

Mud + Snow Designation

### Compares to

Michelin: X InCity Z

### Product Data - Conti Urban HA3


Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
305/70R22.5	L	05141330000 05656070000	23	68	18.6	473	39.9	1014	11.6	294	12.6	320	9.00, 8.25	13.5	343	519	322	130	59	8820, 123 (4000, 850)	8270, 123 (3750, 850)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.





# Conti HAU 3 WT

## Waste Transport All-Position


✓ GOODS ● PEOPLE ✓ CONSTRUCTION

**Four rib tread pattern** with zigzag groove geometry for resistance to high scrub applications.

**Innovative tread compound** for outstanding mileage and heat reduction.

**Improved bead design** for increased durability and resistance to brake heat.

**Extra sidewall protection** for better resistance to curbs, cuts and other sidewall abrasions.



### Key Features



Retread Available

### Compares to

Michelin: XZUS2 | Bridgestone: M870 | Goodyear: Endurance WHA


### Product Data - Conti HAU 3 WT

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
					TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																
315/80R22.5	L	05141090000 05652550000	26	68	20.0	507	43.1	1095	12.4	314	13.8	349	9.00, 8.25*	13.8	351	480	298	167	76	10200, 130 (4540, 900)	9090, 130 (4125, 900)

\*315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi in dual usage, and 8000 lbs at 120 psi in single usage.


■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

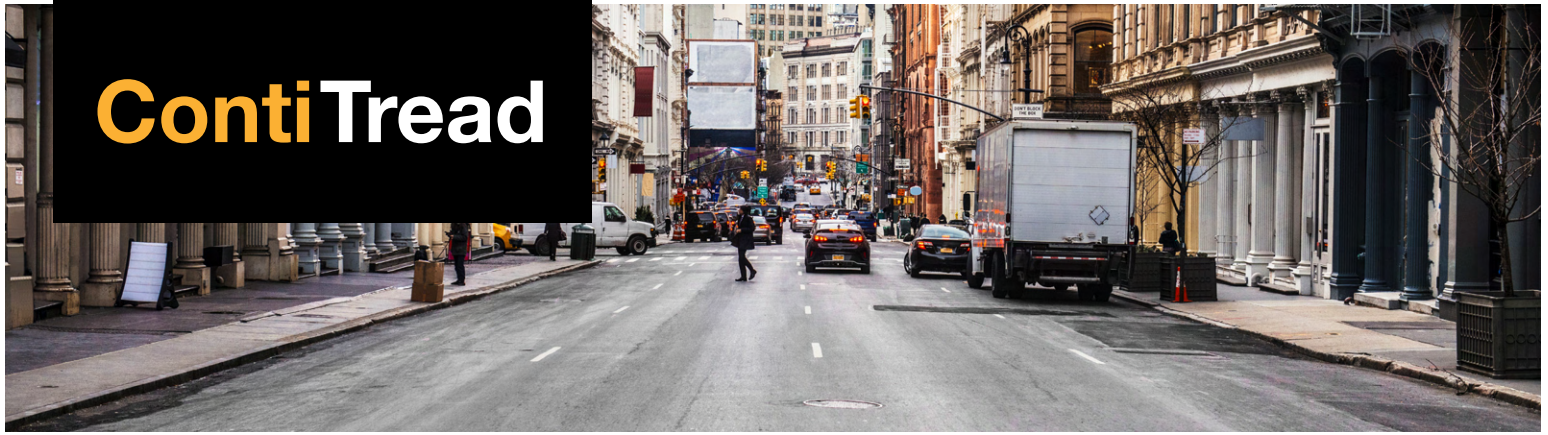

# Urban Retread Product Overview

## ContiTread HAU 3 WT Waste Transport All-Position



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18217910000	26
220	18217920000	26
230	18217930000	26
240	18217940000	26
250	18217950000	26
260	18217960000	26
270	18217970000	26
280	18217980000	26

- Optimized tread compound for long removal mileage and chip and chunk resistance.
- Robust four rib tread design for increased durability in high scrub applications.
- Zig-zag groove geometry engineered specifically for use in waste transportation.

## ContiTread HDU 3 WT Waste Transport Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18217990000	32
220	18218000000	32
230	18218010000	32
240	18218020000	32
250	18218030000	32
260	18218040000	32
270	18218050000	32

- Deep 32/32" tread depth and open shoulder tread design for excellent traction.
- Shoulder notches included in design to prevent heat build-up.
- Chip and chunk resistant compounding for endurance in waste and other high scrub applications.
- Tie bars included to improve wear mileage near end of life.

Legend:

SmartWay® Verified	New Tire Available

# Conti360°

## Continental's Fleet Services Web Portal

### Accounting **NEW FEATURES**

Easily print or save Continental invoices for commercial tires in PDF format, or download an Excel list of invoices and credits by date range. Financial statements are available for printing or saving, with options for last month's or real-time statements. New features include "Dispute Invoice" functionality and dealer Proof of Service Images. The dashboard now has improved delivery receipt capabilities, API monitoring, notification management, invoice pre-approval, and an enhanced D9 submission form.

### Accessibility

View the Dealer Locator to find your nearest servicing dealer. Log into your ContiConnect tire monitoring portal if you utilize Continental's digital tire monitoring solutions, such as the ContiConnect Yard Reader. Access business intelligence and tools to keep your fleet at maximum efficiency.

### Reporting

With Conti360°, you can gain insight into so many aspects of your fleet. From breakdown analysis to purchases to product performance, our reporting feature is designed to keep you in the know.

*Learn more about reporting below.*



### ContiACADEMY

Gain access to ContiAcademy, our virtual training platform to learn about Continental products, solutions, and live training opportunities.

### Ordering

Order Continental's Digital Solutions, including replacement parts, additional tire sensors, and more, directly from the Conti360° Fleet Portal.



**www.Conti360Fleet.com - Your 24/7 Business Solution**

**Conti360° Reporting is designed to keep fleets in the know:**

### TrukFix

If your fleet participates in Continental's TrukFix roadside breakdown assistance program, you will be able to generate a detailed report of breakdowns, causes, downtime, and more.

### ContiTrack2

ContiTrack2 digital tire inspections are performed by your Continental sales representative or dealer. Detailed reports on tire wear, tread depth, and recommendations to improve performance are available for viewing and printing.

### CLC-Soft

Fleets who use our Continental Retread Solutions Partners to retread their casings have the ability to track the progress of the retread. Different types of reports are available for a 360° view.

### Sales & Service

Within a specified time period, you have the ability to view product and digital solution purchases, as well as run reports of which services your dealer performed.



Superior Mileage // Durable Cut/Chip Compounding // Resistance to Stone Drilling // Optimal Retreadability

# Construction

## For Durability On-/Off-Road

CONSTRUCTION

**Engineered for your application.** Tires for Construction and On-/Off-Road use are designed for vocational applications such as utility trucks, concrete mixers, and dump trucks, etc., where they spend some time on the pavement but are also likely to encounter curbs, stones, debris, and tight turns. Tires are optimized for durability and traction, as well as minimal stone retention and cut-and-tear resistance.

**IMPORTANT NOTE:** Tire products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.

# Construction

## New Tire Product Overview



Conti HSC 3  
3G  



Conti HAC 3  




Conti HDC 3  
3G  



HDC1 HT  
3G 

Legend:

 3G Casing	 SmartWay® Verified	 Intelligent Tire	 Retread Available	 EV Compatible	 Other Sizes Available
--	---	---	--	--	--



# Conti HSC 3

## Steer/All-Position

✓ GOODS ● PEOPLE ✓ CONSTRUCTION

Trusted compound technology **delivers up to 10% cut and chip improvement** while maintaining mileage performance.

Built on the innovative **Continental 3G Casing** with premium off-road belt package for maximum retreadability and increased casing life.


**Self-cleaning tread design and groove geometry** for enhanced retreadability and traction.

**Maximum sidewall protection** for improved resistance against curbing, cuts and abrasions.

### Continental Intelligent Tire.

- Equipped with TPMS sensor for accurate, realtime tire pressure and temperature readings.
- Sensor warranted for 5 years to minimize disruptions.
- Sensor provides true casing temperature allowing preventive actions that make your tire last longer.
- Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at [www.continental-truck.com](http://www.continental-truck.com). See warranty policy for details.



### Key Features

**M+S**

Mud + Snow Designation



Intelligent Tire

**3G**

3G Casing



Retread Available

### Compares to

Michelin: X Works Z | Bridgestone: M853 | Goodyear: G751 MSA, Armor Max MSA

### Product Data – Conti HSC 3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single		Dual	
																				LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)		
11R22.5	H	05652440000	24	68	19.6	498	41.7	1060	11.7	297	12.7	322	8.25, 7.50	12.5	318	496	308	135	61	6610, 120 (3000, 830)	6005, 120 (2725, 830)		
11R22.5	H	05652460000	24	68	20.1	512	42.9	1090	11.8	301	13.0	329	9.00, 8.25	13.5	343	482	300	150	68	7390, 120 (3350, 830)	6780, 120 (2725, 830)		
315/80R22.5	L	05652480000	24	68	19.8	502	42.9	1089	12.5	318	13.8	351	9.00, 8.25*	13.8	351	483	300	162	74	10200, 130 (4625, 900)	9090, 130 (4125, 900)		
11R24.5	H	05652450000	24	68	20.6	523	43.9	1115	11.7	297	12.7	322	8.25, 7.50	12.5	318	472	293	144	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)		
12R24.5	H	05652470000	24	68	21.1	537	44.9	1141	12.0	305	14.5	368	9.00, 8.25	13.7	348	461	286	163	74	7830, 120 (3550, 830)	7160, 120 (3250, 830)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

\*315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi in dual usage, and 8000 lbs at 120 psi in single usage.

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

CONSTRUCTION



# Conti HAC 3

## All-Position

✓ GOODS ● PEOPLE ✓ CONSTRUCTION

Trusted compound technology **delivers up to 10% cut and chip improvement** while maintaining mileage performance.

**Self-cleaning tread design and groove geometry** for enhanced retreadability and traction.


**Rugged 4-belt** package resists impacts, bruises, and penetrations for improved casing durability.

**Increased sidewall gauge** for improved resistance against curbing, cuts, and abrasions.

### Continental Intelligent Tire.

- Equipped with TPMS sensor for accurate, realtime tire pressure and temperature readings.
- Sensor warranted for 5 years to minimize disruptions.
- Sensor provides true casing temperature allowing preventive actions that make your tire last longer.
- Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at [www.continental-truck.com](http://www.continental-truck.com). See warranty policy for details.

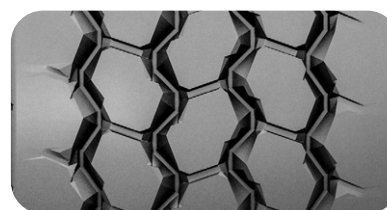

### Key Features



Intelligent Tire

**M+S**

Mud + Snow Designation

### Compares to

Michelin: XZY3 | Bridgestone: M864 | Goodyear: G296 MSA

## Product Data – Conti HAC 3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, kPa)		LBS, PSI (KG, kPa)																
385/65R22.5	L	05652000000	22	68	19.6	498	42.0	1067	14.8	376	15.9	404	11.75, 12.25	N/A	N/A	493	306	171	78	9920, 130 (4500, 900)	N/A		
425/65R22.5	L	05652010000	24	68	20.8	529	44.8	1138	16.6	421	17.9	454	13.00, 12.25, 14.00	N/A	N/A	462	287	190	86	11400, 120 (5150, 830)	N/A		
445/65R22.5	M	05652020000	23	68	20.9	531	45.2	1148	17.4	442	18.6	472	13.00, 14.00	N/A	N/A	458	285	210	95	12800, 130 (5800, 900)	N/A		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti HDC 3

## Drive

✔ GOODS ● PEOPLE ✔ CONSTRUCTION

Trusted compound technology **delivers up to 10% cut and chip improvement** while maintaining mileage performance.

**Wide, aggressive, open shoulder tread design with diamond shaped lugs** for excellent traction.

**Self-cleaning tread design and miniature stone bumpers** reduce stone retention for enhanced retreadability.

**Maximum sidewall protection** for improved resistance against curbing, cuts, and abrasions.

### Continental Intelligent Tire.

- Equipped with TPMS sensor for accurate, realtime tire pressure and temperature readings.
- Sensor warranted for 5 years to minimize disruptions.
- Sensor provides true casing temperature allowing preventive actions that make your tire last longer.
- Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at [www.continental-truck.com](http://www.continental-truck.com). See warranty policy for details.



### Key Features



Intelligent Tire



3G Casing



Mud + Snow Designation



Retread Available

### Compares to

Michelin: X Works D | Bridgestone: L320 | Goodyear: Armor Max Pro Grade MSD

### Product Data – Conti HDC 3


Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)										
11R22.5	H	05652410000	30	68	19.9	504	42.1	1069	11.7	298	12.7	322	8.25, 7.50	12.5	318	492	306	143	65	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05652430000	30	68	20.7	526	44.1	1120	11.7	298	12.8	324	8.25, 7.50	12.5	318	469	393	153	69	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.





# HDC1 HT

## High-Traction Drive


✔ GOODS ● PEOPLE ✔ CONSTRUCTION

**Rigid belt package** with full width top belt and extra sidewall protection for increased durability.

**Diamond shaped tread lug design** and shoulder notches are optimal for chaining.

**Alternating groove geometry** and stone bumper system for maximum stone ejection.

Built on the **Continental 3G Casing** for maximum retreadability.



### Key Features

**M+S**

Mud + Snow Designated

**3G**

3G Casing



Retread Available

### Compares to

Michelin: X Works Grip D | Bridgestone: M775

Goodyear: Armor Max ESD

### Product Data - HDC1 HT

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, kPa)		LBS, PSI (KG, kPa)														
11R22.5	H	05250950000	32	68	19.9	505	42.2	1072	11.6	295	13.0	330	8.25	12.5	318	491	305	136	62	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05250810000	32	68	20.7	526	44.2	1123	11.6	295	12.5	318	8.25	12.5	318	468	291	146	66	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS


■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.




# Construction

## Retread Product Overview




HSC 3  
⊙



HSC



HDC 3  
⊙





HDC1 HT



HTC1

Legend:

 SmartWay® Verified	 New Tire Available
---	---

## ContiTread HSC 3

Steer/All-Position




Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18215050000	24
220	18215060000	24
230	18215070000	24
240	18215080000	24

- Enhanced compound for improved mileage and chip and chunk resistance.
- Groove geometry reduces stone retention for enhanced retreadability.
- Rounded closed shoulder design to improve wear and optimize durability in multi-axle positions.

## ContiTread HSC

All-Position



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18205480000	18
225	18205490000	18
235	18205500000	18

- On-/Off-road compound increases resistance to cuts, chips and chunks. Also, reduces the number and depth of any cuts and tears.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

## ContiTread HDC 3

Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18215090000	28
220	18215100000	28
230	18215110000	28
240	18215120000	28
250	18215130000	28


- Diamond shaped lugs and optimal void volume for excellent traction.
- Open shoulder tread design for use in mud, gravel and dirt.
- Enhanced compound for improved mileage and chip and chunk resistance.
- Self-cleaning tread pattern and miniature stone bumpers reduce stone retention for enhanced retreadability.

Legend:

SmartWay® Verified	New Tire Available
--------------------	--------------------

# ContiTread HDC1 HT

## High Traction Drive



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
225	18211140000	32
235	18211150000	32

- Diamond shaped tread lug design and shoulder notches are optimal for chaining.
- Alternating groove geometry and stone bumper system for maximum stone ejection.
- Aggressive cut and chip resistant compounding to resist the most severe of applications.

# ContiTread HTC1

## Trailer



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
320	18219520000	24
350	18219530000	24
380	18219490000	23

- Aggressive multi-surface, all-position tread pattern provides excellent traction.
- Outstanding self-cleaning properties ensure a long service life.

Legend:

SmartWay® Verified	New Tire Available



# TrukFix Program with 360°Smart App For Emergency Roadside Assistance



## About the TrukFix Program

TrukFix is Continental's emergency roadside assistance program. It is available in the U.S. and Canada to qualified National Account customers, Premier Fleet members, and OOIDA members.

## Fulfilling Your Fleet Requirements

TrukFix can accommodate your fleet's emergency roadside assistance requirements. Share your preferences in advance via our online form, and TrukFix dispatchers will ensure that your needs are met. Tell us your tire/retread preferences, photo documentation requirements and more at [www.Continental-Tires.com/US/EN/B2B/Truck/Solutions/Fleet-Services/TrukFix-Roadside-Service/](http://www.Continental-Tires.com/US/EN/B2B/Truck/Solutions/Fleet-Services/TrukFix-Roadside-Service/).

## About the TrukFix Web App

**360°Smart for TrukFix** is a simple web app that enables the user to submit, process, and track TrukFix emergency roadside assistance requests in real-time.

It ties directly into systems used by TrukFix dispatchers, making information visible to:

- Continental TrukFix Dispatchers
- Fleet Managers
- Fleet Dispatchers
- Service Providers (Dealers)
- Drivers

Compatible with iOS and Android phones and tablets, along with desktop devices. Visit [www.Continental-Tires.com/US/EN/B2B/Truck/Solutions/Fleet-Services/TrukFix-Roadside-Service/](http://www.Continental-Tires.com/US/EN/B2B/Truck/Solutions/Fleet-Services/TrukFix-Roadside-Service/) to learn more about its features and benefits.

## Call 1-877-TRUKFIX - 24/7 Emergency Hotline



### Better Customer Service

- 24/7 access to professional North American dispatchers.
- Verified network of commercial dealers who stock Continental and General Tire products for roadside assistance.
- Request full service or simply locate the nearest dealer.



### Better Communication

- Real-time tracking of the incident until trucks are back on the road.
- Follow-up by our dispatchers ensures your repairs are completed.
- Service case history reporting, complete with failure photos.



### Better Pricing

- No enrollment or membership fee - pay for services as they are used.
- Regulated, predictable pricing as a published tire and service program.
- Simple, convenient billing through our National Account invoicing system.

TrukFix Emergency Roadside Assistance Program | Call 1-877-TrukFix

# HORSEPOWER

untamed

## Continental's Loyalty Rewards Program

A dealer sales incentive program to sell Continental Tire, General Tire and ContiTread products.

### Eligible Products:

Continental Tires, Continental Intelligent Tires, General Tires, ContiTread



**Enroll today! Contact your Continental Representative to learn more!**



#### Some Sweet Rewards For You

Sell tires. Collect points.  
Earn rewards. Repeat.  
Choose from an extensive collection of name-brand apparel, cash gift cards and more.



#### We Value Your Loyalty

We appreciate your loyalty and now allow us to return the favor.



#### Earning Points is Easy

Once enrolled, you'll have 45 days from the invoice date to submit tire sales. Simply login and use the Claims Page to upload invoices and submit claims. Points will be deposited into your account upon claim approval.

HorsePower Untamed is available by invitation only to a select group of individual salespeople selling to fleets and users directly. No wholesale or intercompany transfers are permitted in this program. No sales may be aggregated; but must be solely the reporting participant's sales. Any tax liability is the individual's responsibility. A valid individual W-9 tax form including your SSN (not a company tax ID) must be on file with Continental to redeem in the program. As well as TD1 form for Canadian participants. Aggregation of points over groups of salesman and/or tax information that is of a business nature will not be permitted. Owners and dealer principals are not eligible to participate in this program.



Excellent Traction // Hours of Service // Cut/Tear Resistant // Casing Durability

# Off-Road

## For Severe Service & Maximum Durability

**Engineered for your application.** Tires for Off-Road and Severe Service use are designed to support construction, mining, logging, and other applications where vehicles travel across challenging surfaces strewn with rocks, nails, and debris. Tires are optimized for durability and high removal mileage, as well as cut-and-tear resistance and traction.

**IMPORTANT NOTE:** Tire products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.

# Off-Road

## New Tire Product Overview



HCS



Conti Terra HD3 (19.5")

Legend:



3G Casing



SmartWay® Verified



Intelligent Tire



Retread Available



EV Compatible



Other Sizes Available





# HCS

## Severe Service All-Position

✓ GOODS ● PEOPLE ✓ CONSTRUCTION

High operational safety, long lasting service and **outstanding resistance to damage through compounds** with extreme resistance to cuts and tears.

Outstanding traction, even in harshest terrain, thanks to **tread pattern structure and geometry.**

**Most durable casing design** for maximum service life in demanding off-road use, also involving heavy-duty vehicles.



### Key Features

**M+S**



Mud + Snow Designation Retread Available

### Compares to

Michelin: XZL, XZL+ | Bridgestone: L315 | Goodyear: G278 MSD

### Product Data - HCS

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
445/65R22.5	L	05160660000 05653580000	27	68	20.9	532	45.5	1156	17.7	449	19.0	482	13.00, 14.00	N/A	N/A	462	287	207	94	12800, 130 (5800, 900)	N/A
325/95R24 (NHS)	H	05160340000	40	50	22.4	568	49.3	1252	12.8	325	13.1	332	8.50, 9.00	14.2	360	430	267	204	92	9370, 120 (4250, 830)	8540, 120 (3875, 830)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: NHS - Not for Highway Use. Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice.

# - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations.

Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



# Conti Terra HD3

## 19.5" Drive

✓ GOODS ● PEOPLE ✓ CONSTRUCTION

**Aggressive 19/32" open shoulder tread design** provides outstanding traction in off-road conditions.

Technologically **advanced cut/tear resistant tread compound** to provide long removal miles.

**Circumferential protection rib** engineered to withstand severe off road terrain.

**Scuff rib** to protect against curbing, cuts and abrasions.


**Mud & Snow (M+S)** designation.



### Key Features

**M+S**

Mud + Snow Designation




### Product Data - Conti Terra HD3

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
225/70R19.5	G	05260080000	19	75	15.4	390	32.3	813	8.6	218	9.3	239	6.00, 6.75	10.0	254	640	398	67	30	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5	H	05260070000	19	75	15.6	395	33.3	845	9.7	245	10.3	262	7.50, 6.75	11.0	279	622	387	82	37	4940, 120 (2240, 830)	4675, 120 (2120, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE ■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

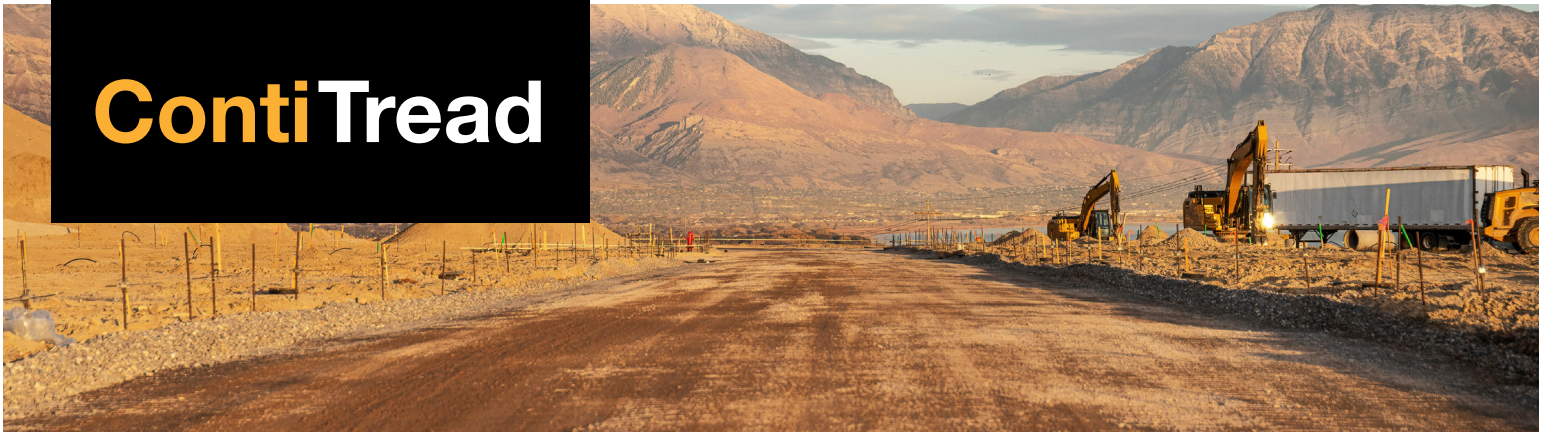

# Off-Road Retread Product Overview

## ContiTread HCS



Severe Service All-Position



Product Data		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18213510000	32
225	18213520000	32
235	18213530000	32
245	18213540000	32
360	18213550000	32
380	18213560000	32

- Cut and tear resistant tread compound for long tread life in on-/off-road conditions.
- Outstanding self-cleaning properties ensure a long service life.
- Aggressive tread pattern provides excellent traction.

Legend:

	
SmartWay® Verified	New Tire Available




SCAN HERE!

# Digital Tire Monitoring for Truck + Trailer, Truck, or Bus.

Anytime. Anywhere.



Tire Sensor



Truck GPS  
Receiver



ALWAYS  
INFORMED

## ContiConnect LIVE

Truck + Trailer, Truck, or Bus Solution


### Key Features



Digital tire monitoring  
available anytime, anywhere



Immediate actionable insights  
via phone, tablet and web portal



Real-time alerts for both slow  
and fast tire leaks

DIGITAL SOLUTIONS

**ContiConnect LIVE Truck + Trailer, Truck, or Bus** is the perfect solution to monitor your tires at all times. The web portal and mobile app give you around-the-clock access to critical tire data like GPS location, over and under inflation, rapid pressure loss, slow tire leaks, temperature, and even mileage. This gives your fleet the ultimate advantage of actionable insights towards extended tire life, reduced roadside breakdowns, improved fuel consumption and consequently Lowest Overall Driving Cost.

Scan the QR code or contact your Continental representative for more information!

**Need a Representative?** Call us at 1 (800) 450-3187.




SCAN HERE!

# Remote Trailer & Tire Monitoring.

Even when disconnected from a power unit.



Tire Sensor



Trailer GPS Receiver



ALWAYS INFORMED

## ContiConnect LIVE

Standalone Trailer Solution

### Key Features



**Tire monitoring alerts even when not connected to a power unit**



**Know the status of any and all tire positions anytime, anywhere**



**GPS location whether the trailer is on the road or awaiting pickup**

The ideal solution for any fleet frequently dropping trailers at various locations, giving you 24/7 access to valuable data like GPS location, over and under inflation, rapid pressure loss, slow tire leaks, temperature, and even mileage - **all without having to be connected to a direct power source.** Our web portal and mobile app offer added convenience with daily notifications on the status of your trailers. Get more miles out of your tires, maximize your fleet's uptime and reduce your number of emergency roadside services with the all-new **ContiConnect LIVE Trailer Solution.**

Scan the QR code or contact your Continental representative for more information!  
**Need a representative?** Call us at 1 (800) 450-3187.



SCAN HERE!

# Reduce Breakdowns. Increase Tire Life.

Digital Tire Monitoring  
Fit for Any Fleet.



Tire Sensor



ContiConnect Yard



ALWAYS INFORMED

## ContiConnect Yard

Home Fleet Solution

### Key Features



**Real time tire alerts when vehicle is within range of the ContiConnect™ Yard**



**Digital tire monitoring for the entire fleet with just one device**

**ContiConnect Yard** - the digital tire monitoring service designed to help centrally located fleets monitor their tires at regular intervals. The Yard reader device can be mounted stationary or mobile on a service truck or van, providing flexibility for many applications. Once active, the data collected from your tire sensors offers actionable insights to reduce tire failures, improve safety performance on the road and extend life of tires, resulting in significant savings for any fleet that regularly returns to dedicated checkpoints.

Scan the QR code or contact your Continental representative for more information!

**Need a Representative?** Call us at 1 (800) 450-3187.

# **TABLES/CHARTS** & Tire Information

# Medium Truck Load/ Inflation Tables

## Safety Warning

---

### Serious Injury May Result From:

- Explosion of tire/rim assembly due to improper mounting. Use safety cage and clip-on extension air hose. Only specially trained persons should mount tires.
- Tire failure due to misapplication/improper inflation/overloading.

***Follow tire manufacturer's instructions.***

***Check inflation pressure frequently with calibrated gauge.***



# Truck and Bus Tires

## Normal and Wide-Base Sizes on 5 Degree or Flat-Based Rims - Radial Ply

Tire Loads Limits at Various Cold Inflation Pressures

24"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
325/95R24	*	dual	kg	2780	2860	3020	3140	3250	3350	3450	3550	3650	3760	<b>3875 (J)</b>
			lbs	6120	6390	6650	6910	7160	7390	7610	7830	8050	8300	<b>8540 (J)</b>
	single	kg	2870	3020	3170	3300	3440	3650	3770	3890	4000	4130	<b>4250 (J)</b>	
		lbs	6330	6660	6980	7280	7580	8050	8310	8570	8820	9100	<b>9370 (J)</b>	

## Conventional Sizes on 15 Degree Drop-Center Rims - Radial Ply

22.5"			kPa	480	520	550	590	620	660	690	720	760	790	825/830***
			psi	70	75	80	85	90	95	100	105	110	115	120
10R22.5	*	dual	kg	1750	1830	1910	2000	2080	2160	2240	2300	2360	<b>2430 (G)</b>	--
			lbs	3860	4045	4230	4410	4585	4760	4940	5075	5210	<b>5355 (G)</b>	--
	single	kg	1850	1940	2030	2120	2200	2280	2360	2430	2500	<b>2575 (G)</b>	--	
		lbs	4080	4280	4480	4675	4850	5025	5205	5360	5515	<b>5675 (G)</b>	--	
11R22.5	*	dual	kg	1990	2080	2160	2250	2360	2460	2560	<b>2650 (G)</b>	2680	2710	<b>2725 (H)</b>
			lbs	4380	4580	4760	4950	5205	5415	5625	<b>5840 (G)</b>	5895	5950	<b>6005 (H)</b>
	single	kg	2050	2160	2260	2370	2500	2600	2700	<b>2800 (G)</b>	2870	2940	<b>3000 (H)</b>	
		lbs	4530	4770	4990	5220	5510	5730	5950	<b>6175 (G)</b>	6320	6465	<b>6610 (H)</b>	
12R22.5	*	dual	kg	2170	2260	2350	2440	2575	2630	2680	<b>2725 (G)</b>	2840	2960	<b>3075 (H)</b>
			lbs	4780	4990	5190	5390	5675	5785	5895	<b>6005 (G)</b>	6265	6525	<b>6780 (H)</b>
	single	kg	2240	2360	2470	2580	2725	2820	2910	<b>3000 (G)</b>	3120	3240	<b>3350 (H)</b>	
		lbs	4940	5200	5450	5690	6005	6205	6405	<b>6610 (G)</b>	6870	7130	<b>7390 (H)</b>	

24.5"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
11R24.5	*	dual	kg	2110	2210	2300	2390	2500	2580	2660	<b>2725 (G)</b>	2820	2910	<b>3000 (H)</b>
			lbs	4660	4870	5070	5260	5510	5675	5840	<b>6005 (G)</b>	6205	6405	<b>6610 (H)</b>
	single	kg	2190	2300	2410	2520	2650	2770	2890	<b>3000 (G)</b>	3080	3160	<b>3250 (H)</b>	
		lbs	4820	5070	5310	5550	5840	6095	6350	<b>6610 (G)</b>	6790	6970	<b>7160 (H)</b>	
12R24.5	*	dual	kg	2300	2400	2500	2600	2650	2770	2890	<b>3000 (G)</b>	3080	3160	<b>3250 (H)</b>
			lbs	5080	5300	5520	5730	5840	6095	6350	<b>6610 (G)</b>	6790	6970	<b>7160 (H)</b>
	single	kg	2380	2500	2630	2740	2900	3020	3140	<b>3250 (G)</b>	3350	3450	<b>3550 (H)</b>	
		lbs	5240	5520	5790	6040	6395	6650	6910	<b>7160 (G)</b>	7380	7600	<b>7830 (H)</b>	

\* Based on TRA | \*\* Based On ETRTO

\*\*\* Tire & Rim Association has adopted an official equivalency of kPa to psi values. 825 replaces the previous 830.

NOTE: Letters in parentheses denote load range for which boldface loads are maximum.

CAUTION: Always use approved tire and rim combinations for diameters and contours.

NOTE: All values are for 65 mph unless otherwise noted, for tire load and inflation at various speeds, see next pages.

TIRE INFORMATION

# Truck and Bus Tires

## Metric and Wide-Base Sizes on 15 Degree Drop-Center Rims - Radial Ply

Tire Loads Limits at Various Cold Inflation Pressures

16"				kPa	240	280	310	340	380	410	450	480	520	550	650		
				psi	35	40	45	50	55	60	65	70	75	80	95		
LT225/75R16	**	Dual	kg	635	675	725	800 (C)	845	885	975 (D)	1000	1040	1120 (E)	1250 (F)			
			lbs	1365	1500	1630	1765 (C)	1875	1995	2150 (D)	2220	2330	2470 (E)	2755 (F)			
LT235/85R16	**	Dual	kg	720	770	835	910 (C)	960	1025	1080 (D)	1140	1200	1260 (E)	1400 (F)			
			lbs	1545	1700	1845	2006 (C)	2125	2260	2381 (D)	2515	2645	2778 (E)	3085 (F)			
LT245/75R16	**	Dual	kg	720	770	835	910 (C)	960	1020	1080 (D)	1140	1195	1260 (E)	1400 (F)			
			lbs	1545	1700	1845	2006 (C)	2125	2255	2381 (D)	2515	2640	2778 (E)	3085 (F)			
		Single	kg	680	745	795	880 (C)	930	970	1060 (D)	1100	1140	1215 (E)	1360 (F)			
			lbs	1500	1650	1790	1940 (C)	2060	2190	2335 (D)	2440	2560	2680 (E)	3000 (F)			
		Single	kg	770	845	920	1000 (C)	1055	1125	1190 (D)	1250	1315	1380 (E)	1550 (F)			
			lbs	1700	1870	2030	2205 (C)	2335	2485	2623 (D)	2765	2905	3042 (E)	3415 (F)			
		Single	kg	770	845	920	1000 (C)	1055	1125	1190 (D)	1250	1315	1380 (E)	1550 (F)			
			lbs	1700	1870	2030	2205 (C)	2335	2480	2623 (D)	2765	2900	3042 (F)	3415 (F)			
17.5"				kPa	480	520	550	590	620	660	690	720	760	790	830	860	
				psi	70	75	80	85	90	95	100	105	110	115	120	125	
215/75R17.5	**	Dual	kg	--	--	1450	1520	1590	1650	1720	1790	1860	1925	1990	2060 (H)		
			lbs	--	--	3195	3500	3500	3645	3795	3945	4095	4245	4390	4545 (H)		
235/75R17.5	**	Dual	kg	--	--	--	--	--	2020	2140	2200	2325	2380	2440	2575 (J)		
			lbs	--	--	--	--	--	4450	4720	4855	5120	5250	5380	5675 (J)		
245/70R17.5	**	Dual	kg	--	--	--	--	--	2020	2140	2200	2325	2380	2440	2575 (J)		
			lbs	--	--	--	--	--	4450	4720	4855	5120	5250	5380	5675 (J)		
		Single	kg	--	--	--	--	--	2080	2205	2270	2395	2455	2515	2725 (J)		
			lbs	--	--	--	--	--	4580	4860	5000	5275	5410	5545	6005 (J)		
		Single	kg	--	--	--	--	--	2080	2205	2270	2395	2455	2515	2725 (J)		
			lbs	--	--	--	--	--	4580	4860	5000	5275	5410	5545	6005 (J)		
19.5"				kPa	480	520	550	590	620	660	690	720	760	790	830	860	900
				psi	70	75	80	85	90	95	100	105	110	115	120	125	130
225/70R19.5	*	Dual	kg	1230	1300	1360	1410	1470	1550	1580	1640	1700 (G)	1750	1800 (H)	1850	1900 (J)	
			lbs	2720	2860	3000	3115	3245	3415	3490	3615	3750 (G)	3855	3970 (H)	4085	4190 (J)	
245/70R19.5	*	Dual	kg	--	--	1550	1590	1660	1750	1790	1850	1950 (G)	--	--	--	--	
			lbs	--	--	3415	3515	3655	3860	3940	4075	4410 (G)	--	--	--	--	
245/70R19.5 (LRH Only)	*	Dual	kg	--	--	1550	1590	1660	1750	1790	1850	1950	1970	2060 (H)	--	--	
			lbs	--	--	3415	3515	3655	3860	3940	4075	4300	4345	4540 (H)	--	--	
265/70R19.5 @81 mph	**	Dual	kg	1560	1640	1700	1780	1860	1950	2000	2000	2120	2360 (H)	--	--	--	
			lbs	3430	3600	3750	3930	4095	4300	4405	4415	4675	5205 (H)	--	--	--	
285/70R19.5 LRH @ 81 mph	**	Dual	kg	--	1870	1970	2065	2160	2260	2355	2450	2540	2630	2725 (H)	--	--	
			lbs	--	4125	4340	4555	4770	4980	5190	5395	5600	5805	6005 (H)	--	--	
285/70R19.5 LRJ @ 68 mph	**	Dual	kg	--	1990	2100	2200	2305	2405	2505	2605	2705	2805	2900 (H)	--	--	
			lbs	--	4390	4625	4855	5080	5305	5525	5745	5965	6180	6395 (H)	--	--	
305/70R19.5	*	Dual	kg	--	--	2060	2120	2200	2300	2370	2450	2575	2620	2725	2900 (J)	--	
			lbs	--	--	4540	4670	4860	5070	5230	5410	5675	5770	6005	6395 (J)	--	
		Single	kg	--	--	2240	2330	2420	2500	2610	2700	2800	2870	3000	3150 (J)	--	
			lbs	--	--	4940	5130	5340	5510	5745	5945	6175	6340	6610	6940 (J)	--	

TABLES / CHARTS

22.5"			kPa	480	520	550	590	620	660	690	720	760	790	825/830***	860	900
			psi	70	75	80	85	90	95	100	105	110	115	120	125	130
255/70R22.5	*	Dual	kg	--	--	1800	1860	1940	2000	2020	2090	2120	2230	<b>2300 (H)</b>	--	--
		lbs	--	--	3970	4110	4275	4410	4455	4610	4675	4915	<b>5070 (H)</b>	--	--	
		Single	kg	--	--	1900	1980	2060	2120	2220	2300	2360	2450	<b>2500 (H)</b>	--	--
		lbs	--	--	4190	4370	4550	4675	4895	5065	5205	5400	<b>5510 (H)</b>	--	--	
275/70R22.5	**	Dual	kg	--	--	--	2070	2155	2265	2345	2424	2535	2615	2720	2795	<b>2900 (J)</b>
		lbs	--	--	--	4565	4750	4995	5170	5345	5590	5765	5995	6160	<b>6395 (J)</b>	
		Single	kg	--	--	--	2250	2340	2460	2550	2635	2750	2840	2955	3040	<b>3150 (J)</b>
		lbs	--	--	--	4960	5160	5420	5620	5810	6060	6260	6510	6700	<b>6940 (J)</b>	
275/80R22.5	**	Dual	kg	1860	1950	2060	2130	2220	2300	2390	2470	<b>2575 (G)</b>	2630	<b>2800 (H)</b>	--	--
		lbs	4095	4300	4540	4690	4885	5070	5260	5440	<b>5675 (G)</b>	5795	<b>6175 (H)</b>	--	--	
		Single	kg	2040	2140	2240	2340	2440	2500	2620	2710	<b>2800 (G)</b>	2890	<b>3150 (H)</b>	--	--
		lbs	4500	4725	4940	5155	5370	5510	5780	5980	<b>6175 (G)</b>	6370	<b>6940 (H)</b>	--	--	
295/60R22.5 9.00" wheel @ 65mph	**	Dual	kg	--	--	--	2187	2290	2392	2492	2592	2690	2787	2885	2970	<b>3075 (J)</b>
		lbs	--	--	--	4825	5050	5275	5495	5715	5930	6145	6360	6570	<b>6780 (J)</b>	
		Single	kg	--	--	--	2385	2495	2610	2715	2825	2930	3040	3145	3230	<b>3350 (J)</b>
		lbs	--	--	--	5260	5505	5750	5990	6230	6465	6700	6930	7160	<b>7390 (J)</b>	
295/60R22.5 9.00" wheel @ 75mph	**	Dual	kg	--	--	--	--	2187	2290	2392	2492	2592	2690	2787	2885	<b>2970 (J)</b>
		lbs	--	--	--	--	4825	5050	5275	5495	5715	5930	6145	6360	<b>6570 (J)</b>	
		Single	kg	--	--	--	--	2385	2495	2610	2715	2825	2930	3040	3145	<b>3230 (J)</b>
		lbs	--	--	--	--	5260	5505	5750	5990	6230	6465	6700	6930	<b>7160 (J)</b>	
295/75R22.5	*	Dual	kg	1860	1950	2060	2130	2220	2300	2390	2470	<b>2575 (G)</b>	2630	<b>2725 (H)</b>	--	--
		lbs	4095	4300	4540	4690	4885	5070	5260	5440	<b>5675 (G)</b>	5795	<b>6005 (H)</b>	--	--	
		Single	kg	2040	2140	2240	2340	2440	2500	2620	2710	<b>2800 (G)</b>	2890	<b>3000 (H)</b>	--	--
		lbs	4500	4725	4940	5155	5370	5510	5780	5980	<b>6175 (G)</b>	6370	<b>6610 (H)</b>	--	--	
295/80R22.5	**	Dual	kg	2050	2160	2260	2370	2500	2600	2700	2800	2910	3030	<b>3150 (H)</b>	--	--
		lbs	4530	4770	4990	5220	5510	5730	5950	6175	6415	6670	<b>6945 (H)</b>	--	--	
		Single	kg	2380	2500	2630	2740	2900	3020	3140	3250	3350	3450	<b>3550 (H)</b>	--	--
		lbs	5240	5520	5790	6040	6395	6650	6910	7160	7380	7600	<b>7830 (H)</b>	--	--	
305/70R22.5	**	Dual	kg	1915	2020	2130	2235	2340	2445	2545	2645	2745	2845	2945	<b>3150 (L)</b>	--
		lbs	4220	4450	4700	4930	5160	5390	5610	5830	6050	6270	6490	<b>6940 (L)</b>	--	
		Single	kg	2155	2280	2400	2520	2635	2755	2870	2985	3095	3210	3320	3430	<b>3550 (L)</b>
		lbs	4750	5030	5290	5560	5810	6070	6330	6580	6820	7080	7320	7560	<b>7830 (L)</b>	
315/80R22.5	*	Dual	kg	--	--	2575	2650	2750	2900	2970	3070	3150	3270	3450	3600	<b>3750 (L)</b>
		lbs	--	--	5675	5840	6070	6395	6545	6770	6940	7210	7610	7940	<b>8270 (L)</b>	
		Single	kg	--	--	2800	2910	3030	3150	3260	3370	3450	3590	3750	3960	<b>4125 (L)</b>
		lbs	--	--	6175	6415	6670	6940	7190	7440	7610	7920	8270	8600	<b>9090 (L)</b>	
315/80R22.5** speed restricted LRL	**	Dual	kg	--	--	2800	2910	3030	3150	3260	3370	3450	3590	3750	3940	<b>4125 (L)</b>
		lbs	--	--	6175	6415	6670	6940	7190	7440	7610	7920	8270	8680	<b>9090 (L)</b>	
		Single	kg	--	--	3050	3170	3300	3430	3550	3670	3760	3910	4125	4330	<b>4540 (L)</b>
		lbs	--	--	6725	6990	7275	7560	7825	8090	8290	8620	9090	9545	<b>10000 (L)</b>	
385/65R22.5	**	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
		lbs	--	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	2880	3060	3150	3350	3470	3650	3740	3850	4000	4100	4250	4360	<b>4500 (L)</b>
		lbs	6380	6720	6940	7350	7650	8050	8230	8510	8820	9050	9370	9610	<b>9920 (L)</b>	
425/65R22.5	**	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
		lbs	--	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	3430	3640	3750	3980	4130	4250	4440	4580	4750	4880	<b>5150 (L)</b>	--	--
		lbs	7590	7990	8270	8740	9100	9370	9790	10100	10500	10700	<b>11400 (L)</b>	--	--	
445/50R22.5	*	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
		lbs	--	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	--	3150	3320	3480	3640	3810	3970	4120	4250	4430	<b>4625 (L)</b>	--	--
		lbs	--	6940	7310	7680	8030	8390	8740	9090	9370	9780	<b>10200 (L)</b>	--	--	
445/65R22.5	*	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
		lbs	--	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	3720	3950	4125	4320	4470	4625	4820	4960	5150	5290	<b>5600 (L)</b>	--	<b>5800 (M)</b>
		lbs	8230	8660	9090	9480	9870	10200	10600	11000	11400	11700	<b>12300 (L)</b>	--	<b>12800 (M)</b>	

24.5"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
285/75R24.5	*	Dual	kg	1870	1970	2060	2150	2240	2360	2410	2490	<b>2575 (G)</b>	2660	<b>2800 (H)</b>
		lbs	4135	4340	4540	4740	4930	5205	5310	5495	<b>5675 (G)</b>	5860	<b>6175 (H)</b>	
		Single	kg	2060	2160	2240	2360	2460	2575	2650	2740	<b>2800 (G)</b>	2920	<b>3075 (H)</b>
		lbs	4545	4770	4940	5210	5420	5675	5835	6040	<b>6175 (G)</b>	6440	<b>6780 (H)</b>	

\* Based on TRA | \*\* Based On ETRTO

\*\*\* Tire & Rim Association has adopted an official equivalency of kPa to psi values. 825 replaces the previous 830.

NOTE: Letters in parentheses denote load range for which boldface loads are maximum.

# Load Limits At Various Speeds

## For Radial Ply Truck Tires Used On Improved Surfaces

(These Tables apply to tires only. Consult rim/wheel manufacturer for rim/wheel load and inflation capacities.)

### Tire And Rim Association Standard

#### FOR METRIC AND WIDE BASE TIRES

The service load and minimum (Cold) inflation must comply with the following limitations unless a speed restriction is indicated on the tire or the manufacturer rates the tire at 75 mph or above.

SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	+5 psi	-12%
66 thru 70	+5 psi	-4%
51 thru 65	No Increase	None
41 thru 50	No Increase	+7%
31 thru 40	No Increase	+9%
21 thru 30	+10 psi	+12%
11 thru 20	+15 psi	+17%
6 thru 10	+20 psi	+25%
2.6 thru 5	+20 psi	+45%
Creep thru 2.5	+20 psi	+55%
Creep (2)	+30 psi	+75%
Stationary	+30 psi	+105%

#### FOR CONVENTIONAL TIRES

The service load and minimum (Cold) inflation must comply with the following limitations unless a speed restriction is indicated on the tire or the manufacturer rates the tire at 75 mph or above.

SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	+5 psi	-12%
66 thru 70	+5 psi	-4%
51 thru 65	No Increase	None
41 thru 50	No Increase	+9%
31 thru 40	No Increase	+16%
21 thru 30	+10 psi	+24%
11 thru 20	+15 psi	+32%
6 thru 10 (1)	+30 psi	+60%
2.6 thru 5 (1)	+30 psi	+85%
Creep thru 2.5 (1)	+30 psi	+115%
Creep (1) (2)	+40 psi	+140%
Stationary (1)	+40 psi	+185%

#### NOTES

1. Apply these increases to Dual Loads and Inflation Pressures.
2. Creep - Motion for not over 200 feet in a 30-minutes period.

**Note 1:** The inflation pressures shown in the minimum cold pressures for the various loads listed.

**Higher pressures should be used as follows:**

- A. When required by the above speed/load table.
- B. When higher pressures are desirable to obtain improved operating performance. For speeds above 20 mph, the combined increases of A and B should not exceed 20 psi above the inflation specified for the maximum load of the tire.

**Note 2:** Load limits at various speed for:  
 Tires used in highway service at Restricted Speed.  
 Mining and Logging Tires used in Intermittent Highway Service.

THE MAXIMUM LOAD AND INFLATION CAPACITY OF THE RIM MUST NOT BE EXCEEDED.

# Load Limits At Various Speeds

## Tires Rated At 75 MPH And Radial Ply Truck Tires Used On Improved Surfaces

(These tables apply to tires only. Consult rim/wheel manufacturer for rim/wheel load and inflation capacities.)

### Tire And Rim Association Standard

FOR METRIC AND WIDE BASE TIRES		
SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	No Increase	None
66 thru 70	No Increase	None
51 thru 65	No Increase	None
41 thru 50	No Increase	+7%
31 thru 40	No Increase	+9%
21 thru 30	+10 psi	+12%
11 thru 20	+15 psi	+17%
6 thru 10	+20 psi	+25%
2.6 thru 5	+20 psi	+45%
Creep thru 2.5	+20 psi	+55%
Creep (2)	+30 psi	+75%
Stationary	+30 psi	+105%

FOR CONVENTIONAL TIRES		
SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	No Increase	None
66 thru 70	No Increase	None
51 thru 65	No Increase	None
41 thru 50	No Increase	+9%
31 thru 40	No Increase	+16%
21 thru 30	+10 psi	+24%
11 thru 20	+15 psi	+32%
6 thru 10 (1)	+30 psi	+60%
2.6 thru 5 (1)	+30 psi	+85%
Creep thru 2.5 (1)	+30 psi	+115%
Creep (1) (2)	+40 psi	+140%
Stationary (1)	+40 psi	+185%

#### NOTES

1. Apply these increases to Dual Loads and Inflation Pressures.
2. Creep - Motion for not over 200 feet in a 30-minutes period.

**Note 1:** The inflation pressures shown in the minimum cold pressures for the various loads listed.


**Higher pressures should be used as follows:**

- A. When required by the above speed/load table.
- B. When higher pressures are desirable to obtain improved operating performance. For speeds above 20 mph, the combined increases of A and B should not exceed 20 psi above the inflation specified for the maximum load of the tire.

THE MAXIMUM LOAD AND INFLATION CAPACITY OF THE RIM MUST NOT BE EXCEEDED.

# Reading Tire Information

## Tire Sidewall

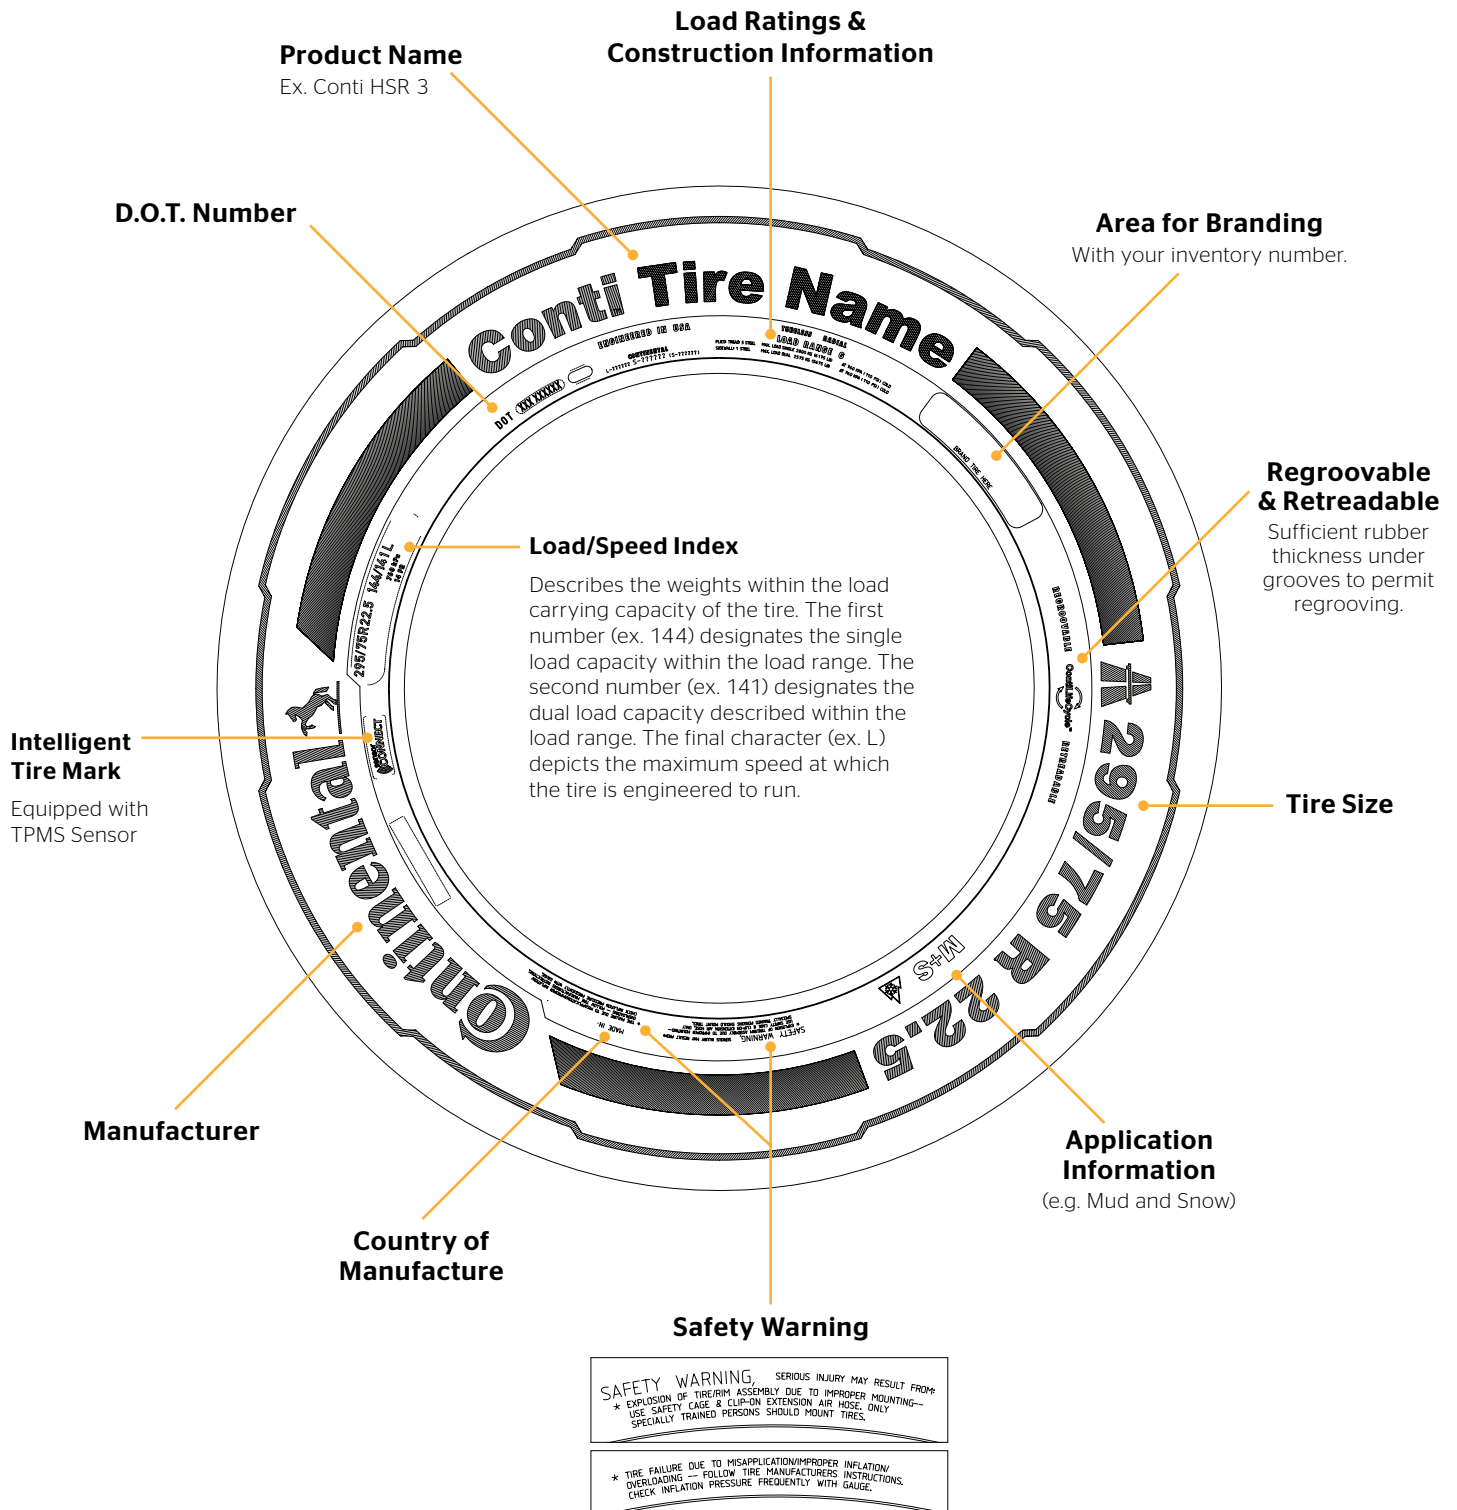


# Reading Tire Information

## DOT Code


### CURRENT

*Before April 13th, 2025*

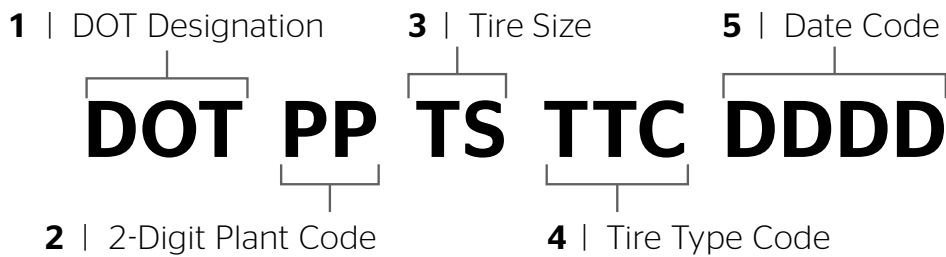

### UPDATED

*After April 13th, 2025*

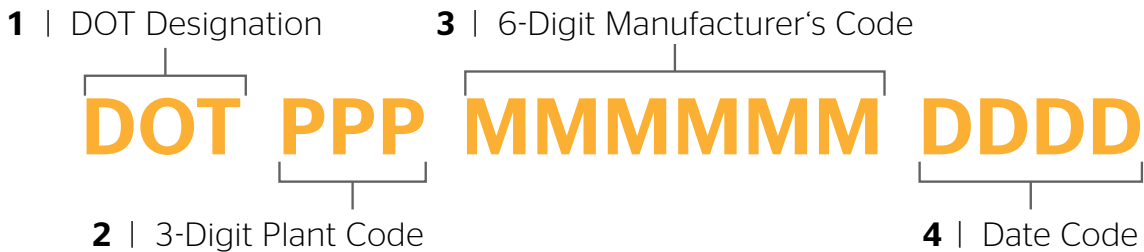

## Key Changes


NHTSA introduced a new TIN (Tire Identification Number) standard called "DOT3", which replaces the existing "DOT2" Standard. Compliance with the new standard is mandatory for all tires from April 13th, 2025.

Key changes introduced with DOT3 are:

- Change over from 2-digit to **3-digit Plant code**.
- Tire Size Code and Tire Type Code replaced by a **6-digit Manufacturer's code**.

# Reading Tire Information

## New Generation Product Naming

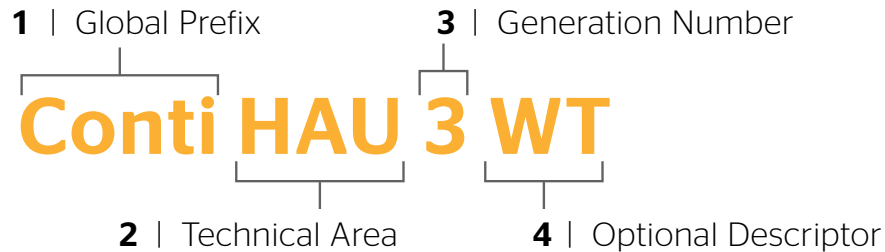

### Step 1


#### Global Prefix

Moving forward, every new tire will begin with Conti (or ContiTread™ for retread), regardless of segment, region, or application. This universal prefix will help unify our diverse product line.

### Step 2

#### Technical Area

This area provides essential information to help ensure the right tire goes on the right vehicle.

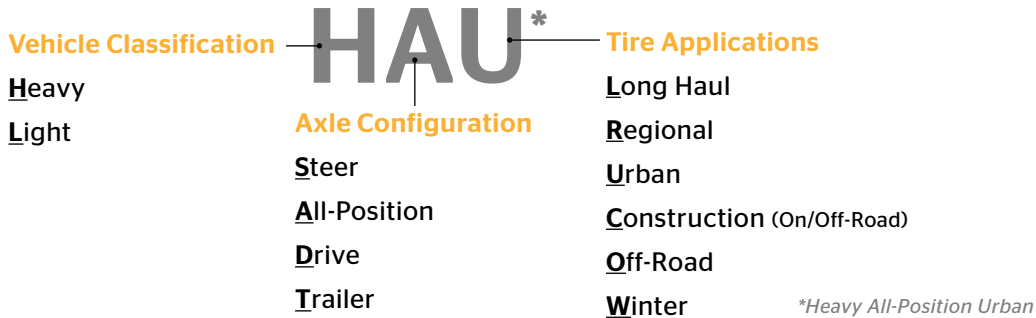

### Step 3

#### Generation Number (1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup>, 5<sup>th</sup>, etc.)

### Step 4

#### Optional Descriptor

Although it may be left blank, this space covers additional information about a tire's specialized characteristics to help our customers find the optimal tire.

**EP** Eco Plus | **DL** Deep Lug | **WT** Waste Transport | **& more...**

**PLEASE NOTE:** If these two characters are included, they are part of the tire name and essential to its identification. For example, a **Conti HSL 3** and a **Conti HSL 3 EP** could both exist, and would be two entirely different tires with different tread patterns, article numbers, and benefits.



**Example 1: Conti HSL 3**

Heavy Vehicle / Steer Axle / Long Haul Application (3<sup>rd</sup> Generation)





**Example 2: Conti HSR 3**

Heavy Vehicle / Steer Axle / Regional Application (3<sup>rd</sup> Generation)



# Definitions

## New Tire Dimensions

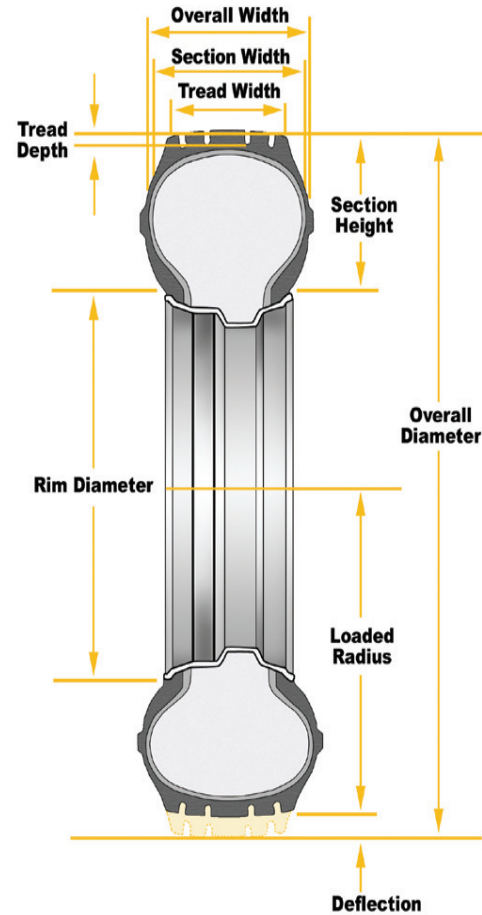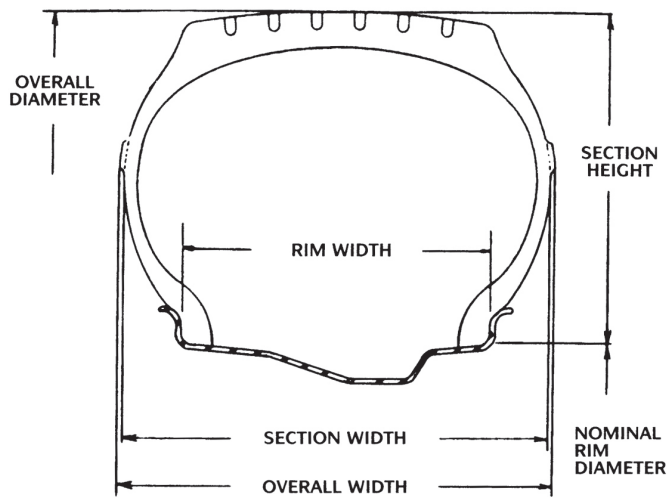


Aspect Ratio	Section Height   Section Width
Rim Width	Linear distance between the flanges of the rim.
Static Loaded Radius	Distance from wheel axle centerline to supporting tread surface at a given load and pressure in a static condition.
Tire (Overall) Width	The width of a new tire, including 24-hour inflation growth, and including protective side ribs, bars and decorations.
Section Height	Half the difference between the overall diameter and the nominal rim diameter.
Overall Diameter	The diameter of an inflated tire at the outermost surface of the tread, including 24-hour inflation growth.
Revolutions Per Mile	Measured number of revolutions for a tire traveling one mile. This can vary with speed, load, and inflation.
Tread Width	Distance across tread from shoulder to shoulder.
Width Loaded	Tire width (overall) under rated load conditions.
Minimum Dual Spacing	Minimum dual tire centerline to centerline measurement.
Section Width	Linear distance between outside of sidewalls of inflated tire (exclusive of markings, etc.).

# Low Aspect Ratio Tires

## 24.5 Inch Highway Size

(USING TYPICAL DESIGN DIMENSIONS)

### Match Tire For Speed And Axle Weights

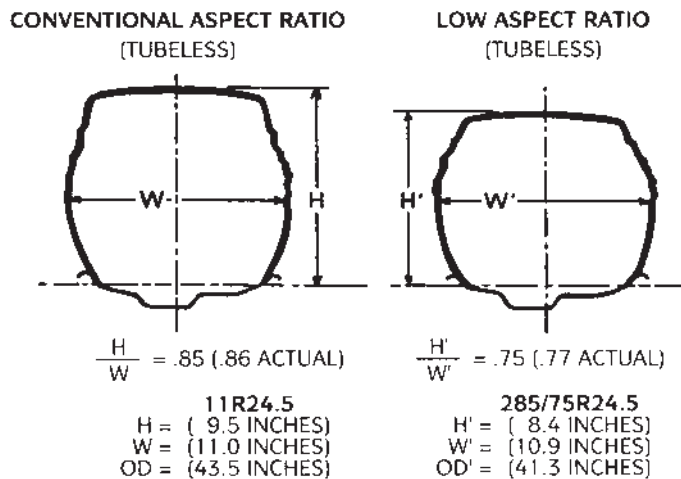

In a tire selection process, it is mandatory that consideration be given to selecting a tire size and load range which at least equals the maximum load requirements by axle position (steer, drive or trail). All highway truck tires have load limits established for tires used in normal highway service. Therefore, when selecting a tire for service, both the carrying capacity and speed implications must be considered.

#### TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES

THE PRESSURE IS MINIMUM FOR LOAD

MAXIMUM SPEED OF 65 (MPH)			Example for LRG							
			70 (480)	75 (520)	80 (550)	85 (590)	90 (620)	95 (660)	100 (690)	105 (720)
<b>11R22.5</b>	Dual	kg	1990	2080	2160	2250	2360	2460	2560	<b>2650 (G)</b>
		lbs	4380	4580	4760	4950	5205	5415	5625	<b>5840 (G)</b>
	Single	kg	2050	2160	2260	2370	2500	2600	2700	<b>2800 (G)</b>
		lbs	4530	4770	4990	5220	5510	5730	5950	<b>6175 (G)</b>
<b>11R24.5</b>	Dual	kg	2110	2210	2300	2390	2500	2580	2660	<b>2725 (G)</b>
		lbs	4660	4870	5070	5260	5510	5675	5840	<b>6005 (G)</b>
	Single	kg	2190	2300	2410	2520	2650	2770	2890	<b>3000 (G)</b>
		lbs	4820	5070	5310	5550	5840	6095	6350	<b>6610 (G)</b>

For example, when selecting tires for a tractor and trailer combination with a gross combination weight (GCW) of 80,000 lbs. and an axle weight distribution of 12,000 lbs. on the steer, 34,000 lbs. on the tandem drive and 34,000 lbs. on the tandem trailer axles, the most common conventional tire sizes used are 11R22.5 Load Range G and 11R24.5 Load Range G. The load and inflation schedule according to the Tire and Rim Association tables for these sizes is shown above.

# Service Descriptions

Continental Tire the Americas, LLC provides a service description onto the sidewall of all premium products.

This service description, which consists of one or more load indices and speed symbols, is located close to the tire size designation on the sidewall of the tire.

The load index relates to the maximum load carrying capacities allowed at the speed indicated by the speed symbol.

The speed symbol relates to the maximum speed allowed for the load carrying capacities associated with the load index.

The following is an example of a load index / speed symbol associated with a medium radial truck tire:

144/141



Load Indices  
(Single/Dual)

L



Speed Symbol

The attached chart shows the comparison of load index to load and speed symbol to maximum speed for radial truck tire products.

Consult your local Continental Tire representative for confirmation of the suitability of the tire/wheel assembly for the intended service.

# Truck-Bus Metric Tires

## International Load Index Numbers

LOAD INDEX	Kg	Lbs.
119	1360	3000
120	1400	3085
121	1450	3195
122	1500	3305
123	1550	3415
124	1600	3525
125	1650	3640
126	1700	3750
127	1750	3860
128	1800	3970
129	1850	4080
130	1900	4190
131	1950	4300
132	2000	4410
133	2060	4540
134	2120	4675
135	2180	4805
136	2240	4940
137	2300	5070
138	2360	5205
139	2430	5355
140	2500	5510
141	2575	5675
142	2650	5840
143	2725	6005
144	2800	6175

LOAD INDEX	Kg	Lbs.
145	2900	6395
146	3000	6610
147	3075	6780
148	3150	6940
149	3250	7160
150	3350	7390
151	3450	7610
152	3550	7830
153	2650	8050
154	3750	8270
155	3875	8540
156	4000	8820
157	4125	9090
158	4250	9370
159	4375	9650
160	4500	9920
161	4625	10200
162	4750	10500
163	4875	10700
164	5000	11000
165	5150	11400
166	5300	11700
167	5450	12000
168	5600	12300
169	5800	12800
170	6000	13200

SPEED SYMBOL	SPEED (kmh)	SPEED (mph)
F	80	50
G	90	56
J	100	62
K	110	68
L	120	75
M	130	81
N	140	87
P	150	93
Q	160	99
R	170	106
S	180	112
T	190	118

LOAD RANGE	PLY RATING
A	2
B	4
C	6
D	8
E	10
F	12
G	14
H	16
J	18
L	20
M	22
N	24

# Truck Tire Tread Depth Conversion Table to Percent Of Wear:

Original Tire Tread Depths in 32nds

		Original Tire Tread Depths in 32nds																															
Tread Remaining	32nd	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	32	37	38	39	40	41	32nd	Tread Remaining					
		2/32	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%		100%	2/32			
	3/32	90	91	92	92	93	93	94	94	94	95	95	95	95	96	96	96	96	96	96	97	97	97	97	97	97	97	3/32					
	4/32	80	82	83	85	86	87	88	88	89	89	90	90	91	91	92	92	92	93	93	93	94	94	95	95	95	95	4/32					
	5/32	70	73	75	77	79	80	81	82	83	84	85	86	86	87	88	88	88	89	89	90	91	92	92	92	92	92	5/32					
	6/32	60	64	67	69	71	73	75	76	78	79	80	81	82	83	84	85	85	86	87	89	89	90	91	92	92	90	6/32					
	7/32	50	55	58	62	64	67	69	71	72	74	75	76	77	78	79	80	81	81	82	83	86	86	86	87	87	87	7/32					
	8/32	40	45	50	54	57	60	63	65	67	68	70	71	73	74	75	76	77	78	79	80	83	83	84	84	85	8/32						
	9/32	30	36	42	46	50	53	56	59	61	63	65	67	68	70	71	72	73	74	75	77	80	81	81	82	82	9/32						
	10/32	20	27	33	38	43	47	50	53	56	58	60	62	64	65	67	68	69	70	71	73	77	78	78	79	79	10/32						
	11/32	10	18	25	31	36	40	44	47	50	53	55	57	59	61	63	64	65	67	68	70	74	75	76	76	77	11/32						
	12/32	0	9	17	23	29	33	38	41	44	47	50	52	54	57	58	60	62	63	64	67	71	72	73	74	74	12/32						
	13/32		0	8	15	21	27	33	35	39	42	45	45	50	52	54	56	58	59	61	63	69	69	70	71	72	13/32						
	14/32			0	8	14	20	25	29	33	37	40	43	45	48	50	52	54	56	57	60	66	67	68	68	69	14/32						
	15/32				0	7	13	19	24	28	32	35	38	41	43	46	48	50	52	54	57	63	64	65	66	67	15/32						
	16/32					0	6	13	18	22	26	30	33	36	39	42	44	46	48	50	53	60	61	62	63	64	16/32						
	17/32						0	6	12	17	21	25	29	32	35	38	40	42	44	46	50	57	58	59	61	62	17/32						
	18/32							0	6	11	16	20	24	27	30	33	36	39	41	43	47	54	56	57	58	59	18/32						
	19/32								0	6	11	15	19	23	26	29	32	35	37	39	43	51	53	54	55	56	19/32						
	20/32									0	5	10	14	18	22	25	28	31	33	36	40	49	50	51	53	54	20/32						
	21/32										0	5	10	14	17	21	24	27	30	32	37	46	47	49	50	51	21/32						
	22/32											0	5	5	13	17	20	23	26	29	33	43	44	46	47	49	22/32						
	23/32												0	9	9	13	16	19	22	25	30	40	42	43	45	46	23/32						
	24/32													0	4	8	12	15	19	21	27	37	39	41	42	44	24/32						
	25/32														0	4	8	12	15	18	23	34	36	38	39	41	25/32						
	26/32															0	4	8	11	14	21	31	33	35	37	38	26/32						
	27/32																0	4	7	11	17	29	31	32	34	36	27/32						
	28/32																	0	4	7	13	26	28	30	32	33	28/32						
	29/32																		0	4	10	23	25	27	29	31	29/32						
	30/32																			0	7	20	22	24	26	28	30/32						
	31/32																				3	17	19	22	24	26	31/32						
	32/32																				0	14	17	19	21	23	32/32						
	33/32																					11	14	16	18	21	33/32						
	34/32																					9	11	14	16	18	34/32						
	35/32																					6	8	11	13	15	35/32						
	36/32																					3	6	8	11	13	36/32						
	37/32																					0	3	5	8	10	37/32						
	38/32																						0	3	5	8	38/32						
	39/32																							0	3	5	39/32						
	40/32																								0	3	40/32						
	41/32																									0	41/32						

**SAFETY WARNING**

SERIOUS INJURY MAY RESULT FROM:

Explosion of tire/rim assembly due to improper mounting - use safety cage and clip on extension air hose. Only specially trained persons should mount tires.

Tire failure due to misapplication/improper inflation/overloading - follow tire manufacturer's instructions. Check inflation pressure frequently with gauge.

A tire must always match the diameter requirements of the rim to which it is being mounted. For example, a 16 inch tire must always be mounted on a 16 inch rim. Also, when replacing the truck type radial tires, use only wheels approved for radial tires.

# Retread Casing Fitment Guide

## Tread Width Followed By Tire Sizes

<b>150</b>	<b>185 (continued)</b>	<b>205 (continued)</b>	<b>215 (continued)</b>	<b>225 (continued)</b>	<b>245 (continued)</b>	<b>390</b>
9R22.5	245/70R19.5	225/70R19.5	225/70R19.5	12.00R24	12.00R24	445/50R22.5
215/85R16	265/70R19.5	225/75R16	245/70R19.5	11R24.5	11R22.5	455/55R22.5
<b>160</b>	255/70R22.5	235/75R17.5	265/70R19.5	12R24.5	11R24.5	<b>400</b>
215/85R16	10R17.5	235/85R16	285/70R19.5	<b>230</b>	<b>250</b>	445/50R22.5
225/75R16	9R22.5	245/70R17.5	255/70R22.5	275/80R22.5	365/80R20	455/55R22.5
235/85R16	10R22.5	245/70R19.5	275/70R22.5	295/75R22.5	305/70R22.5	<b>410</b>
215/75R17.5	<b>195</b>	245/75R16	275/80R22.5	285/75R24.5	315/80R22.5	445/50R22.5
235/75R17.5	215/85R16	255/70R22.5	295/75R22.5	11R22.5	12.00R24	455/55R22.5
10R17.5	225/75R16	265/70R19.5	285/75R24.5	12R22.5	<b>260</b>	
9R22.5	235/85R16	275/70R22.5	10R22.5	12.00R24	315/80R22.5	
<b>170</b>	245/75R16	275/80R22.5	11R22.5	11R24.5	305/75R24.5	
215/85R16	215/75R17.5	285/70R19.5	12R22.5	12R24.5	<b>270</b>	
225/75R16	235/75R17.5	285/75R24.5	12.00R24	<b>235</b>	315/80R22.5	
235/85R16	225/70R19.5	295/75R22.5	11R24.5	275/80R22.5	305/75R24.5	
215/75R17.5	245/70R19.5	245/75R22.5	12R24.5	295/75R22.5	<b>280</b>	
235/75R17.5	265/70R19.5	265/75R22.5	<b>220</b>	285/75R24.5	315/80R22.5	
225/70R19.5	255/70R22.5	<b>210</b>	235/75R17.5	11R22.5	<b>290</b>	
10R17.5	10R17.5	225/75R16	245/70R17.5	12R22.5	365/80R20	
9R22.5	9R22.5	235/85R16	245/70R19.5	12.00R24	385/65R22.5	
10R22.5	10R22.5	245/75R16	265/70R19.5	11R24.5	<b>320</b>	
<b>180</b>	<b>200</b>	235/75R17.5	285/70R19.5	12R24.5	365/80R20	
215/85R16	225/75R16	245/70R17.5	255/70R22.5	<b>240</b>	385/65R22.5	
225/75R16	235/85R16	225/70R19.5	275/70R22.5	275/80R22.5	425/65R22.5	
235/85R16	245/75R16	245/70R19.5	275/80R22.5	295/75R22.5	<b>340</b>	
245/75R16	215/75R17.5	265/70R19.5	295/75R22.5	295/80R22.5	18R19.5	
215/75R17.5	235/75R17.5	285/70R19.5	295/80R22.5	305/70R22.5	18R22.5	
235/75R17.5	245/70R17.5	255/70R22.5	285/75R24.5	315/80R22.5	445/65R22.5	
225/70R19.5	225/70R19.5	275/70R22.5	10R22.5	285/75R24.5	445/65R19.5	
245/70R19.5	245/70R19.5	275/80R22.5	11R22.5	11R22.5	445/50R22.5	
255/70R22.5	265/70R19.5	295/75R22.5	12R22.5	12R22.5	425/65R22.5	
10R17.5	255/70R22.5	285/75R24.5	12.00R24	12.00R24	<b>350</b>	
9R22.5	10R17.5	10R22.5	11R24.5	11R24.5	18R19.5	
10R22.5	10R22.5	11R22.5	12R24.5	12R24.5	18R22.5	
<b>185</b>	12.00R24	12R22.5	<b>225</b>	<b>245</b>	445/65R22.5	
215/85R16	<b>205</b>	12.00R24	285/70R19.5	295/75R22.5	445/65R19.5	
225/75R16	10R22.5	11R24.5	275/80R22.5	275/80R22.5	445/50R22.5	
235/85R16	11R22.5	12R24.5	295/75R22.5	285/75R24.5	425/65R22.5	
245/75R16	11R24.5	<b>215</b>	295/80R22.5	295/80R22.5	<b>360</b>	
215/75R17.5	12.00R24	235/85R16	285/75R24.5	365/80R20	445/65R22.5	
235/75R17.5	12R22.5	235/75R17.5	11R22.5	305/70R22.5	<b>380</b>	
225/70R19.5	12R24.5	245/70R17.5	12R22.5	315/80R22.5	445/65R22.5	

**\*Not a technical recommendation or guide.** For use as sales information only. Please consult your local authorized ContiLifeCycle dealer for technical specifications.

# Safety Warnings

## Tire Demounting And Mounting Safety Precautions



### SAFETY WARNING


SERIOUS INJURY OR DEATH MAY RESULT FROM:







EXPLOSION OF TIRE RIM ASSEMBLY DUE TO IMPROPER MOUNTING - USE SAFETY CAGE & CLIP-ON EXTENSION AIR HOSE. ONLY SPECIALLY TRAINED PERSONS SHOULD MOUNT TIRES.




### WARNING

Tire and wheel servicing can be dangerous, and should be done by trained personnel using proper tool and procedures and safety precautions in the RMA's "Demounting and Mounting Procedures for Trucks/Bus Tires" and "Inspection procedures for identification of potential zipper ruptures in steel cord radial medium and light truck tires" charts and service bulletins.

Failure to comply with these procedures may result in faulty positioning of the tire and/or rim parts, and cause the assembly to burst with explosive force, sufficient to cause serious injury or death. Never mount or use damaged tires or rims.

### MISAPPLICATION/IMPROPER INFLATION/OVERLOADING SAFETY WARNINGS



### WARNING

There is danger of serious injury or death if a tire of one bead diameter is installed on a rim or wheel of a different rim diameter.


Re-assembly and inflation of mismatched parts can result in serious injury or death. Just because parts come in together does not mean they belong together. Check for proper matching of all rim parts before putting any parts together.

Always replace a tire of exactly the same bead diameter designation and suffix letters.


For example: A 16" tire goes on a 16" rim. Never mount a 16" tire on a 16.1" or 16.5" rim. A 16.1" tire goes on a 16.1" rim. Never mount a 16.1" tire on a 16" or 16.5" rim. A 16.5" tire goes on 16.5" rim. Never mount a 16.5" tire on a 16" or 16.1" rim.

While it is possible to pass a 16" diameter tire over the lip or flange of a 16.1" or 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tire bead by inflating, the tire bead will break with explosive force and could cause serious injury or death.

Rims of different diameters and tapers cannot be interchanged. The following diagram illustrates the difference between rims of two different tapers and diameters.

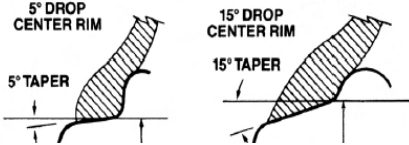

The following diagram shows how beads of a 16" tire will not seat on a 16.5" rim. The beads cannot be forced out against the rim flanges by using more air pressure because this will break the beads and the tire will explode with force sufficient to cause serious injury or death.



Never assemble a tire and rim unless you have positively identified and correctly matched the parts.

# Safety Warnings

## Tire Demounting And Mounting Safety Precautions

### WARNING

NEVER inflate beyond 40 pounds pressure to seat beads.


NEVER stand, lean or reach over the assembly during inflation.

Inspect both sides of the tire to be sure that the beads are evenly seated. If tire is mounted on a machine that does not have a positive lock-down device to hold the wheel, inflation should be done on a safety cage. If both beads are not properly seated when pressure reaches 40 pounds air pressure, completely deflate the assembly, reposition the tire and/or tube on the rim, re-lubricate and reinflate. Inflating beyond 40 pounds air pressure when trying to seat the beads is a DANGEROUS PRACTICE that may break a tire bead (or even the rim) with explosive force, possibly resulting in serious injury or death. After the beads are fully seated, pressure may be increased above 40 psi to operating pressures, not to exceed the maximum labeled on the tire sidewall.

### WARNING

Permanent tire damage due to under inflation and/or overloading cannot always be detected. Any tire known or suspected to have been run at 80% or less of normal operating inflation pressure and/or overloaded, could possibly have permanent structural damage (steel cord fatigue). Ply cords weakened by under inflation and/or overloading may break one after another, until a rupture occurs in the upper sidewall with accompanying instantaneous air loss and explosive force. This can result in serious injury or death.

Any tire of having been operated and under inflated and/or overloaded must be approached with caution. Completely deflate the tire by removing the valve core before removing the tire/rim/wheel assembly from the vehicle. After removing from the vehicle, clearly identify the tire so it will not be reinflated **until carefully inspected by a trained technician** to determine the cause of under inflation, as well as any tire damage resulting from under inflation and/or overloading.

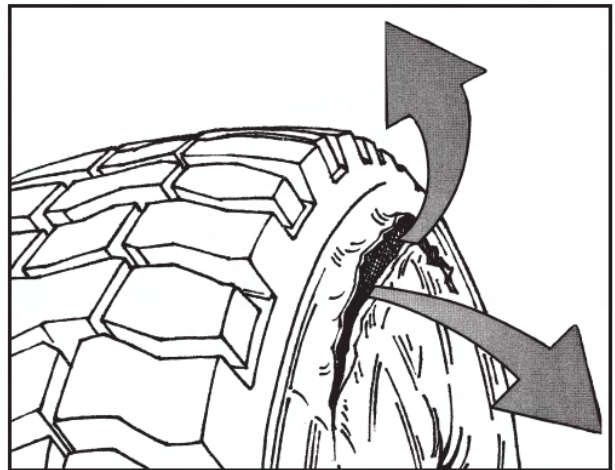

### WARNING

The use of any flammable material during tire servicing is absolutely prohibited. Use of starting fluid ether, gasoline, or any other flammable material to lubricate, seal or seat the beads of a tubeless tire can cause the tire to explode or can cause the explosive separation of the tire/rim assembly resulting in serious injury or death.

This practice may also result in undetected damage to the tire or rim that could result in failure of the tire in service.



# Safety Warnings




FIGURE 1



FIGURE 2

STAY OUT OF THE TRAJECTORY AS INDICATED BY SHADED AREA  
Note: Under some circumstances, the trajectory may deviate from its expected path.

Always deflate tires before handling. Inflate only in safety cage.

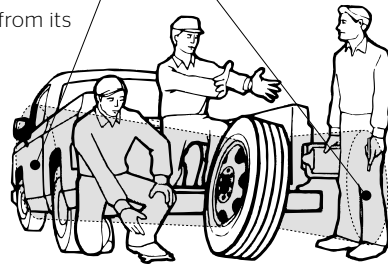


FIGURE 3

The air pressure contained in a tire is dangerous. The sudden release of this pressure by a tire blow-out or side ring separation can cause serious injury or death. Stay out of the trajectory as indicated by shaded area. When installing the tire/rim assembly on the vehicle, it will be impossible to stay out of the trajectory; however, at all other time you and all others must stay out of the trajectory.



## WARNING

Tire explosions can cause death or personal injury or property damage.

Excessive speed in a free-running, unloaded tire can cause it to “explode” from extreme centrifugal force.



## WARNING

When mounting dual disc wheels on a vehicle, be sure to carefully check and retighten or re-torque inner cap nuts before mounting the outer wheel. In demounting the outer wheel, there is a possibility that the inner cap nuts may have been loosened accidentally.

NEVER rework, weld, heat, or braze the tire/wheel/rim. Heating the rim of tire/wheel/rim. Heating the rim of tire/wheel/rim assembly can cause a tire to explode, causing serious injury or death,

NEVER hammer, strike or pry any type of tire/rim assembly while the tire contains inflation pressure. Do not attempt to seat any part while the tire contains any inflation pressure. This could result in serious injury.

### Regrooving

Continental, General Tire, AmeriSteel, and Euzkadi brand truck tires that have “REGROOVABLE” molded on the sidewall may be regrooved. After regrooving, it is required that 3/32” of under tread remains to cover the top ply. It is the responsibility of the regroover to assure that all Federal Regulations are met. For further clarification, see Code of Federal Regulations: Title 49, Transportation; Parts 569 and 393.75.



The Future in Motion

1830 MacMillan Park Drive  
Fort Mill, S.C. 29707

Check here if Return to Stock Tires ONLY

DO NOT PAY FROM THIS DOCUMENT  
AN INVOICE WILL BE SENT FROM CONTINENTAL TIRE THE AMERICAS, LLC.

# DELIVERY RECEIPT

D9

DATE DELIVERED	CUST ORDER DATE	PURCHASE ORDER NUMBER AND/OR AUTHORIZATION NUMBER
----------------	-----------------	---

NATIONAL ACCOUNT AND/OR FLEET BILLING REQUIREMENTS:		
ALWAYS SHOW CUSTOMER INFORMATION. REFER TO NAT'L ACCOUNT DIRECTORY		
RELEASE NO./FLEET NO.	ID CARD NO.	VEHICLE NO.
WHEEL POSITION	AUTHORIZATION NO.	
LICENSE & STATE	ODOMETER/HUBOMETER	VEHICLE MAKE/YEAR
17 DIGIT VIN #:		

DELIVERED BY- DEALER ACCOUNT NUMBER	
ACCOUNT NO.	ASSOCIATE DEALER
NAME	
ADDRESS	
CITY, STATE, ZIP	

**IMPORTANT**

Dealer must check  
(✓) **ONE ONLY** for  
Continental Tire  
the Americas, LLC.  
to correctly apply Sales Tax.



3.   
Tires delivered  
to this location

OR



1.  Tires delivered  
to this location



2.  Tires delivered  
to this location

OR

If neither, enter City, County, and  
State tires shipped to or picked up at:

STREET	
CITY	
COUNTY	ZIPCODE
STATE	

SHIPPED TO/DELIVERED TO (COMPANY NAME)		SOLD TO/BILLED TO (WHERE INVOICE IS TO BE SENT)	
CTA ACCOUNT NUMBER (REQUIRED FOR CAR DEALERS)			
CUSTOMER NAME		NAME	
STREET ADDRESS		STREET ADDRESS	
CITY	STATE	ZIP	
CITY	STATE	ZIP	
TIRE/SERVICE ACCEPTED BY: (PRINT)	COMPANY TELEPHONE	<b>AUTHORITY</b> WHEN DELIVERING TO CUSTOMERS OF OTHER DEALERS OR NEEDING FLEET MANAGER APPROVAL SHOW AUTHORITY OBTAINED  PHONE <input type="checkbox"/> NAME:	
TIRE/SERVICE ACCEPTED BY: SIGNATURE (ACKNOWLEDGE RECEIPT OF PRODUCT-REQUIRED)	( ) - - - - -		

**MERCHANDISE**

INSTRUCTIONS	QTY.	SIZE	PLY	DESCRIPTION	PRODUCT CODE OR ARTICLE NO.	INPUT PRICE PER UNIT WHEN ASKED FOR
SAFETY SERVICE: SHOW MAKE OF VEHICLE, DESCRIPTION, PRICE OF SERVICE IF NOT NOTED IN SERVICE PRICE LIST AND PRODUCT CODE NUMBER						
WRITE COMPLETE DESCRIPTION ON ALL MERCHANDISE DELIVERED						
MAIL ORIGINAL DELIVERY RECEIPT PART TO CONTINENTAL TIRE THE AMERICAS, LLC. NATIONAL ACCOUNTS, 1830 MACMILLAN PARK DRIVE, FORTMILL, SC 29707						
< >				COMMERCIAL TRUCK CASING CREDIT	20230100000	

# Warranty Information

For Commercial  
Vehicle Tires Only

One of the largest automotive suppliers and tire manufacturers in the world, Continental develops pioneering technologies to make fleets safer, more efficient, and more connected. With innovative tire technology and digital fleet solutions, Continental optimizes tire lifecycle management to deliver the lowest overall driving cost.

For the most up-to-date warranty information, please visit:

[www.continental-truck.com/truck/warranty](http://www.continental-truck.com/truck/warranty)



**Continental**  
The Future in Motion

## Limited Warranty & Adjustment Policy

**Continental** **ContiTread™**  
**GENERAL TIRE** **AMERI+STEEL**  
**TECNOTREAD**

Continental Truck and Bus Tires  
[www.continental-truck.com](http://www.continental-truck.com)




# ContiTireDrive App

## A Central Location for all Continental Information


The ContiTireDrive App combines all Continental tools, product information and assets in a consolidated place. The app is designed as the go-to solution to keep up-to-date on all Continental news, products and access to fleet and dealer services.

### App Features:

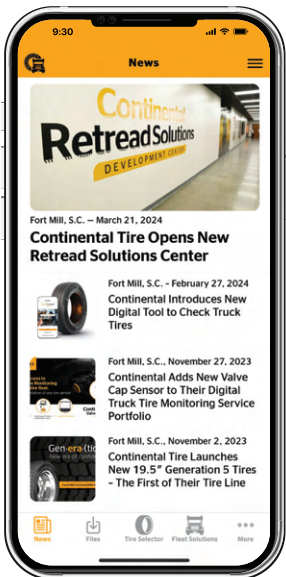


#### News

See the latest Continental product launches and top stories.

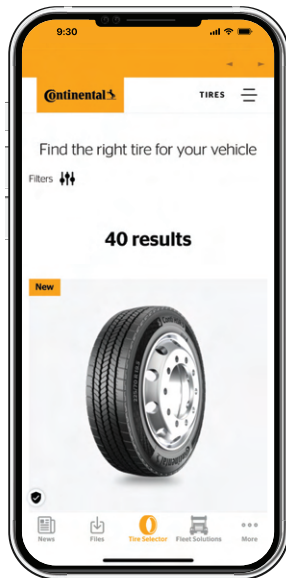


#### Tire Selector

Find the perfect tires or treads based on axle position, segment, application, tire size and attributes.

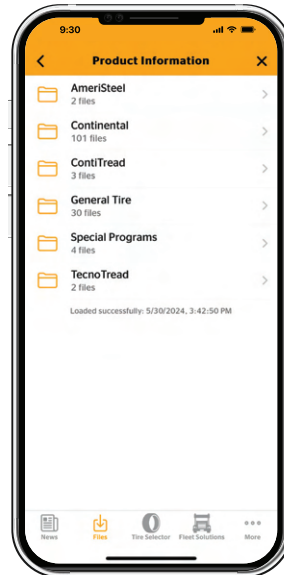

#### Product Information

Access the most up-to-date product literature, including Continental's comprehensive databook, single product sheets and more.

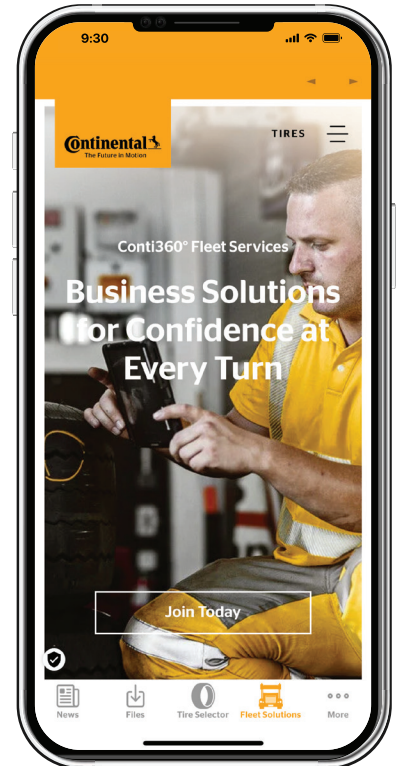

#### Fleet Solutions

Access all of Continental's Fleet Solutions support right from your phone.

### Download the App Now:

[www.contitiredriveapp.com](http://www.contitiredriveapp.com)

Available for iOS and Android

- Log in with your Continental account number to access special features.
- Continental Employees: Log in with your Continental email address.
- **Scan the QR code to download the app!**



# Tire Selector and Dealer Locator

## Making it Easier to Find Tires and Dealers

The Tire Selector Tool can be found at [www.continental-truck.com](http://www.continental-truck.com). This tool helps users find the perfect tire and provides product choices for every need.



We make selecting a tire easy.

### New Additions

- View all new and retread products at a glance with the tire finder function.
- Users can search by axle position, application, segment, attributes, or tire size. Choose a tire for car carriers, motor coaches, and everything in between.
- Tire Size option has been updated with new products.





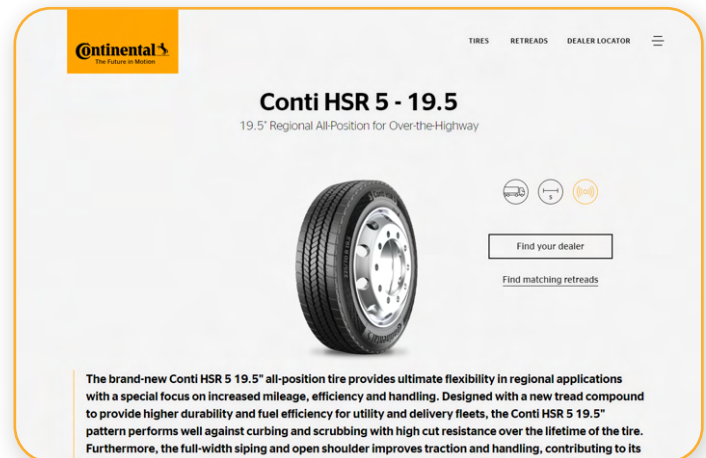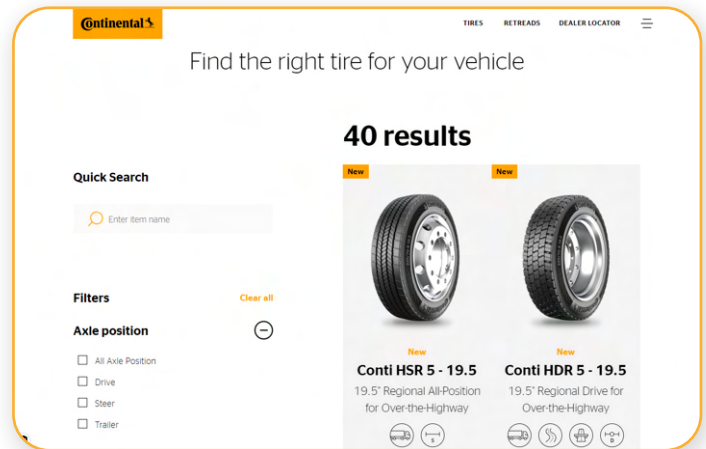

### Tire Selector Benefits

- See tire benefits at a glimpse with our easily identifiable icons.
- Find the perfect tire fast, using the many selections available.
- View detailed tire information upon tire selection.
- Find the Tire Selector button on every page of the website, in the top right corner of the screen.
- Once the tire selection has been made navigate to our Dealer Locator to find a dealer near you.




### Dealer Locator

The Dealer Locator is on [www.continental-truck.com](http://www.continental-truck.com). The Dealer Locator helps locate a dealer who can provide all services needed. The easy icons identify dealers as a:

-  **ContiTread Retreader**
-  **24-Hour TrukFix**
-  **Digital Solutions Provider**
-  **Mechanical**
-  **TrukFix Dealer**
-  **Towing**

### How to Use

Type in your city, state, and/or zip code. Our tool will then find the dealer closest to your location. Call the number provided from your search or get directions to a dealer near you.

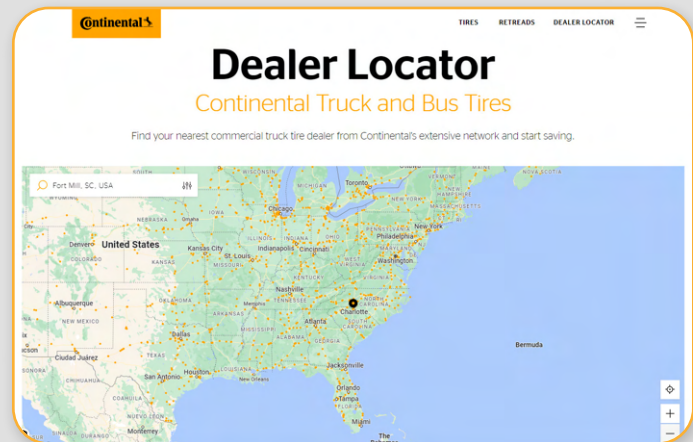







Continental Tire the Americas, LLC  
1830 MacMillan Park Drive  
Fort Mill, SC 29707  
Phone: 704-583-3900

Technical Customer Services & Warranty  
3000 Continental Parkway  
Clinton, MS 39056  
Phone: 800-726-7113  
TI\_CQ\_SM\_help.trucktires@continental.com

Original Equipment Sales  
800-776-2022

Commercial Specialty Tires  
877-235-0102

INSIDE SALES / U.S.  
800-450-4028 East  
800-450-3187 West

01/2025 © Continental Tire the Americas, LLC TT-CO-BK-DATA

