

Cyberbond Install

or

REMA Install

or

Valve Cap Install

YARD

Program Tire Sensor

or

Program Valve Cap

Create Vehicle

or

Update Vehicle

LIVE

Program Tire Mounted Sensor for Yard

with Hand Held Tool (HHT)


Time estimate:

10-15 min




Scan or tap for video walk-through, other trainings, and Spanish translations.

1

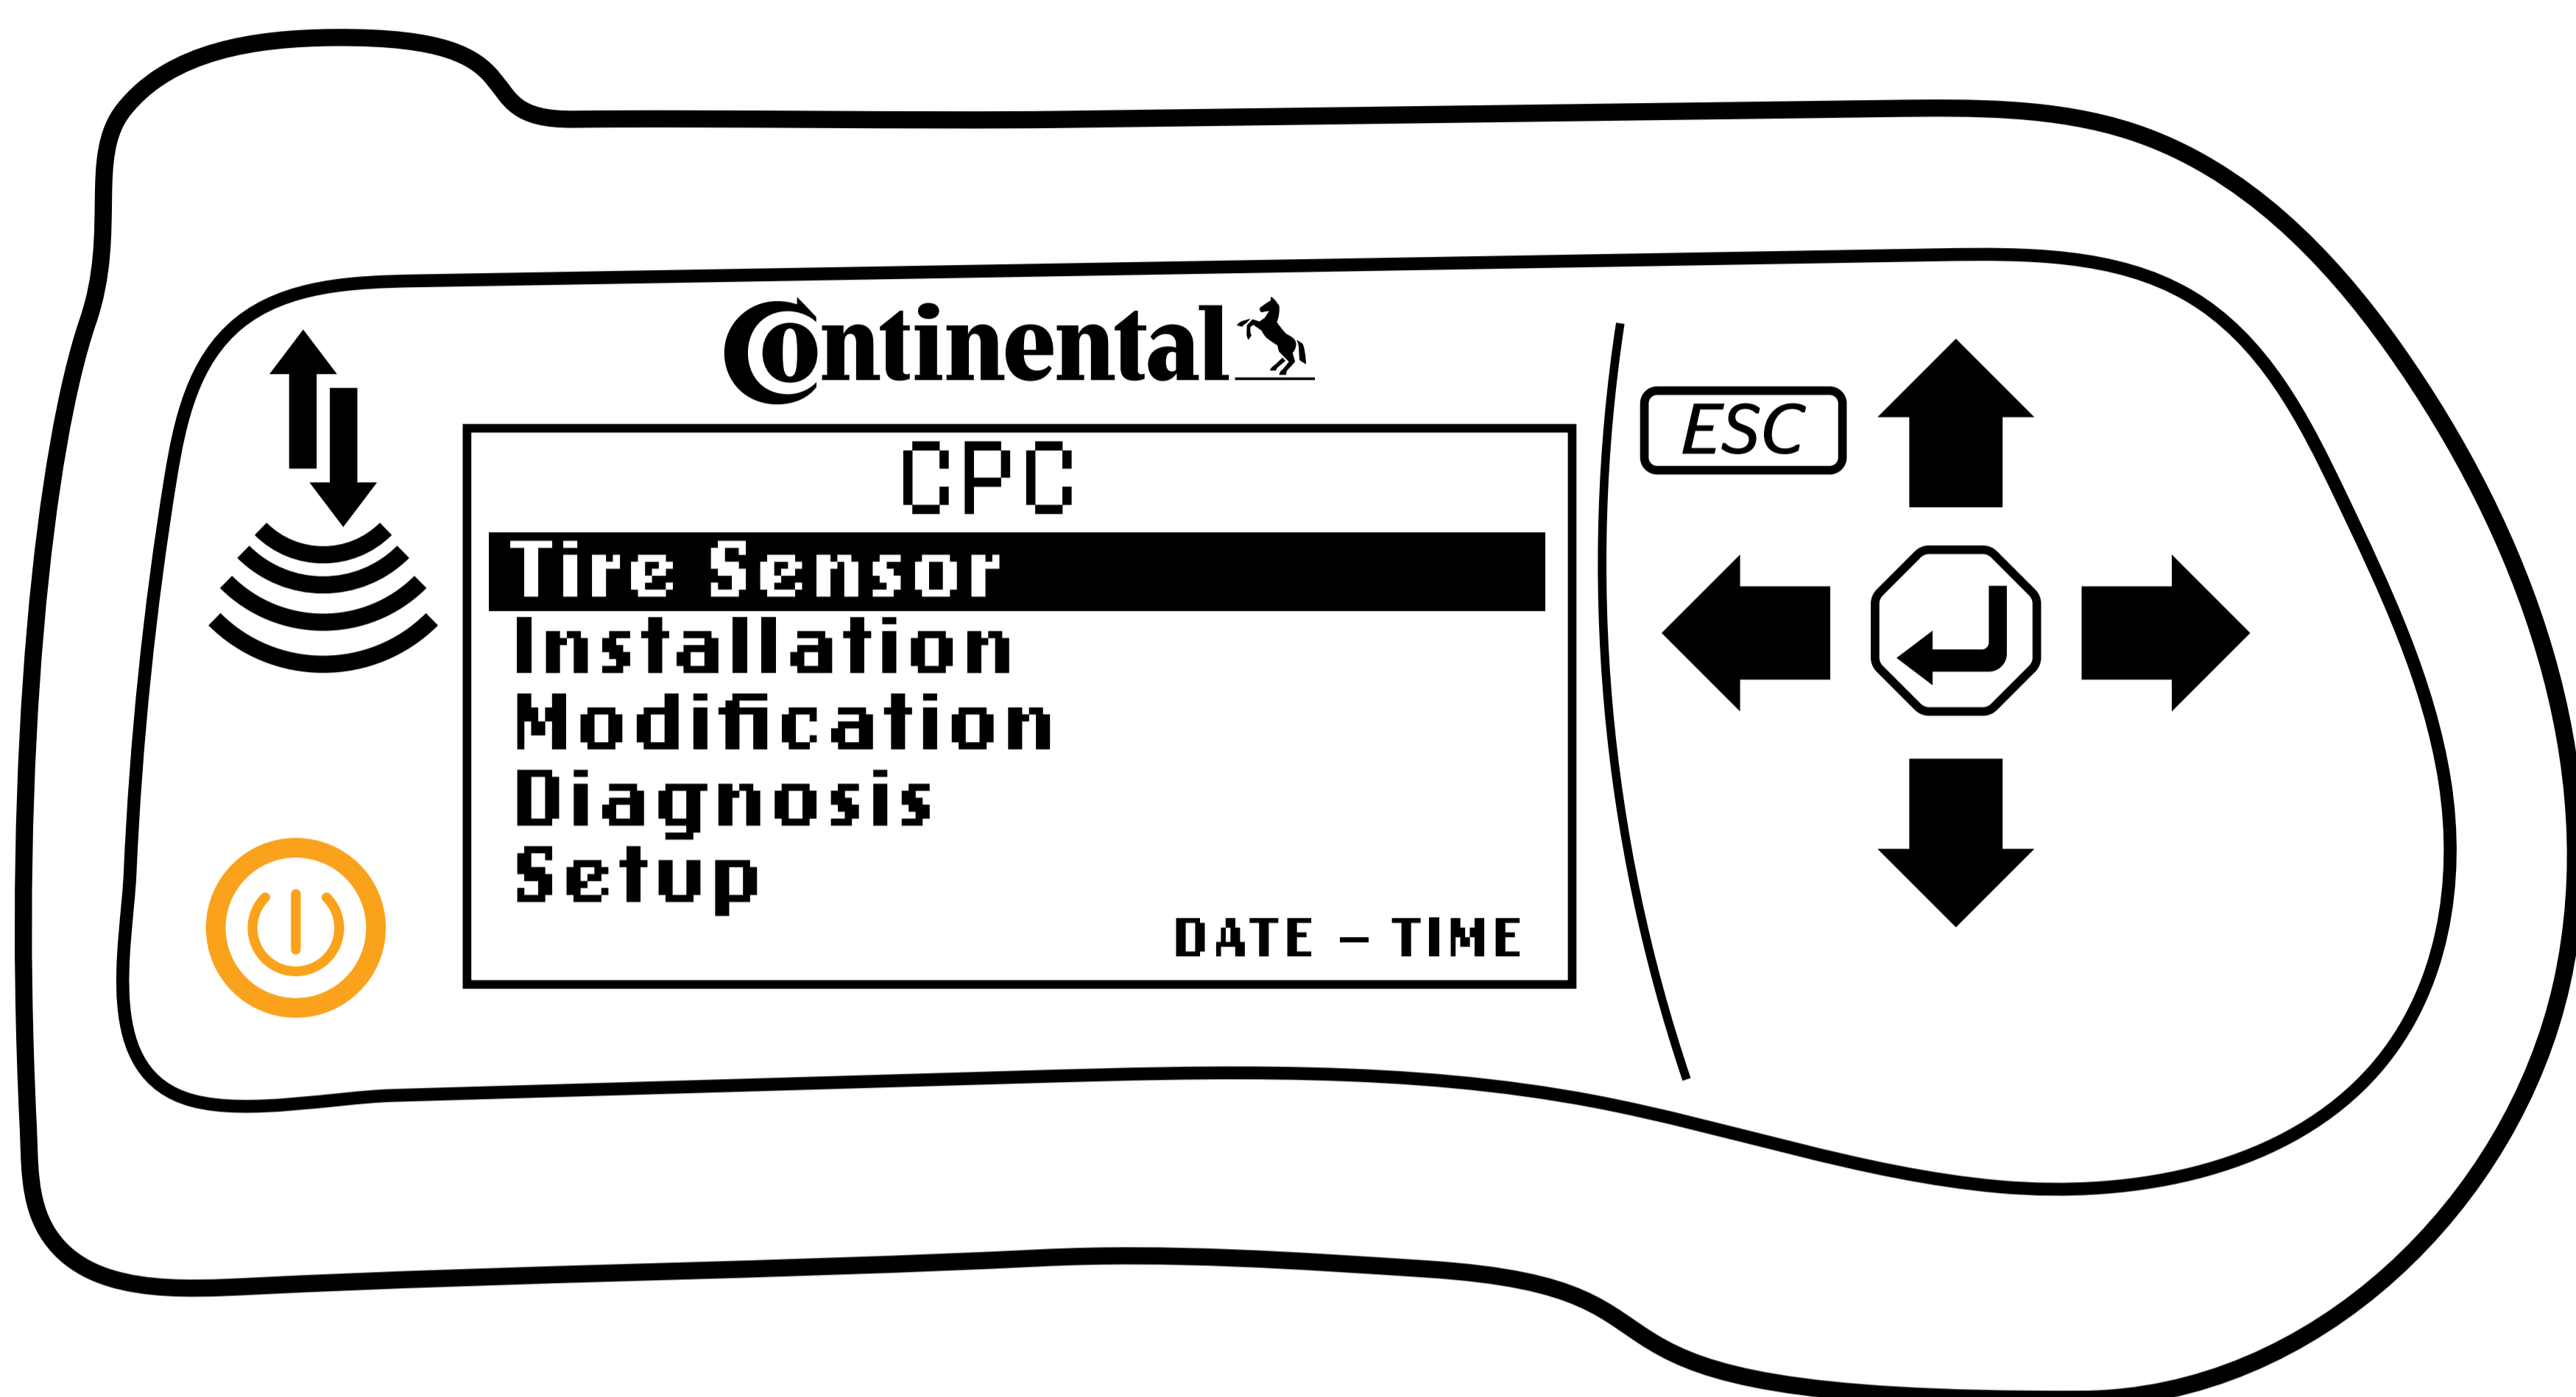


Turn on the HHT.

Program Tire Mounted Sensor for Yard

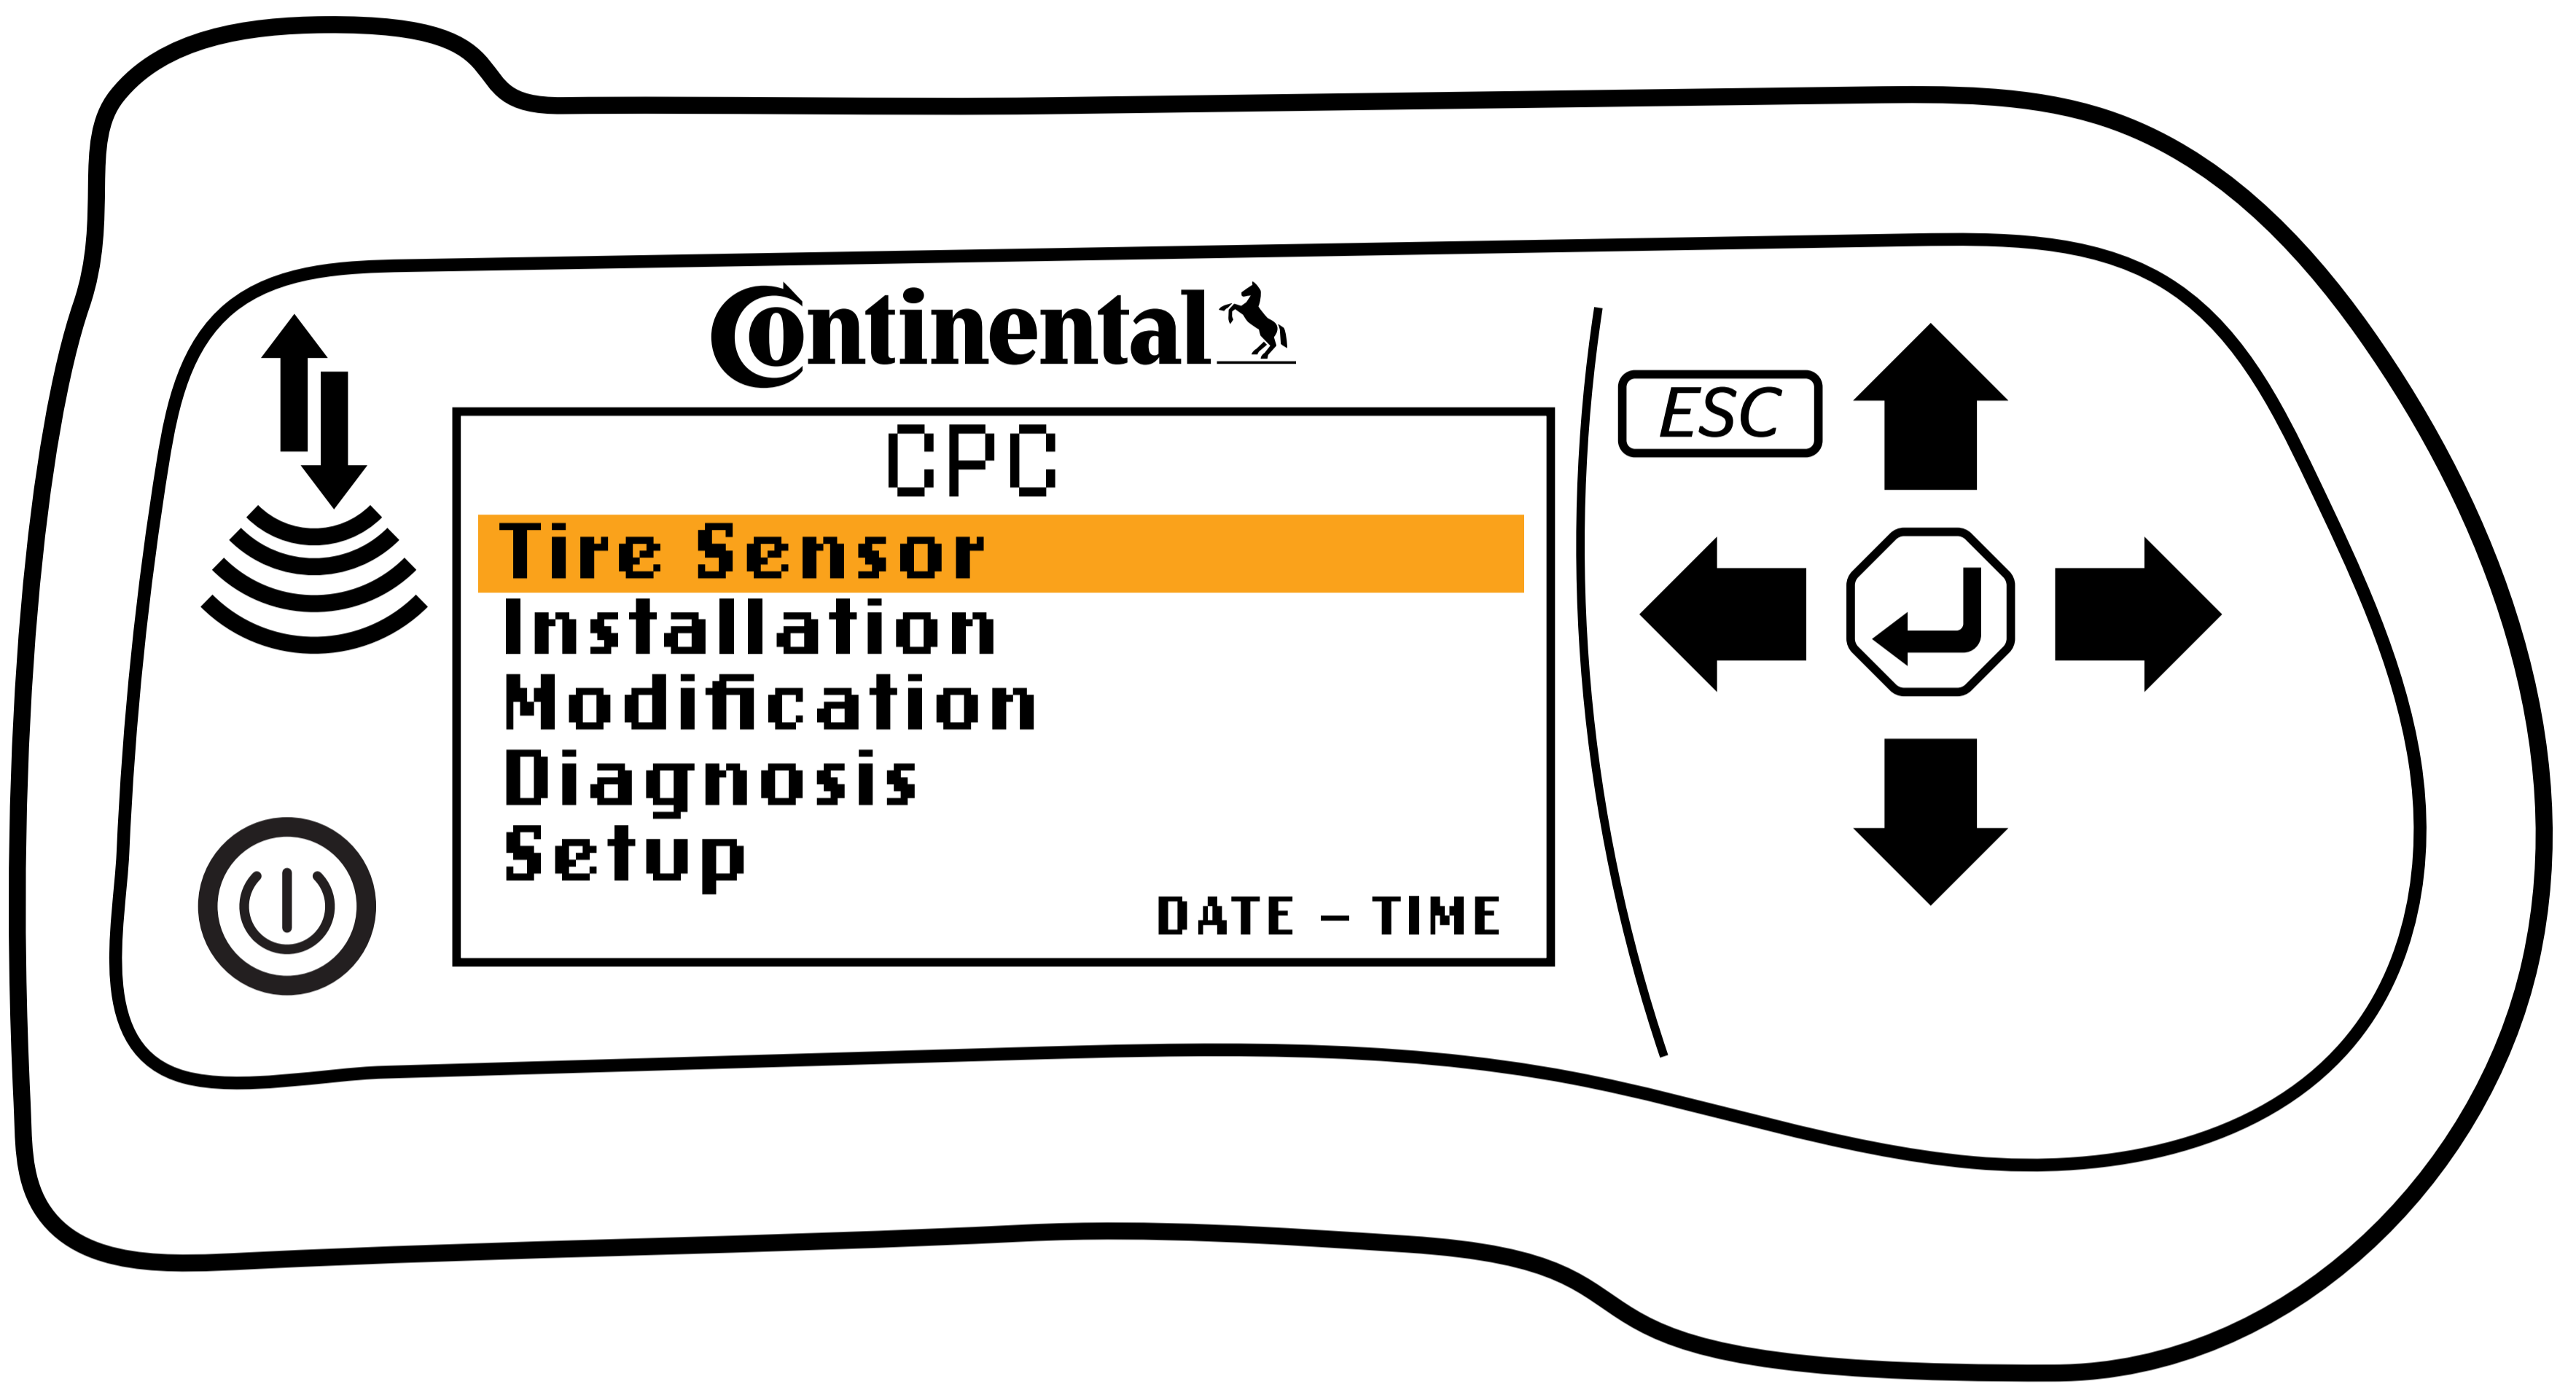


Select 'Tire Sensor'.

Program Tire Mounted Sensor for Yard

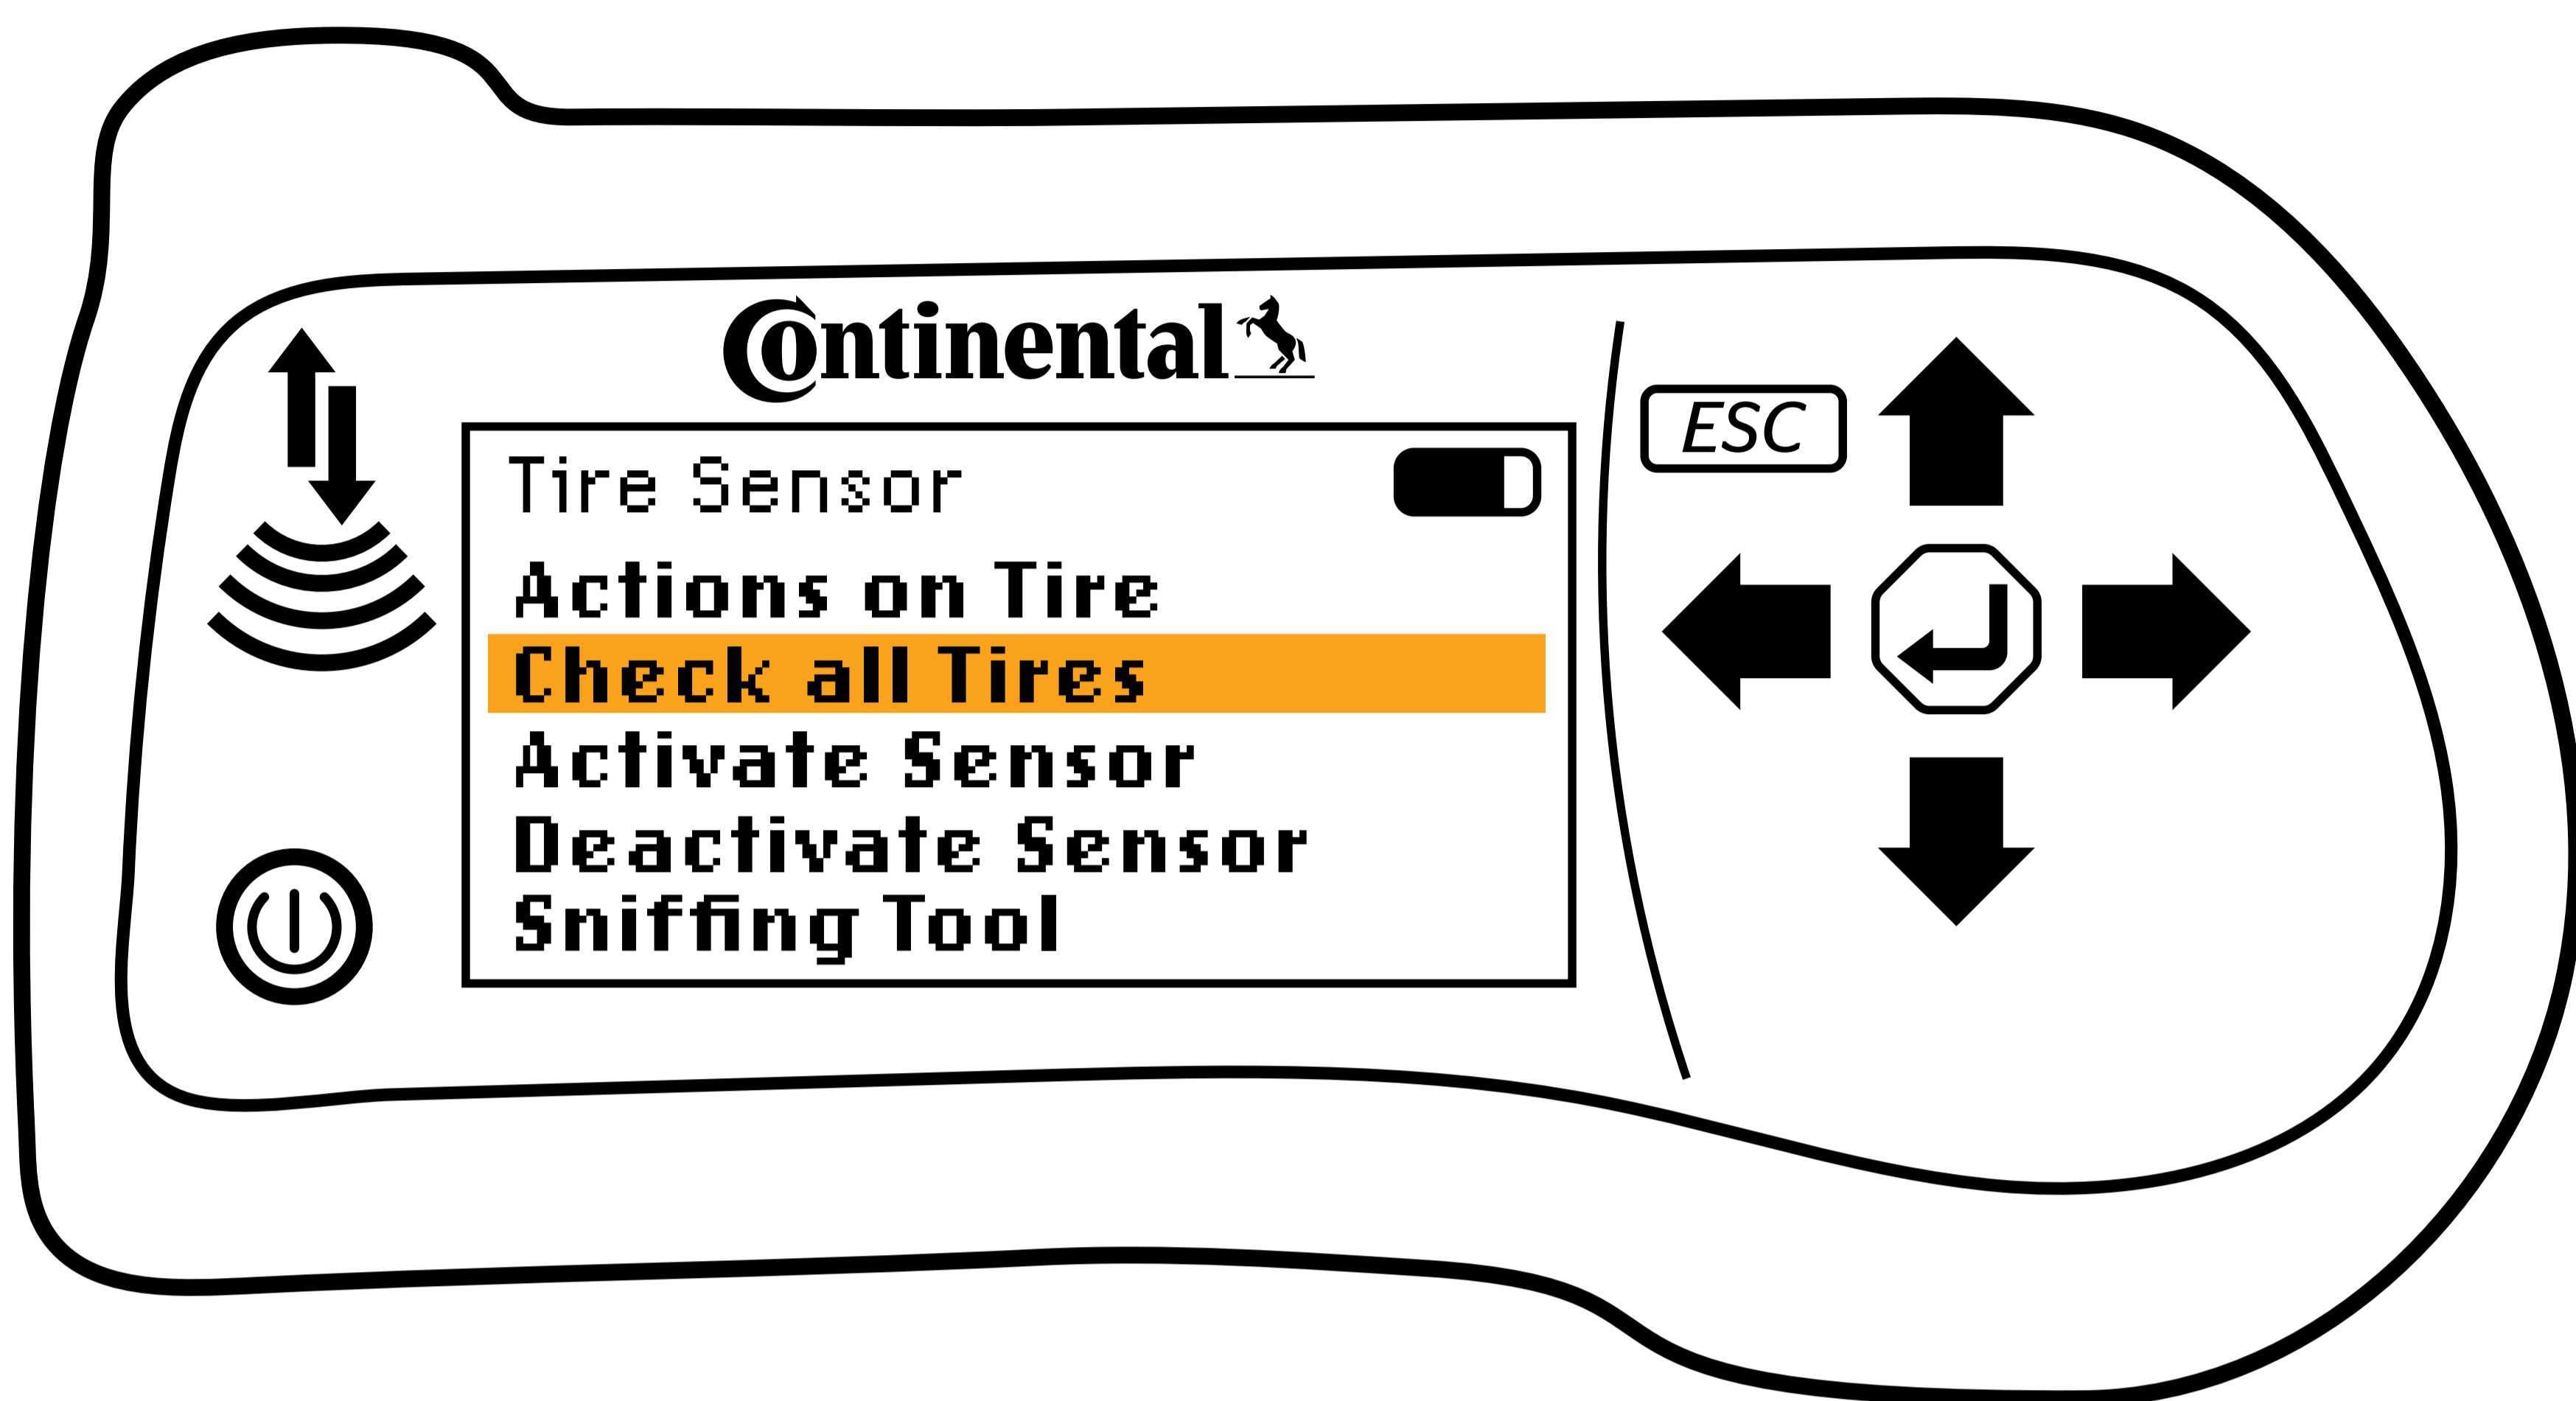


Select 'Check All Tires'.

Program Tire Mounted Sensor for Yard

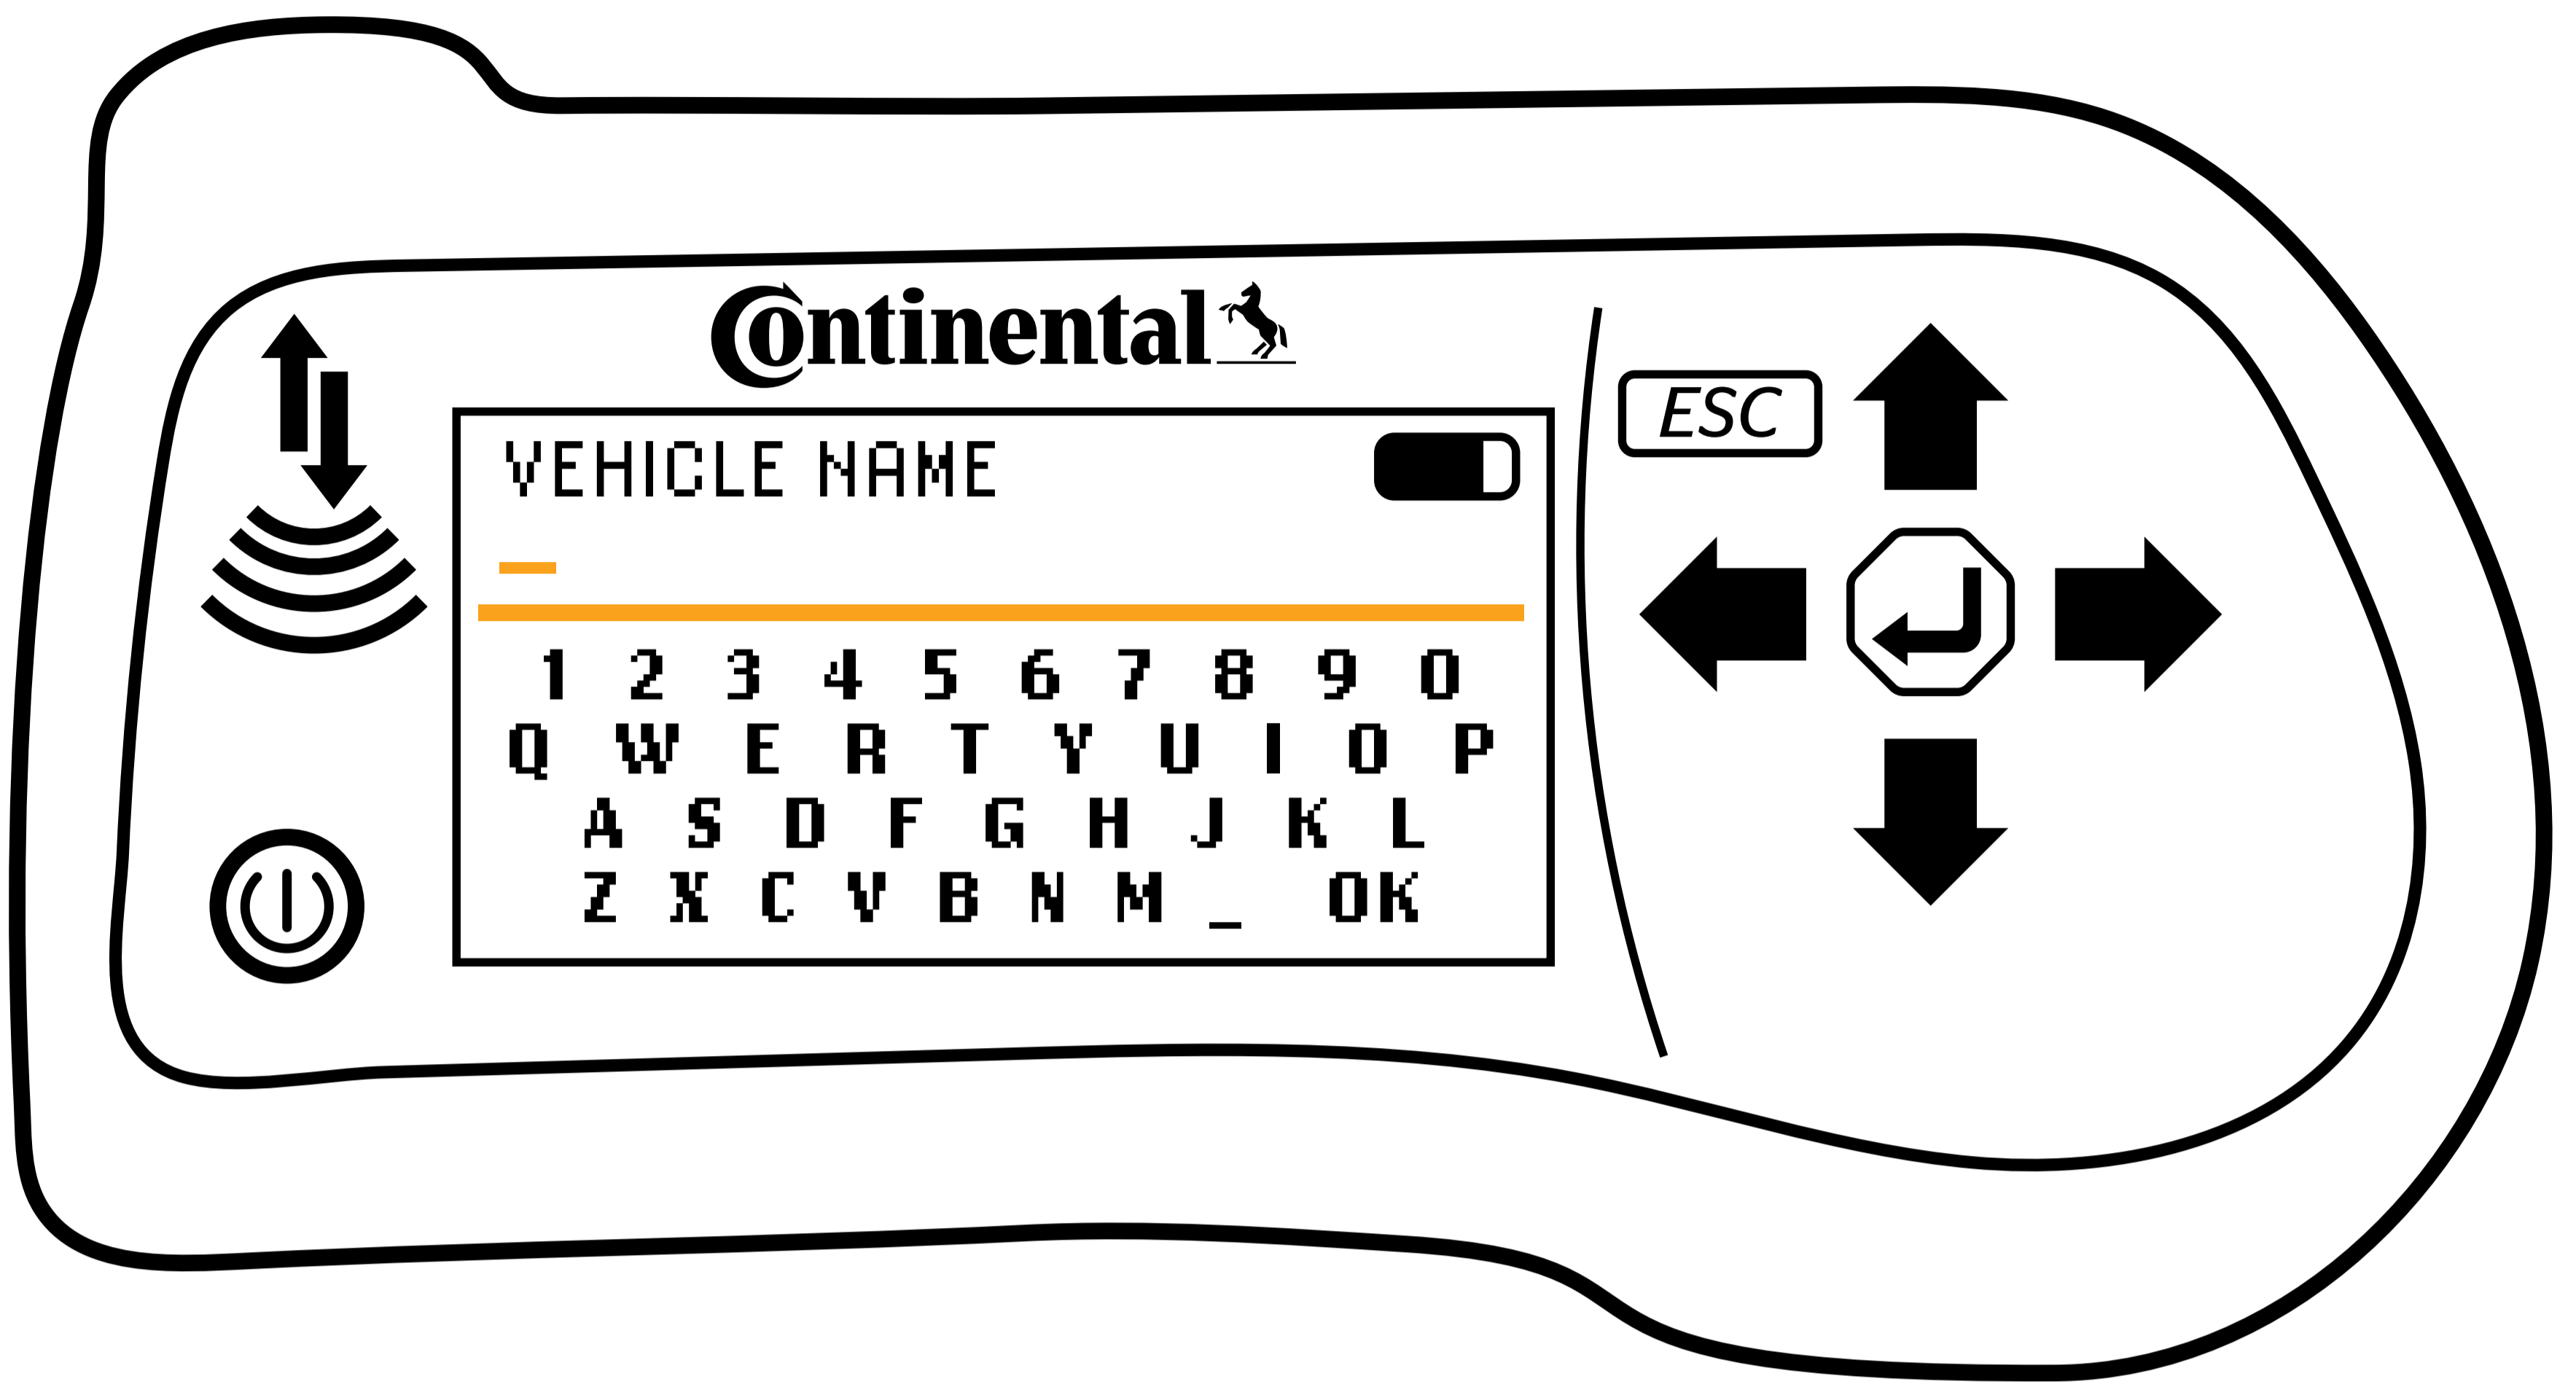


Enter the vehicle name or identification number you choose for that vehicle.

Program Tire Mounted Sensor for Yard

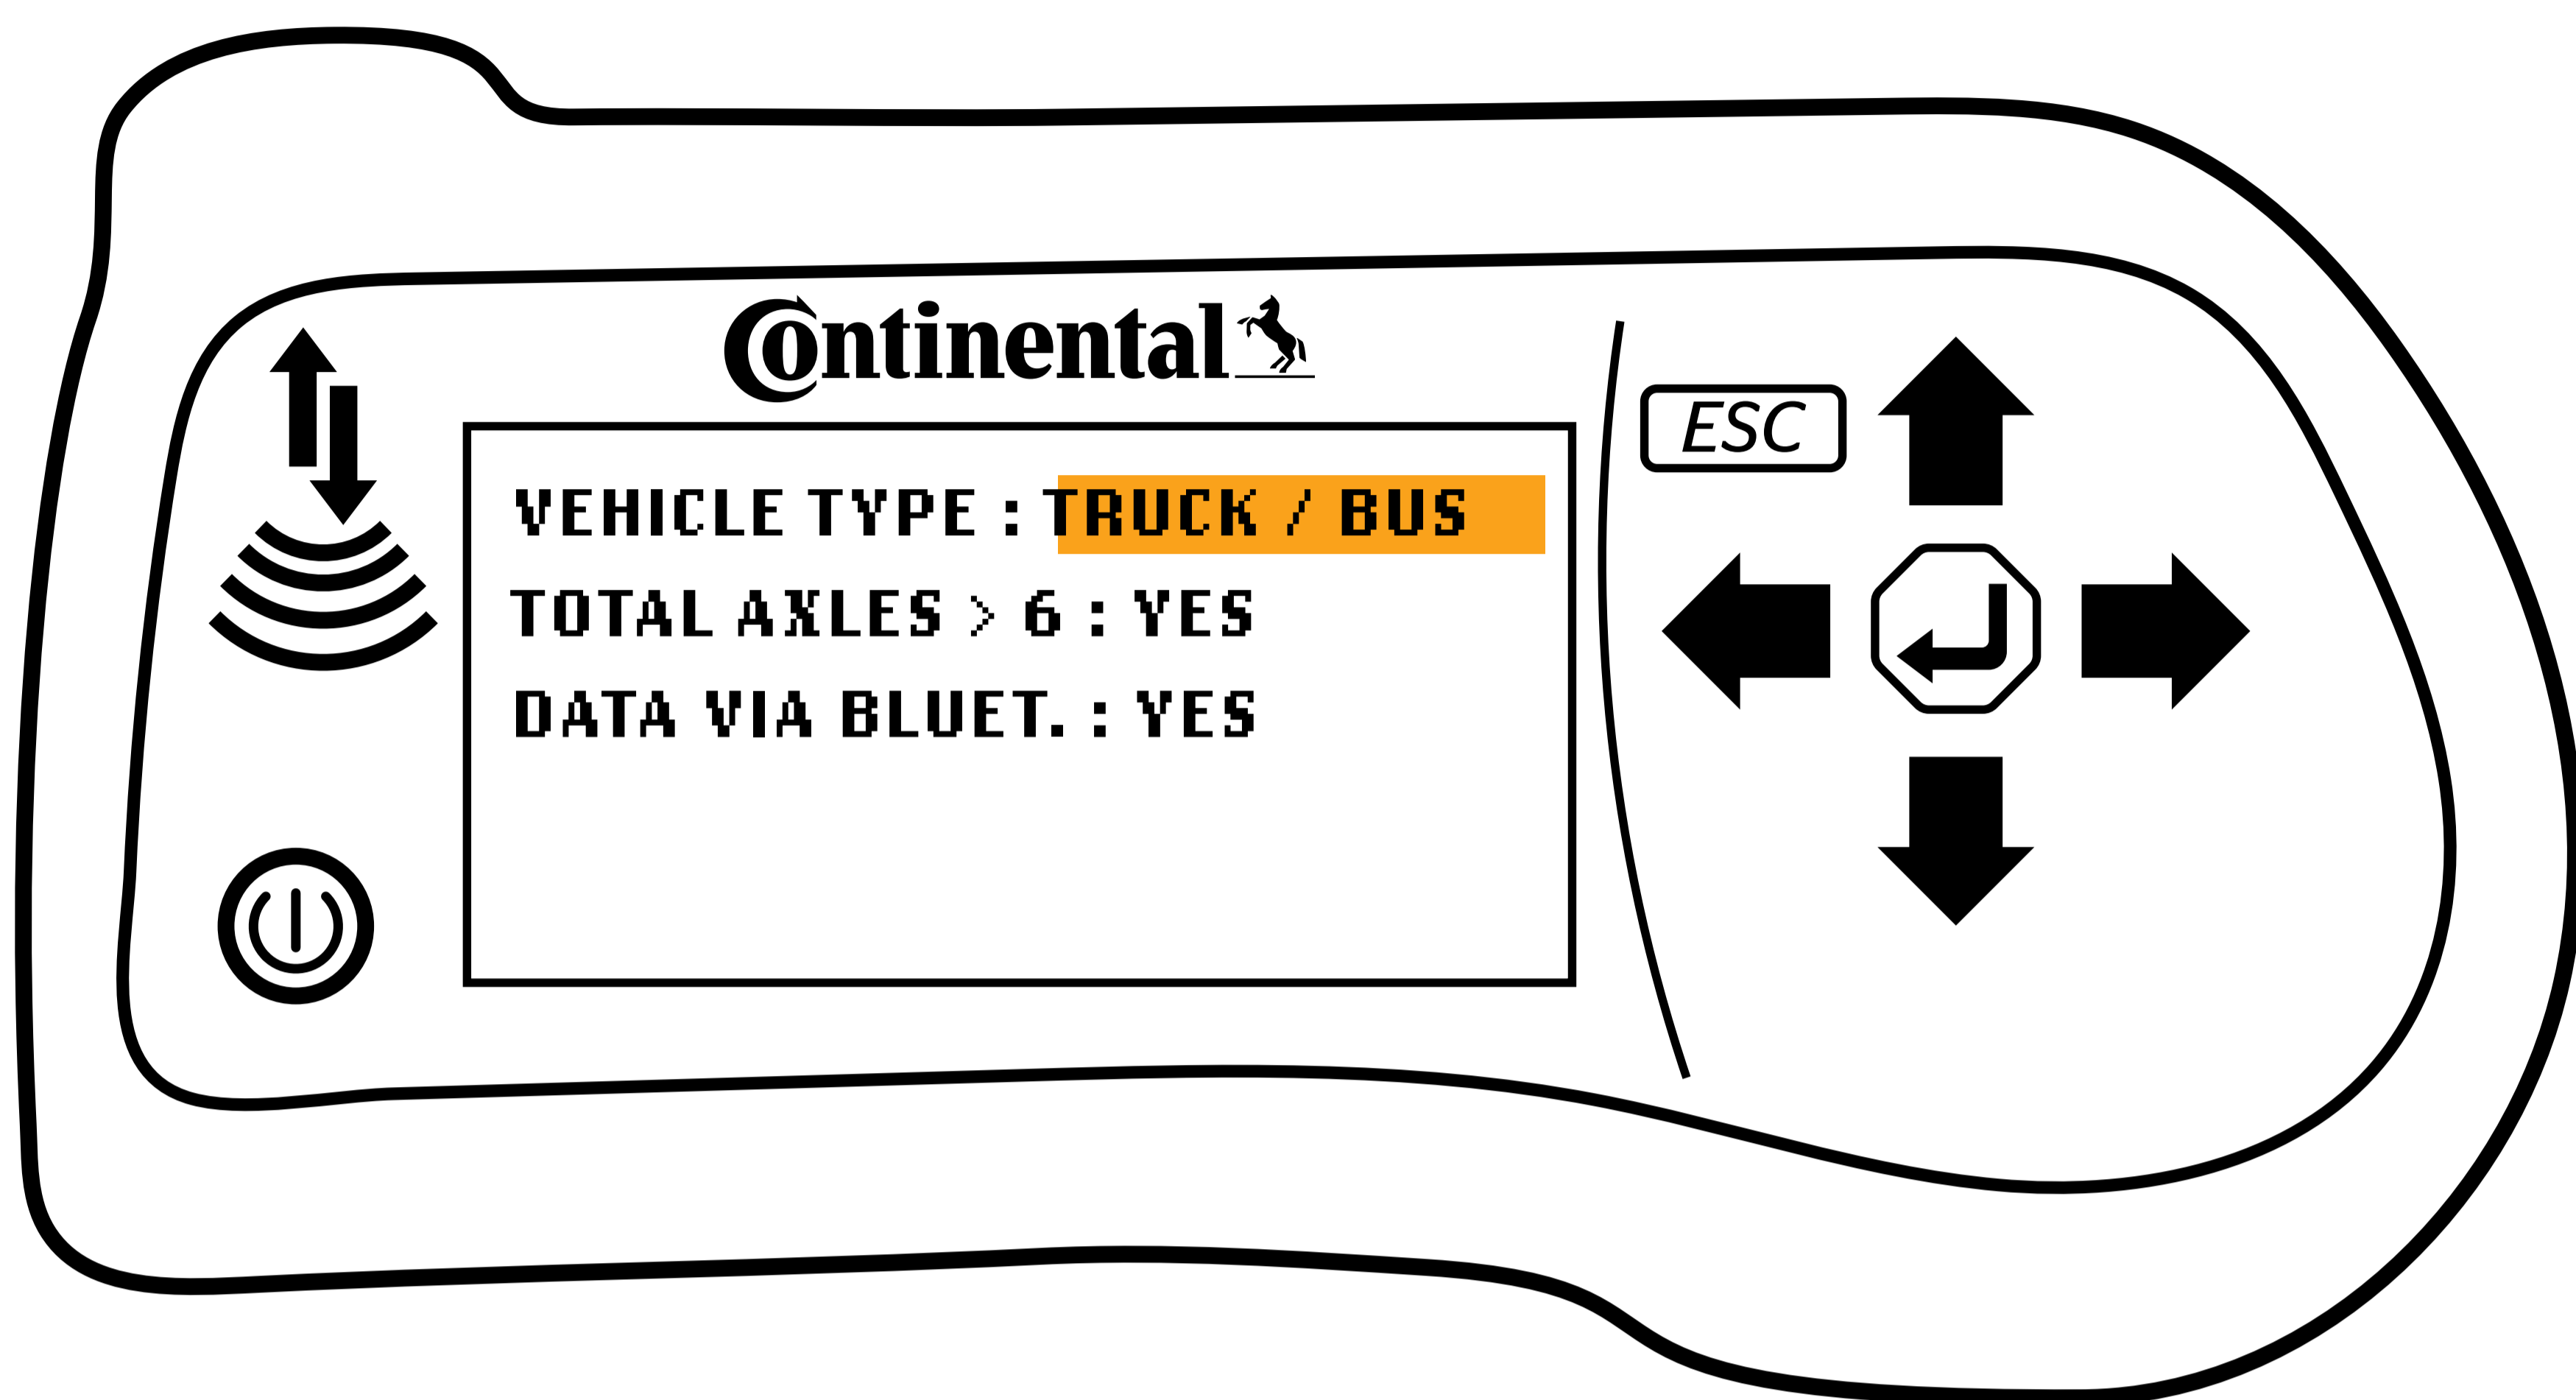


Toggle and select 'vehicle type'.
If vehicle has more than 6 axles,
select 'yes' - if fewer, select 'no'.
Select 'yes' for Data via Bluetooth.

Program Tire Mounted Sensor for Yard

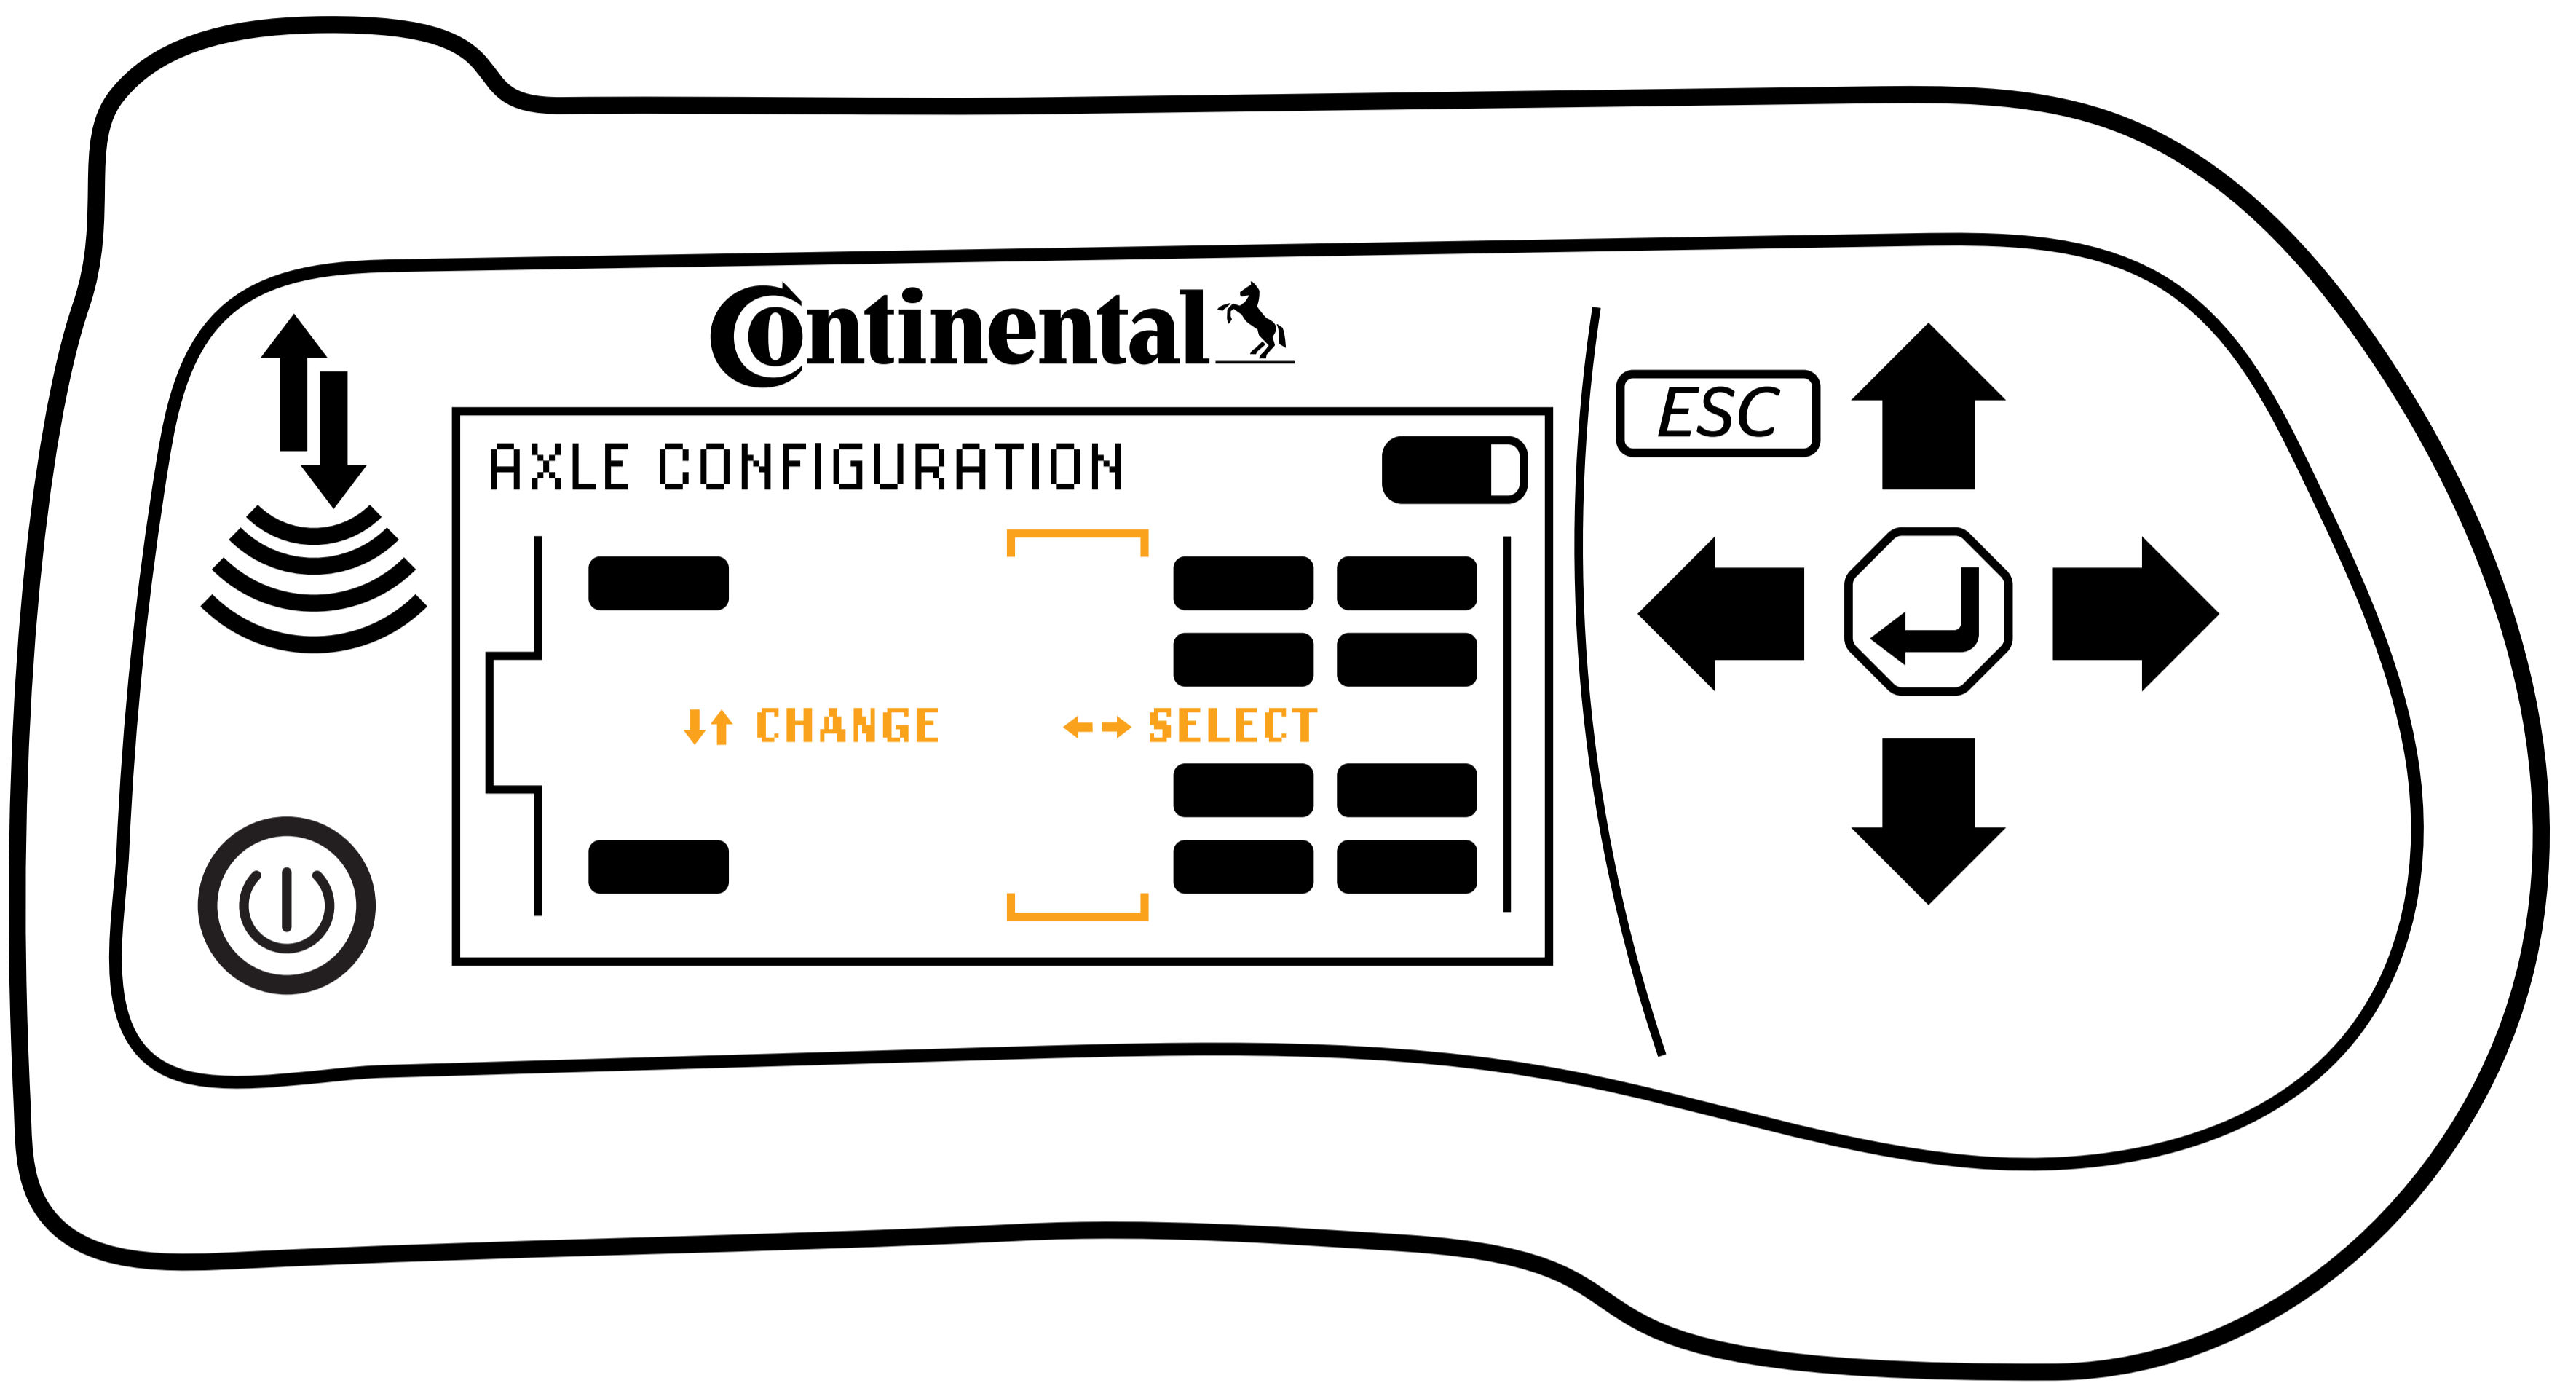

Change the axle configuration to match the vehicle if necessary.


Program Tire Mounted Sensor for Yard

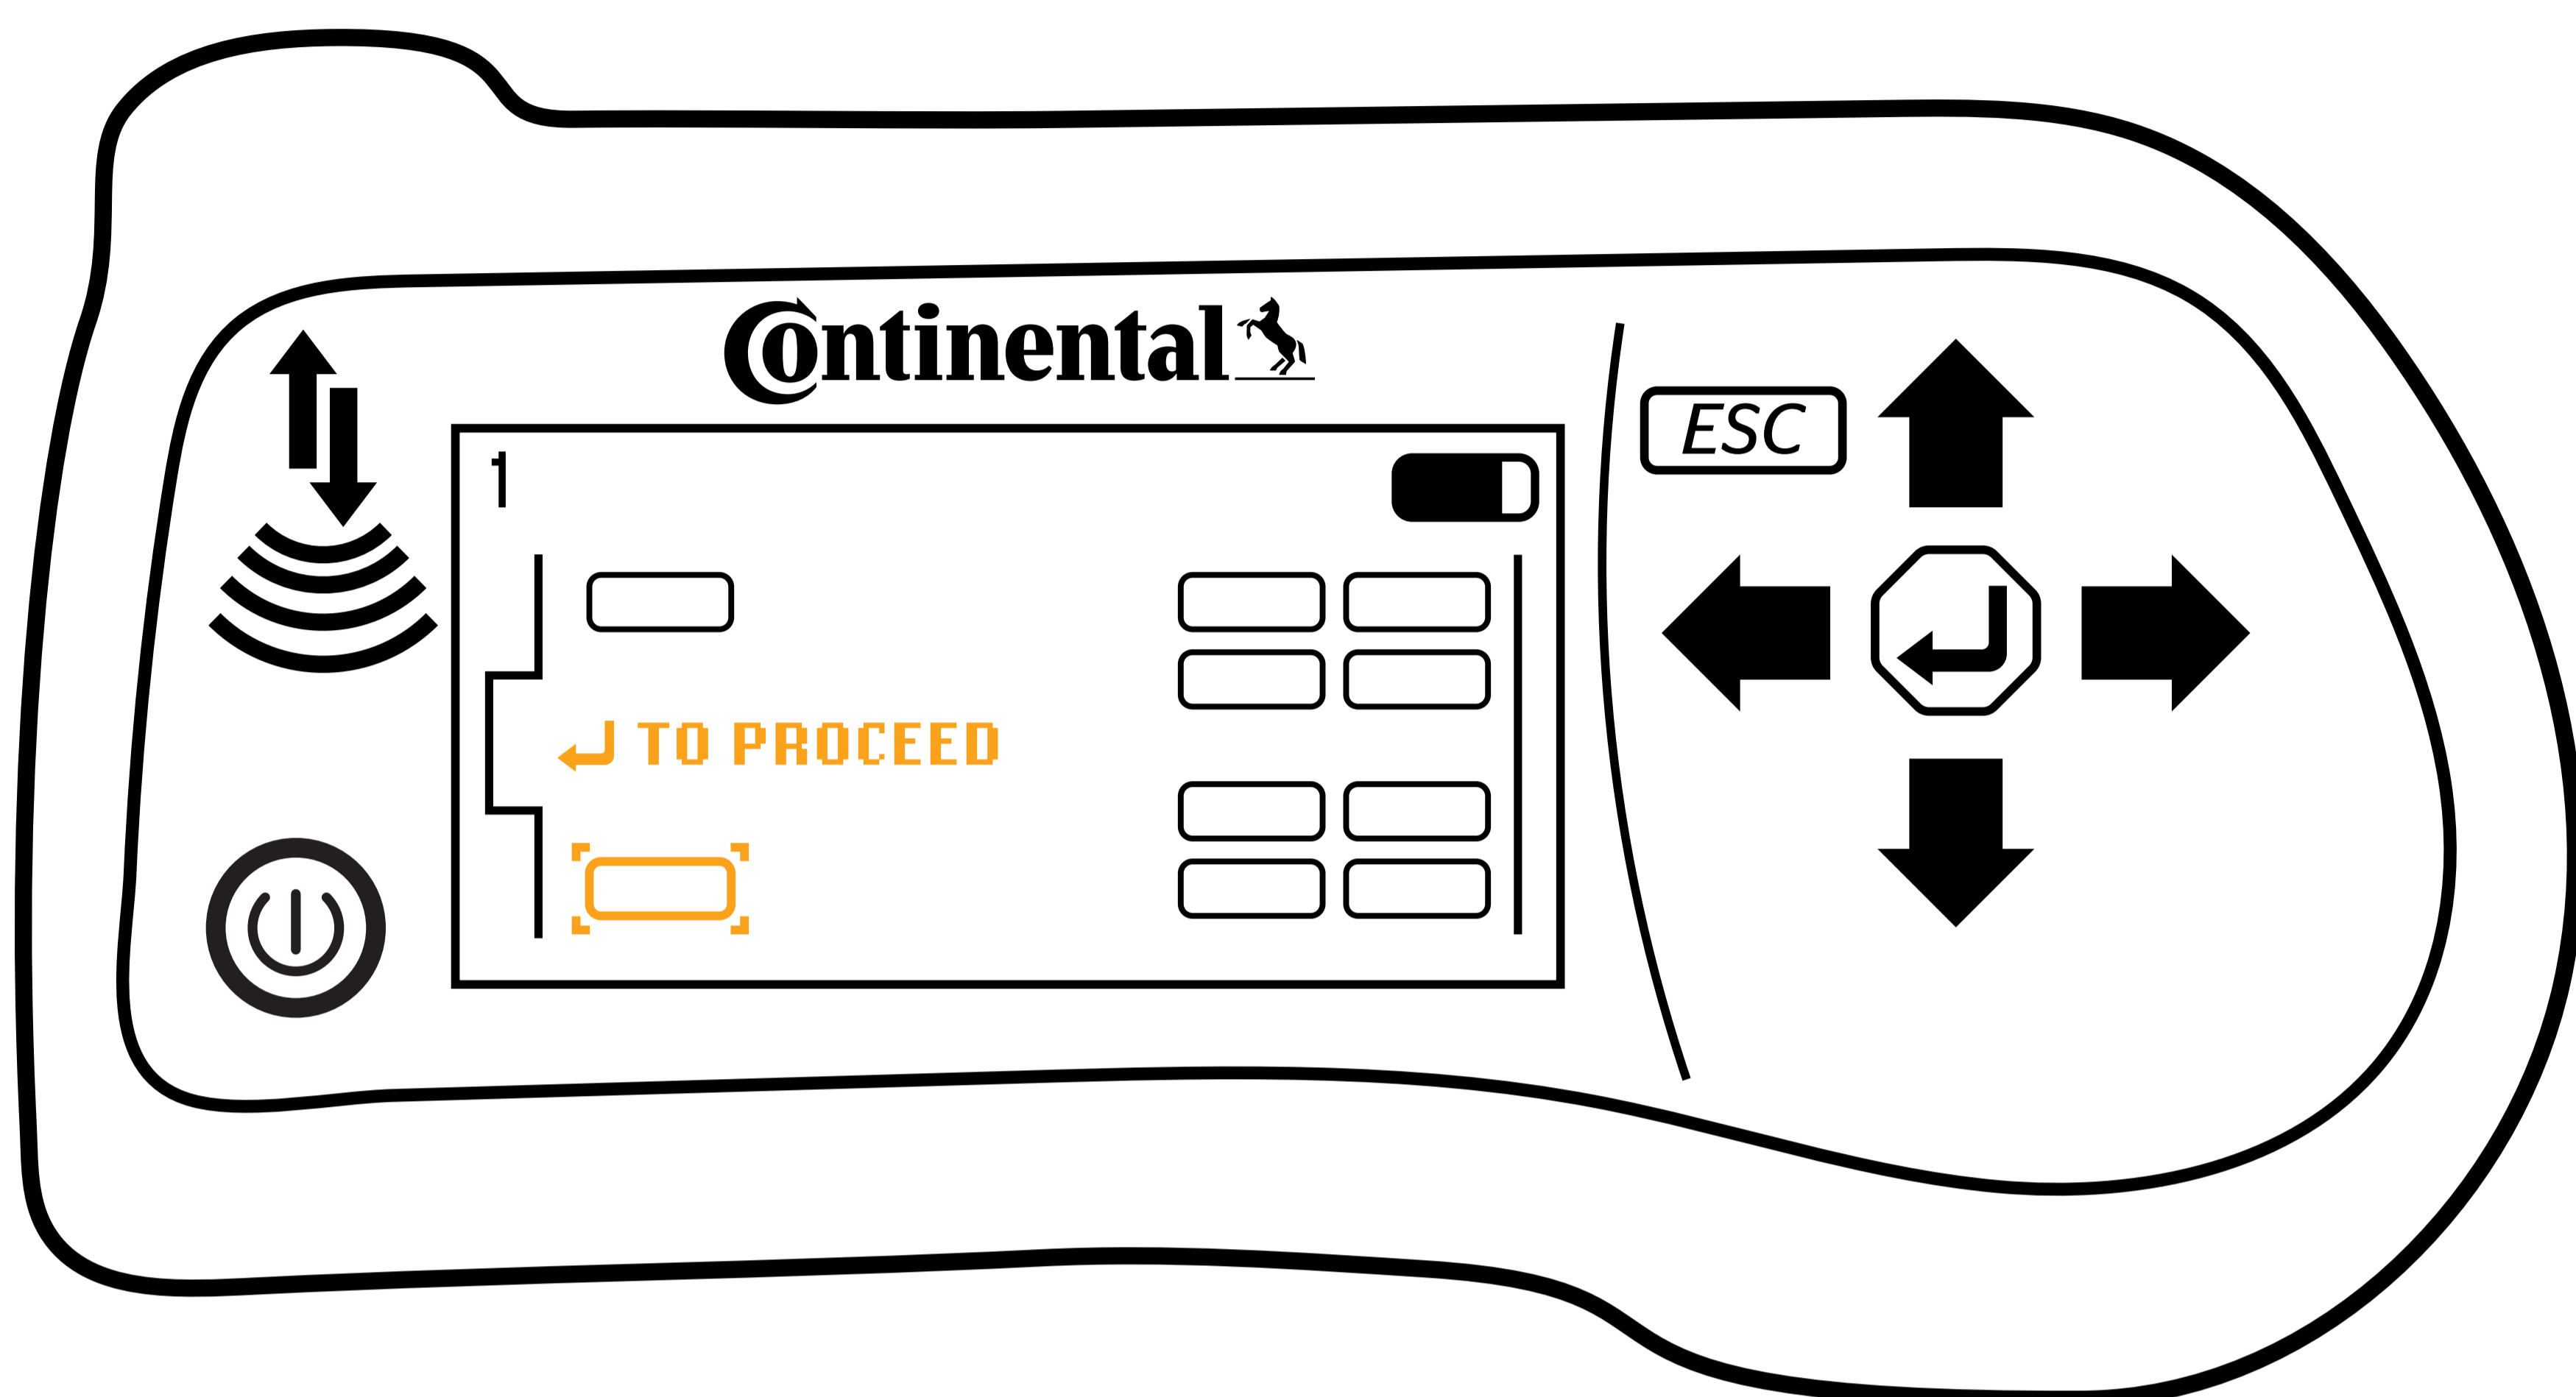

The HHT will show brackets around which tire you need to scan. The tool will vibrate when a sensor is detected and indicate current tire pressure.


Note: You can press 'ESC' on the HHT to skip scanning a tire if there is no sensor installed. If the HHT shows '!' on the tire, that means the sensor is loose or defective.

Program Tire Mounted Sensor for Yard

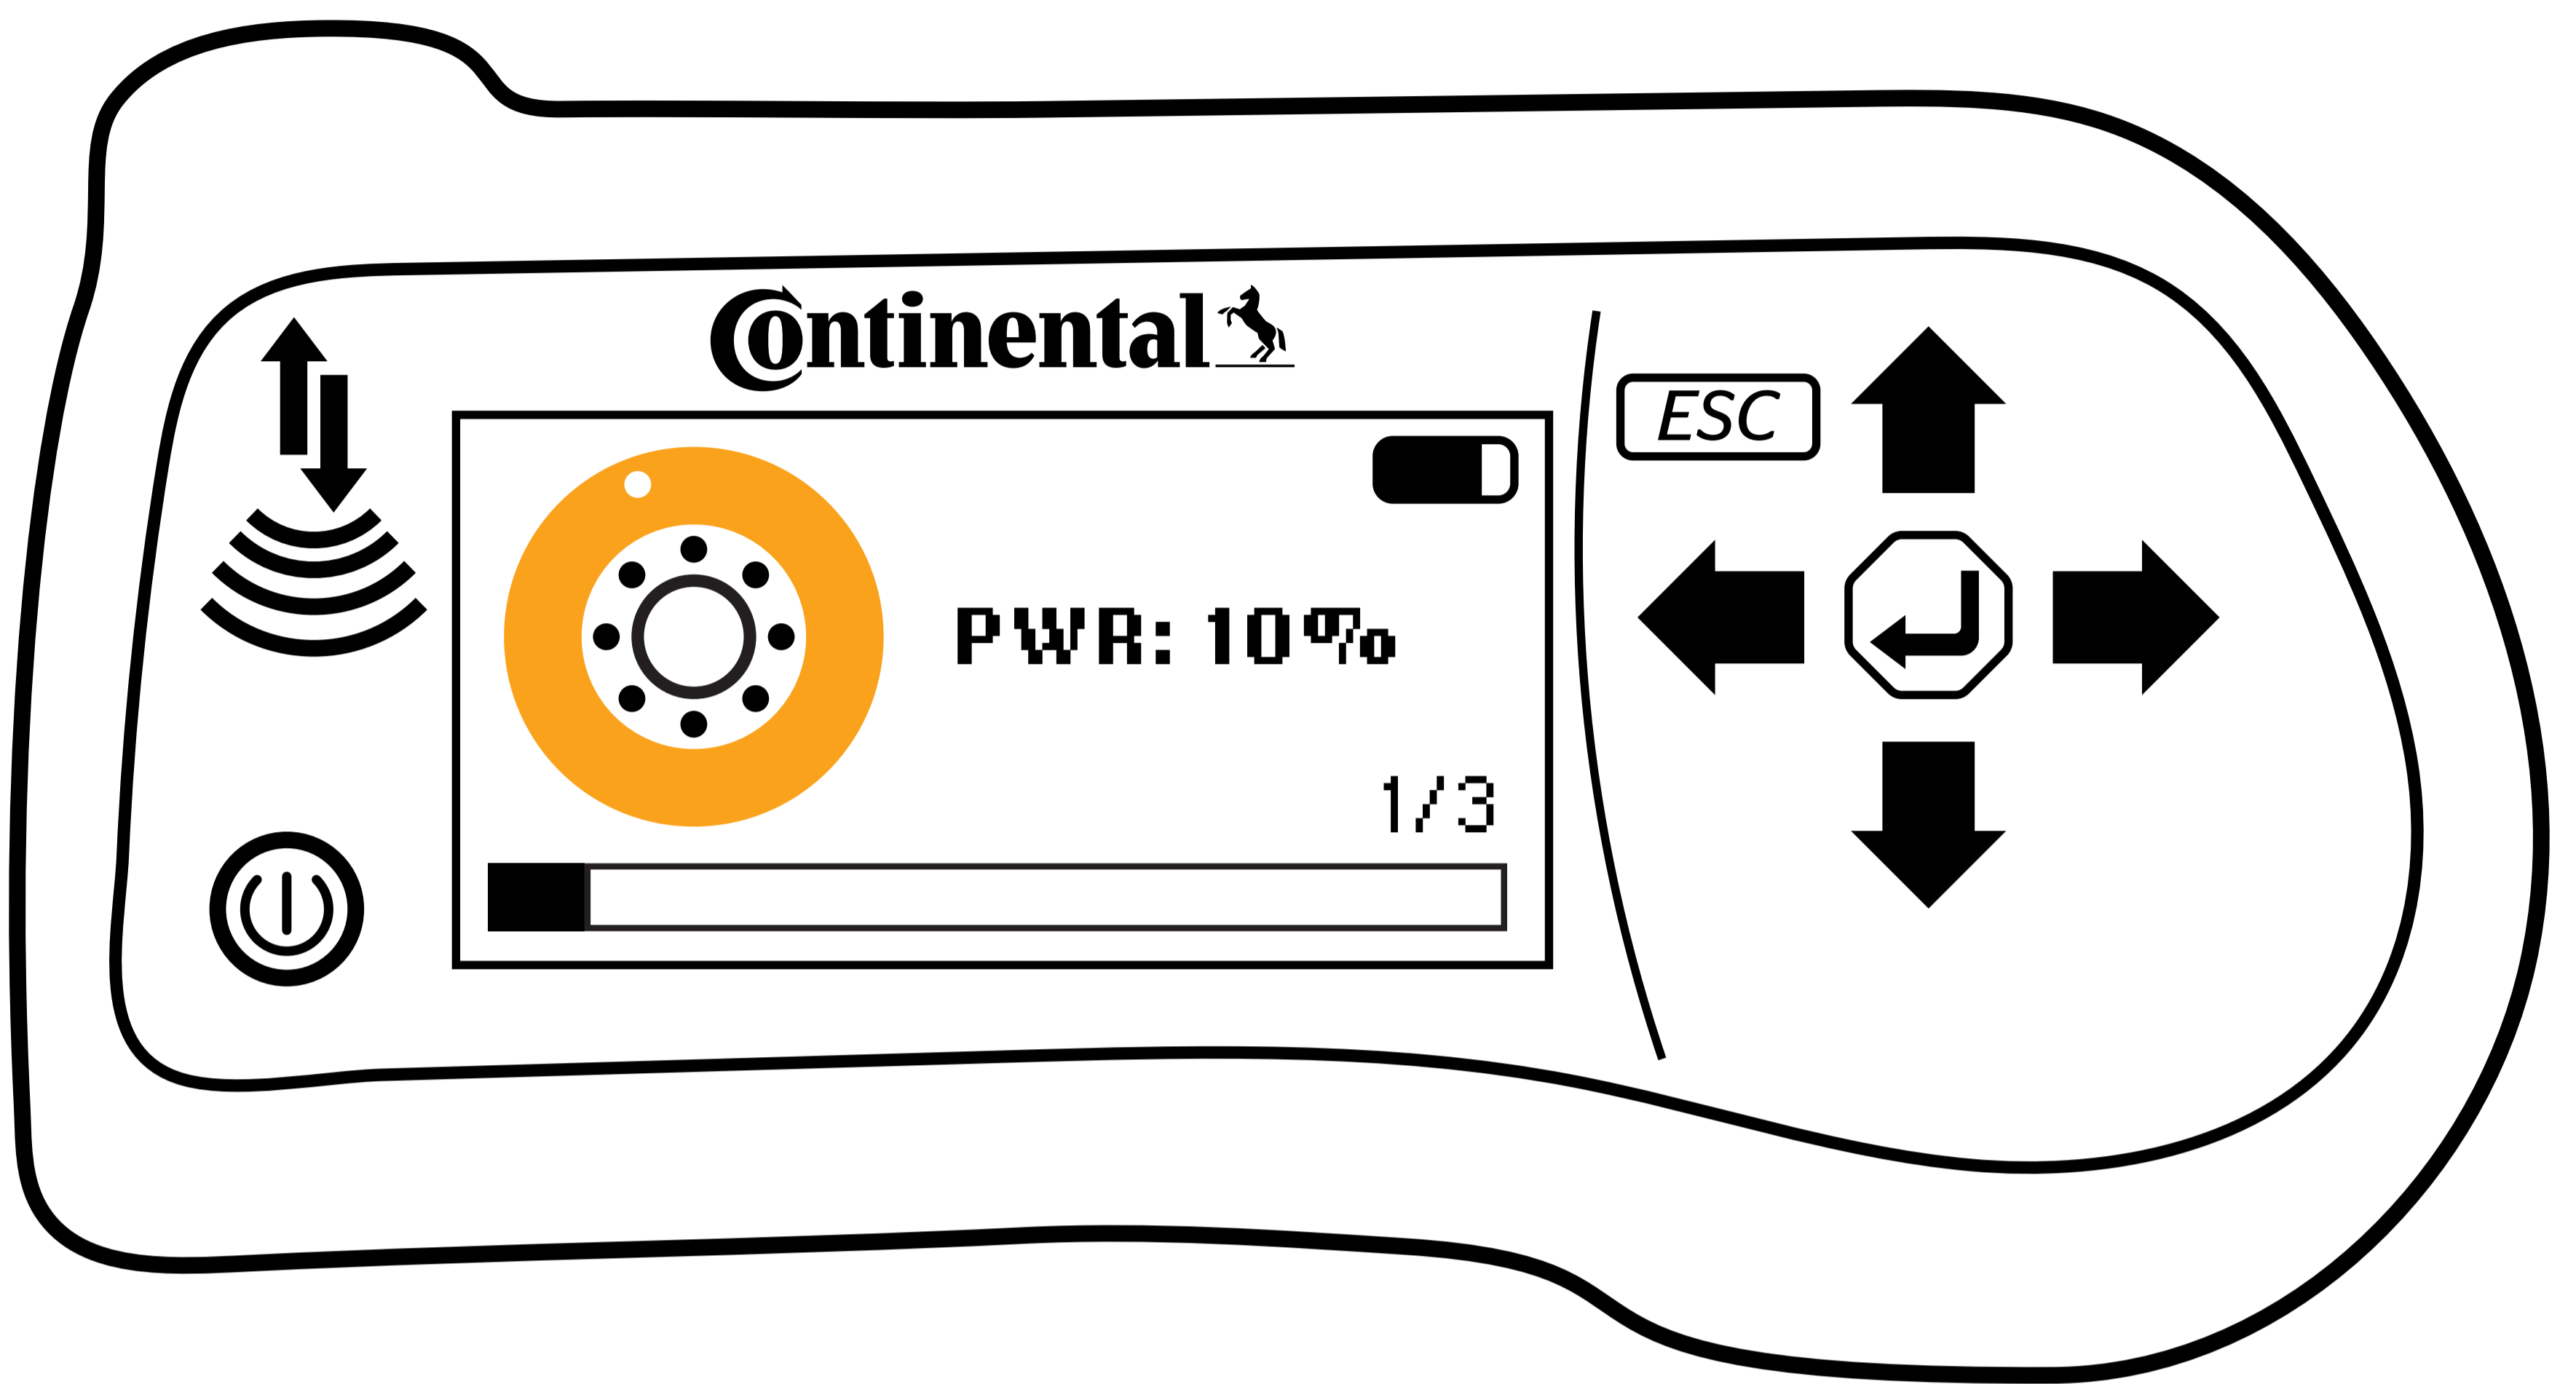

Repeat step 7 until all tires have been scanned. Scanning an inside dual tire is the same as scanning the outside tire in the same wheel position. 'Report File Stored' will appear when you are done.

Program Tire Mounted Sensor for Yard

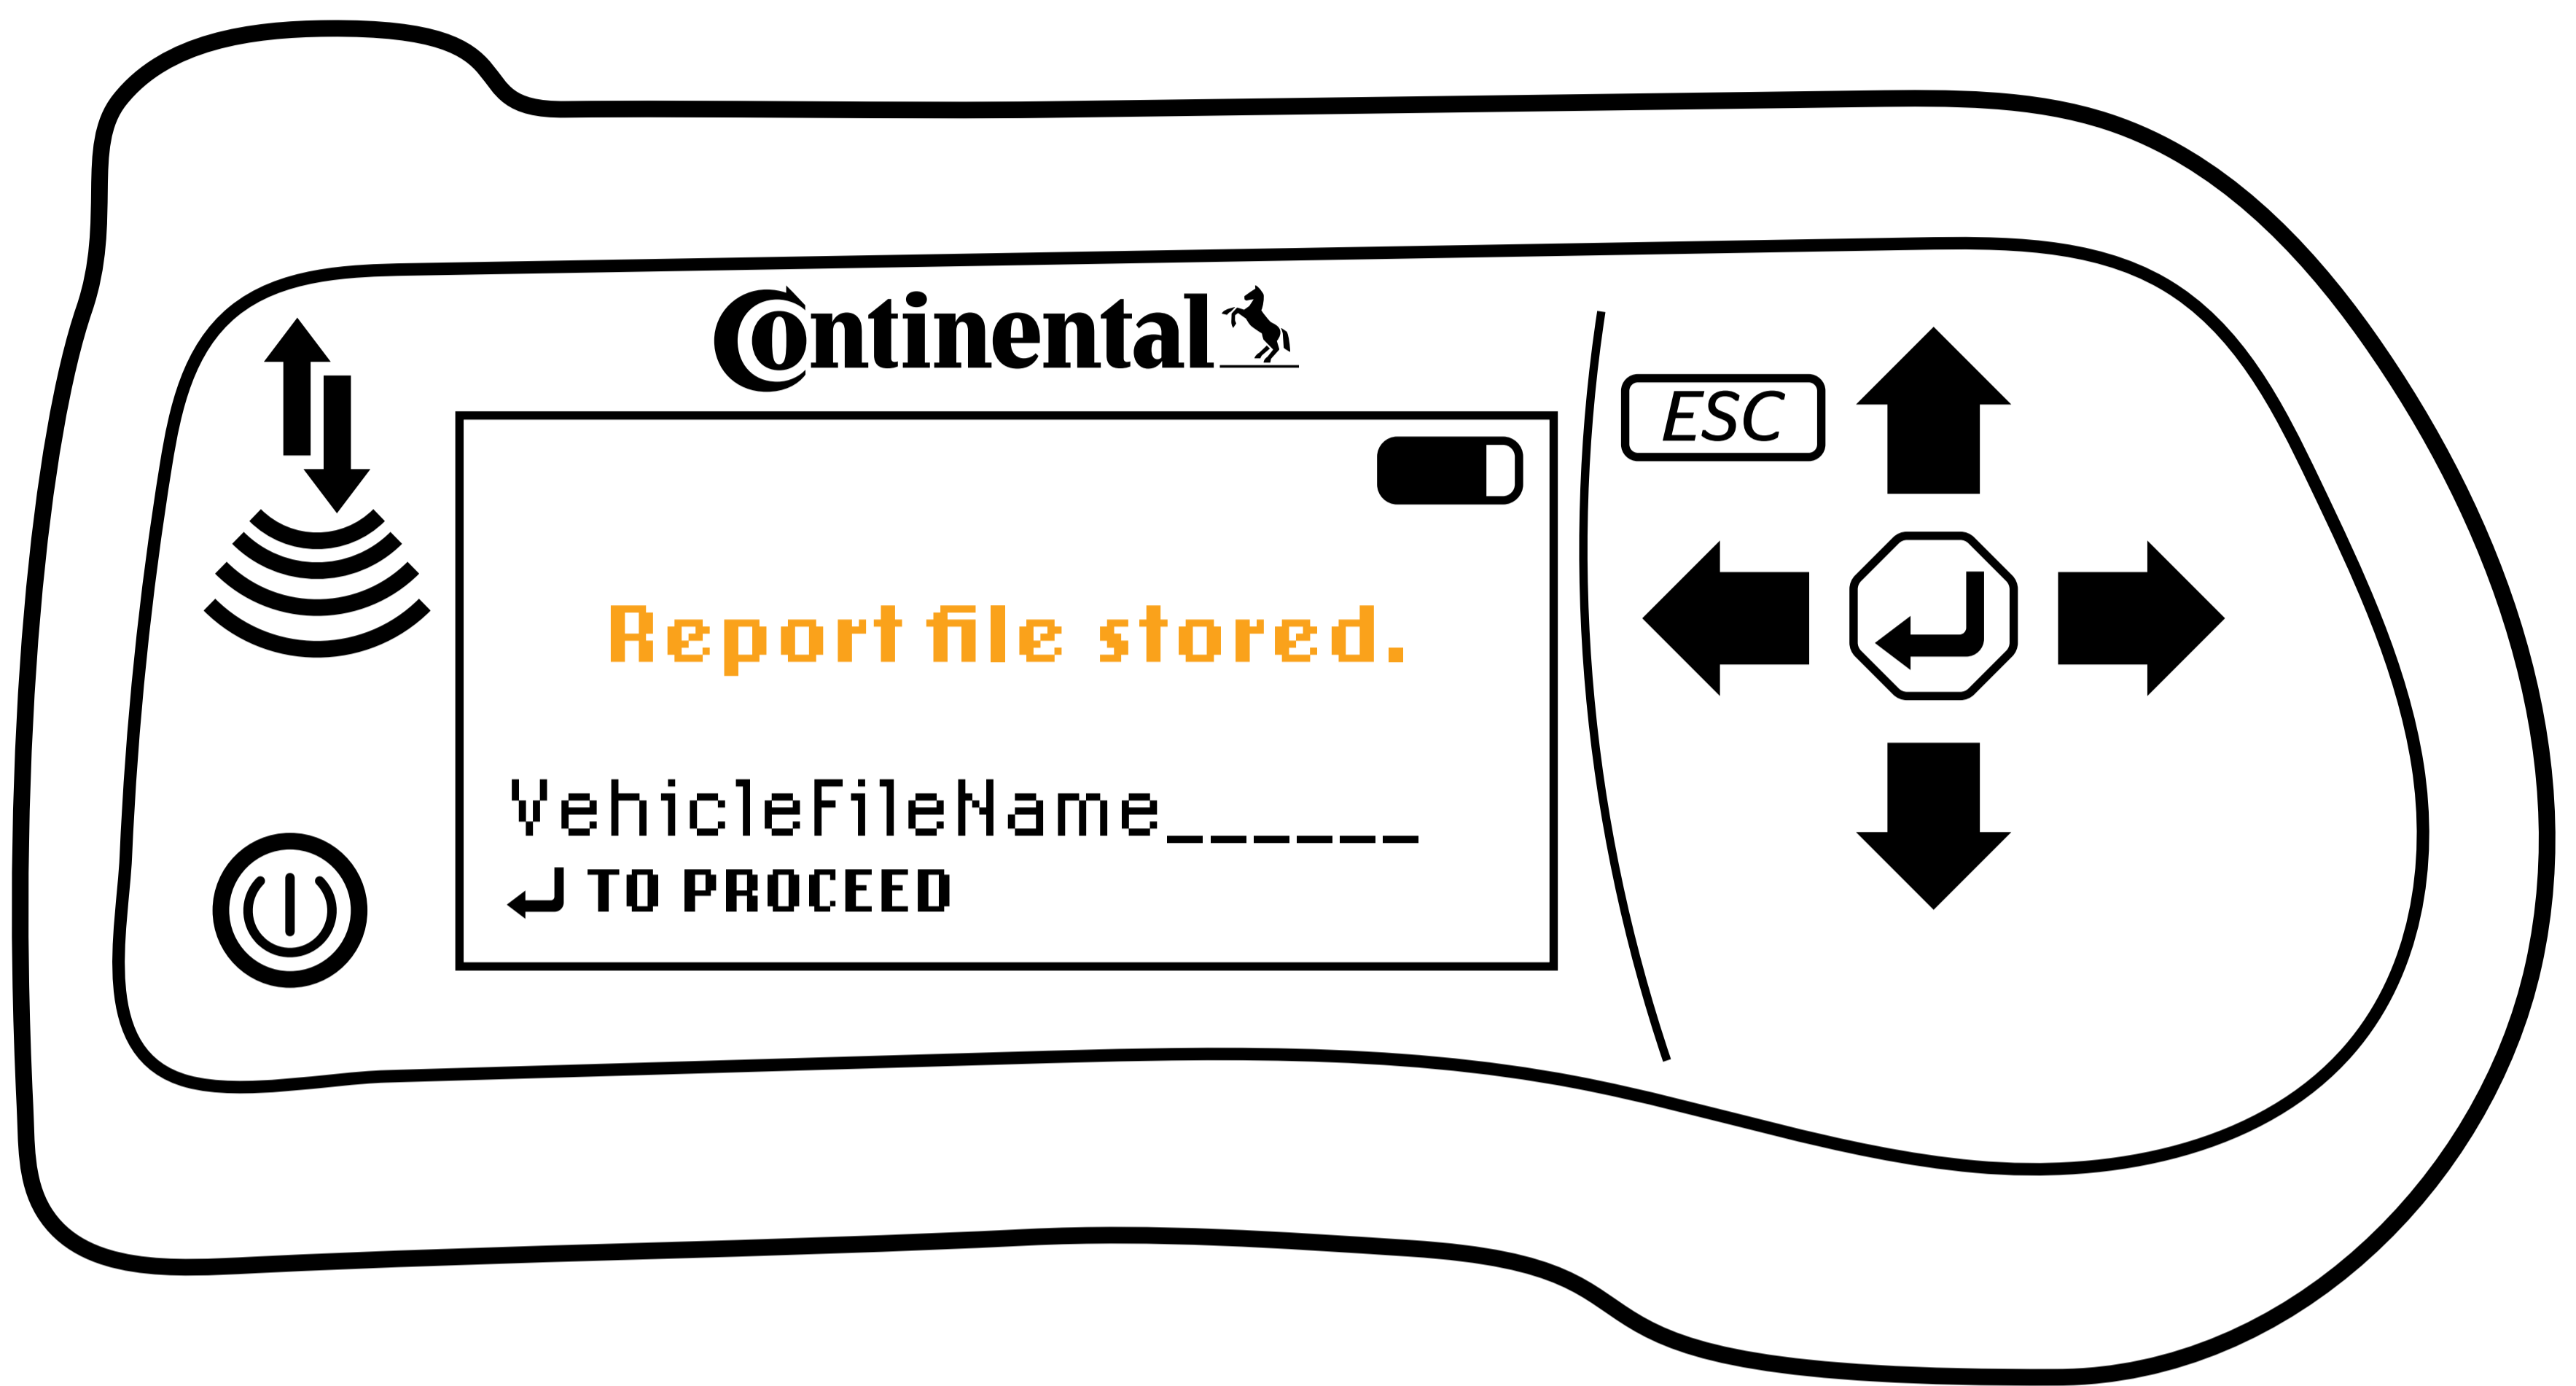

You are now ready to proceed with creating a new vehicle or updating an existing one on the ContiConnect platform.

Program Tire Mounted Sensor for Yard